


- 4. Easy installation on ceiling or wall, surface or flush mount.
- 5.IP67 [[[[]]] [[]]



1/3 [] [] [] [] [] [] [] [] [] [] [] [] []
PAL / NTSC
420TVL / 480TVL / 600TL 0000000
0 & 000000 00 000000 0000 00000 F1.2 000000 000000 000 000000) 000000 LED & 000 00000)
625TVL

00000	
	850NM
S / N & 0000 00000	00000 000000 00000 50 00 00000 0000 (AGC 00)
00000 000 000000 0000000 000 (AGC)	
000000 0000000 000 000000 LED	12 000000
IR 00000 LED 0000 00000	
	1 & VP-P_ 75 Ωcomposite
	□ & nbsp□□□□□ □
	0.45
	f3.6mm 2.8
	N / A
	M12XP0.5mm
	0-360 °
	12V 00000 DC & 10 ± 00000
	210mA
	76.4 60.5 56 MM
	215g
	IP67
	-10 ° C & 50 + 0000 & 000 0000 ° C

Camera Module Orientation Matches Letter Orientation Illustrated:

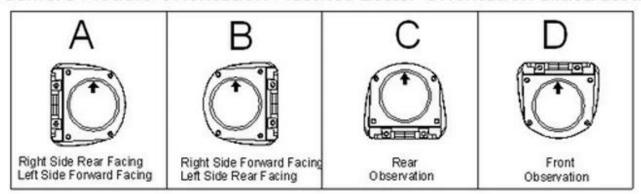







- :0000 000000 00000
- .000000 & 000000 & 000000 000000 000000 & 000000 &
- 1 0000 & :000 000000 .2PCS

- 2. We are a factory manufacturing, best production capability , best quality control, Best Service .
- 3.Inspected by the Inspection Institution of Bureau Veritas Certification.
- 4.1000 000000 QC & 000000 000000 000 000000 000000.
- 5. 00000 CE / 000000 / FCC 0000 00000 000000 000000 000000.