

4ch 1080p mobile dvr vehicle dvr bus dvr taxi dvr mdvr ,GPS 3G software for vehicle projects

product specification:

Item		parameter
Operating System		Linux
Language		English/chinese/customized
Video Compression		H.264 Compression
OSD		overlays information such as date time and vehicle ID
GUI	Graphical user interface	setup system parameters with the remote control
Video Record System	video input	4CH 960P/720P AHD input,aviation connector, 1.0Vp-p, 75Ω
	video output	1 CVBS, 1.0Vp-p, 75Ω,Aviation,Support 1CH Full Screen,4CH Screen view
	preview	Support 1 channel and 4 channels preview., Support Manual/Alarm Trigger full screen preview
	resolution	720P/D1/HD1/CIF, MAX:4 channels of 720P and 4 channels of D1
	image quality	1-4 levels, 1 is the highest level.
	video standard	PAL: 100f/s , CCIR625 line,50field; NTSC: 120f/s, CCIR525 line,60field; CIF: 256Kbps ~ 1.5Mbps, 8 level video quality optional; HD1: 600Kbps ~ 2.5Mbps, 8 level video quality optional; D1: 800Kbps ~ 3Mbps, 8 level video quality optional; 720P: 4Mbps-6Mbps, multi level video quality optional
	record mode	The default setting is auto recording after power on. Timed recording, alarm trigger recording and manual recording are supported.
Audio	audio input	4CH Aviation Plug Input
	audio output	2CH,headphone connect at front panel, BNC Connect on Back panel
	compression	G.726 compression, 8KB/s speed
Alarm Input		7CH Alarm Input,1CH AD Input,impulse speed input,Alarm Linkage
Alarm Output		2CH Alarm Output,Support Light/Sound alarm sensor,Oil/Power cut off
Interface		3CH RS232, POS/Fuel Sensor/LED Advertisement Connection
		1CH 485 Interface,Connect PTZ Camera
Wireless Transmission		Support Built in 3G transmission,, WCDMA, CDMA2000,GPRS, EDGE; Built in 4G module optional, TDD-LTE, FDD-LTE
GPS Position		Support Built GPS/BD Module
Storage	HDD	Max 2.5" 1TB HDD
	SD Card	Max 128GB SD Card Mirror Recording Keep Data Safety
	update	Support USB Updating, SD Card Updating,OTA Remote Updating
	file format	H.264
	file system	Special FAT32 File System
	USB	USB Interface on Front Panel for data back up by U Disk,Hard Disk
Record Replay	video search	Search By Record Time/Record Type etc
	playback	Max support 4CH Replay /Stop/Fast/Slow at same time Support forward and backward play at the speed of: x 2,x4,x8,x16.
Security		User/Admin 2 Level Different Password

Optional Functions	voice call	Support voice call each other
	TTS Voice broadcast	Support TTS voice broadcast function.
	serial expand	Support LED Advertisement Panel,Oil Sensor, POS, Bus Station Broadcaster, Car OBD, ect. external device
Voltage & Power	Power Management	Wide Voltage.Support Timed/Delay off
	Input Voltage	DC:+6V - +36V
	Output Voltage	+12V~1.5A,+5V~1.5A
	Power	Working<5W
Working Environment	Temperature	-20℃ - +70℃
	Humidity	20% - 80%
Others	Size	200 (D)* 187(W)* 62(H) mm
	Weight	1.90Kg

Product Show:



Factory Audit

SMS Device configure

OTA Remote Updating

8CH Full D1 Real time monitor

2TB HDD + 128GB SD Card

Richmor

OEM/ODM Customized

Factory Price

Independent R&D Tech

Low Moq




CE

FCC



ROHS





SMS Device configure
OTA Remote Updating
8CH Full D1 Real time monitor
2TB HDD + 128GB SD Card

Richmor

OEM/ODM Customized
Factory Price
Independent R&D Tech
Low Moq



CE

FC





AV Input & Output Cables



Power Cable



IO Cables



Remote Control



3G Antenna



WIFI Antenna




CD (Manual & Software Inside)



7000 HDD Mobile DVR


Product Introduction

Device Series

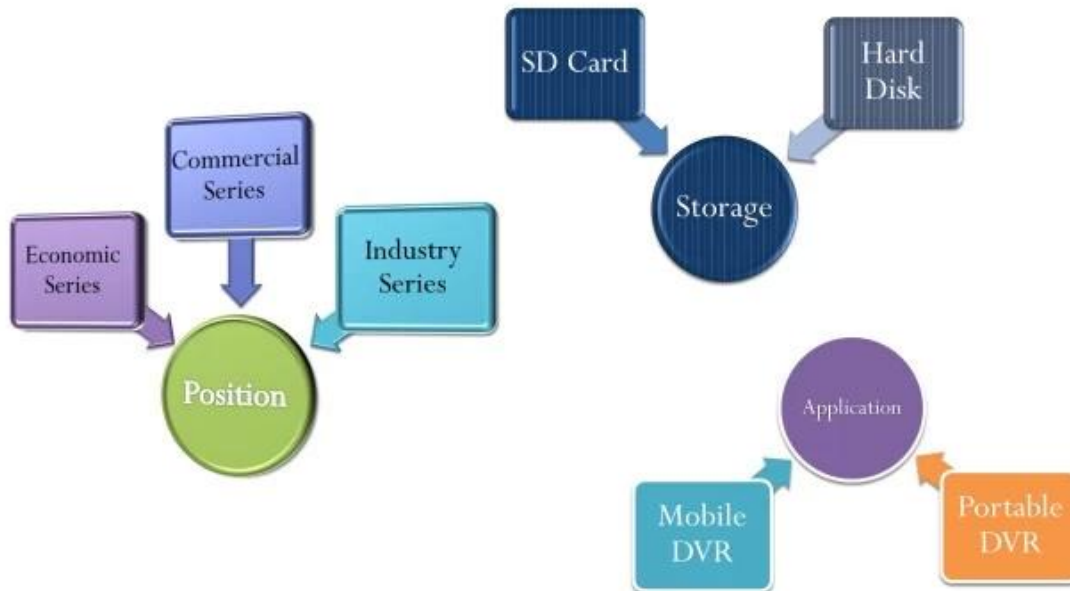

15

Product Advantage

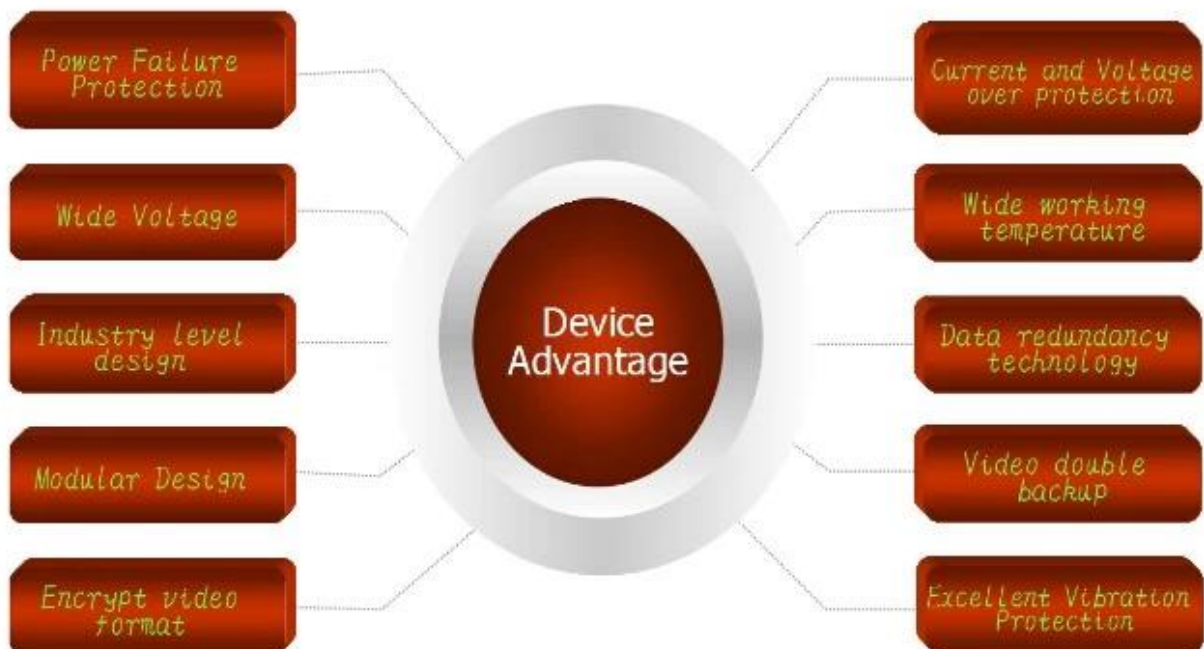

Client User Graph Interface

The interface is titled "移动视频监控平台" (Mobile Video Monitoring Platform). The top menu bar includes options like "欢迎登录, RCMTEST", "系统", "实时预览", "电子地图", "回放管理", "信息管理", and "系统设置".

The main content area is divided into a sidebar on the left and a central display. The sidebar contains a "终端列表" (Terminal List) with a tree view showing the hierarchy of devices. Below the list is a table with columns for "状态" (Status), "云台" (PTZ), "色彩" (Color), and "语音" (Voice).

The central display shows four video feeds labeled "贵C A6446 - CH1 - 0 KB/S", "贵C A6446 - CH2 - 24 KB/S", "贵C A6446 - CH3 - 0 KB/S", and "贵C A6446 - CH4 - 0 KB/S". The feeds show interior views of a vehicle and a road view. Below the feeds is a "GPS监控" (GPS Monitoring) section with a table showing real-time data for multiple terminals.







The bottom status bar displays system information: "运行时长: 00:01:04", "在线数: 3 / 定损数: 1 / 欠费: 0 / 总数: 11", "在线率: 27.27% / 定损率: 9.09%".

终端	GPS时间	位置	速度	报警
贵C A6446	2016-03-14 09:50:09	贵州省遵义市习水县G4215(蓉遵高速公路)	74.10 km/h(南)	
桂KY7507	2016-03-14 09:50:17	广西壮族自治区玉林市博白县人民中路38号	11.00 km/h(北)	
桂KY7569	2016-03-14 09:50:38	广西壮族自治区玉林市博白县X403	27.00 km/h(西北)	
桂KY7599	2016-03-14 09:49:03	广西壮族自治区玉林市博白县S216	0.00 km/h(东)	




our mdvr support mobile Client monitoring like PC, mobile phone etc.

[Anasayfa](#)[İndir](#)[Soru](#)[Language](#)

İstemci İndirme

 Windows İndir  Version: 7.4.0.15 Güncelle: 20151123	 İndir  Version: 7.0.3 Güncelle: 20150523	 İndir  Version: 7.0.0.10 Güncelle: 20150801
--	--	---

Uygun Program İndir

		
---	---	---

Appliacion

FUNCTIONS

- Video& Audio real-time monitoring
- Online Vehicle Status
- Satellite Map
- GPS
- Video Storage
- Tracking Display
- Intercom
- Fuel Sensor
- G-Sensor
- Temperature-Sensor

Richmor

OEM & ODM Service

Brasil World Cup Supplier
www.rcmcctv.com



Truck
Coach



School Bus
Bus






Police Car
Taxi



Support
All Vehicles

certificate

 Verification of Conformity <i>Attestation No.: L-0100000017</i>	
Responsible Party	Shenzhen Richour Technology Development Co., LTD.
Address	3F A10 West Longgang Road, Longgang New District, Shenzhen, China
Product	Cables
Model No.	RCH-PG01N, RCH-PG01S, RCH-LPG01N, RCH-LPG01S, RCH-BP01E, RCH-BP01S, RCH-SH01A, RCH-SH01B, RCH-JAGL, RCH-JAGS, RCH-AJ01, RCH-AJ02, RCH-AJ03, RCH-BD01N, RCH-BD02C, RCH-CM01B01
Trade Mark	Richour
Standards	IEC 60241-41 Part 1 Subject B; IEC 60332-1 Class C Important note: This device is in compliance with Part 11 of the EMC Rules and Regulations for safety bearings. Description of the product is supplied in the following two sections: (1) this device can cause harmful interference; and (2) the device must accept any electromagnetic immunity, emitting or receiving, from other external equipment. You need to conform to the applicable EMC Rules and Regulations. The method of testing was in accordance to the most appropriate measurement standards provided, and that all necessary steps have been followed to ensure that all manufacturer units of the same equipment will continue to comply with the Technical Commission's Commitment to Requirements.



 Manager
 April 10, 2012

Shenzhen ULCS Compliance Testing Service Ltd.
 Address: Longgang Park, Longgang Street, Bao'an Dist., Shenzhen City, Shenzhen
 Tel: +86(0)755-26074000 Fax: +86(0)755-26074001
 E-mail: info@ulcs.com.cn Web: www.ulcs.com.cn

Verification of Conformity	
Reference No.: LCB-00000000000000000000	
Responsible Party :	Shenzhen Weichuan Technology Development Co., LTD.
Address:	#F 4th Fl West Longgang Road, Longhua New District, Shenzhen, China
Product:	Battery Charger
Model No.:	WCH-M0000000, WCH-M0000000, WCH-M0000000, WCH-M0000000, WCH-M0000000, WCH-M0000000, WCH-M0000000, WCH-M0000000
Type Mark:	RoHSmark
Standards:	FCC CISR #T PART II Subpart C-101, FCC CISR #A-2000
<p>Important notes:</p> <p>This device is in conformance with Part 15 of the FCC Rules and Regulations for radio frequency devices. Operation of the product is subject to the following two conditions:</p> <ul style="list-style-type: none"> (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. <p>It may exceed its compliance with the applicable FCC Rules and Regulations. The national labeling was in accordance with the most accurate measurement capabilities available, and that all necessary steps have been exhausted to ensure that all production units of the same equipment will continue to comply with the Federal Communications Commission's requirements.</p>	
 Date: April 15, 2013	
Shenzhen LCB Compliance Testing Laboratory Ltd. 1/F, Kingstone Industrial Park, Tonghe Street, Baoan Dist., Baoan City, Shenzhen, Guangdong, China Tel: 86-(0)755-2600-1000 http://www.lcb-test.com	
Fax: 86-(0)755-2600-1001 Email: info@shenzhenlcb.com	

CERTIFICATE OF CONFORMITY

CERTIFICATE of Conformity

Reference No.: CCB070030475

Applicant	Shenzhen Rixin Technology Development Co., Ltd.
Address	1/F, Wujiu Road, Longgang Street, Longhua New District, Shenzhen, China
Product	Mobile DVR
Model	RCM-8000A, RCM-8000B, RCM-8000C, RCM-8000D, RCM-8000E, RCM-8000F, RCM-8000G, RCM-8000H
Trade Mark	Rixin

The applicant products have been tested by us with the follow procedure and found in compliance with the following European Directives:

The EMC Directive 2004/108/EC

EN 55022: 2005, EN 55024: 2005

The tests were performed in normal operating mode. The test results apply only to the particular sample tested and to the specific site cannot test. This certificate applies specifically to the sample investigated in our test laboratory number only.

The CE markings as shown below can be affixed on the product after completion of necessary technical documentation.

(Please consult Declaration form to be attached)

Manager
April 18, 2011

Shenzhen CCC Compulsory Testing Laboratory Ltd.
1/F, Jingqian Industrial Park, Jingqian Street, Nanshan District, Shenzhen
Guangdong, China
Tel: 0086-755-26741111 Fax: 0086-755-26741122
http://www.ccc-p.com Email: admin@ccc-p.com

	
<h1 style="text-align: center;">CERTIFICATE of Conformity</h1> <p style="text-align: center;">Reference No.: CCB0104000019</p>	
Purchaser	Shenzhen Longman Technology Development Co., LTD.
Addressee	3F South West Longman Road, Longman New District, Shenzhen, China
Product	Speakers
Models	RGM-SPC10A, RGM-SPC10B, RGM-LAC10A, RGM-SPC10E, RGM-MP10A, RGM-MP10B, RGM-SAL, RGM-HAS, RGM-DAB, RGM-FM10D, RGM-CAP10, RGM-SAR, RGM-BASS, RGM-DSB, RGM-DETECT, RGM-DETECTS, RGM-COMPASS
Trade Mark	Boschman
<p>The submitted products have been tested by us with the latest standards and found in compliance with the following European Directives:</p> <p>The EMC Directive 2004/10/EC</p> <p>(EN 55022:2005, EN 55024:2005)</p> <p>The tests were performed in normal operation mode. The test results apply only to the particular sample tested and to the specific tests carried out. This certificate attests conformity to the samples investigated in our test reference number 4916.</p> <p>The CE markings on stated labels can be affixed on the product after inspection of satisfactory technical documentation.</p> <p>(This document is binding force to be observed)</p>	
<div style="display: flex; justify-content: space-between; align-items: center;"> <div>  </div> <div>  April 10, 2013 </div> </div> <p style="margin-top: 20px;"> Witnessing Lab's Compliance Testing Laboratory Ltd. 3/F, Jingnan Industrial Park, Tongxin Road, Bao'an Dist., Shenzhen District, Shenzhen, Guangdong, China Tel: 86(0)755-26214218 Fax: 86(0)755-26214219 E-mail: info@witnessing-lab.com.cn http://www.witnessing-lab.com </p>	

CERTIFICATE OF CONFORMITY

CERTIFICATE OF CONFORMITY

CERTIFICATE OF CONFORMITY

CERTIFICATE OF CONFORMITY

CERTIFICATE

of Conformity
 (2013/0501) Association of Nations: Indonesia

Reference No.: **LCI-019-000078**

When tested as specified, the candidate sample complies with the requirements of Commission Decision of P. 443 / 2013 amending Decision (2013/0501).

Applicant	Shenzhen Electronic Technology Development Co., LTD.
Address	31 World Wind Longgang Road, Longgang New District, Shenzhen, China
Trade Mark	Redmine
Model	Various
Product	ROM-PC101, ROM-PC102, ROM-PC103, ROM-PC104, ROM-PC105, ROM-PC106, ROM-PC107, ROM-PC108, ROM-PC109, ROM-PC110, ROM-PC111, ROM-PC112, ROM-PC113, ROM-PC114, ROM-PC115, ROM-PC116, ROM-PC117, ROM-PC118, ROM-PC119, ROM-PC120, ROM-PC121, ROM-PC122, ROM-PC123, ROM-PC124, ROM-PC125, ROM-PC126, ROM-PC127, ROM-PC128, ROM-PC129, ROM-PC130, ROM-PC131, ROM-PC132, ROM-PC133, ROM-PC134, ROM-PC135, ROM-PC136, ROM-PC137, ROM-PC138, ROM-PC139, ROM-PC140, ROM-PC141, ROM-PC142, ROM-PC143, ROM-PC144, ROM-PC145, ROM-PC146, ROM-PC147, ROM-PC148, ROM-PC149, ROM-PC150, ROM-PC151, ROM-PC152, ROM-PC153, ROM-PC154, ROM-PC155, ROM-PC156, ROM-PC157, ROM-PC158, ROM-PC159, ROM-PC160, ROM-PC161, ROM-PC162, ROM-PC163, ROM-PC164, ROM-PC165, ROM-PC166, ROM-PC167, ROM-PC168, ROM-PC169, ROM-PC170, ROM-PC171, ROM-PC172, ROM-PC173, ROM-PC174, ROM-PC175, ROM-PC176, ROM-PC177, ROM-PC178, ROM-PC179, ROM-PC180, ROM-PC181, ROM-PC182, ROM-PC183, ROM-PC184, ROM-PC185, ROM-PC186, ROM-PC187, ROM-PC188, ROM-PC189, ROM-PC190, ROM-PC191, ROM-PC192, ROM-PC193, ROM-PC194, ROM-PC195, ROM-PC196, ROM-PC197, ROM-PC198, ROM-PC199, ROM-PC200, ROM-PC201, ROM-PC202, ROM-PC203, ROM-PC204, ROM-PC205, ROM-PC206, ROM-PC207, ROM-PC208, ROM-PC209, ROM-PC210, ROM-PC211, ROM-PC212, ROM-PC213, ROM-PC214, ROM-PC215, ROM-PC216, ROM-PC217, ROM-PC218, ROM-PC219, ROM-PC220, ROM-PC221, ROM-PC222, ROM-PC223, ROM-PC224, ROM-PC225, ROM-PC226, ROM-PC227, ROM-PC228, ROM-PC229, ROM-PC230, ROM-PC231, ROM-PC232, ROM-PC233, ROM-PC234, ROM-PC235, ROM-PC236, ROM-PC237, ROM-PC238, ROM-PC239, ROM-PC240, ROM-PC241, ROM-PC242, ROM-PC243, ROM-PC244, ROM-PC245, ROM-PC246, ROM-PC247, ROM-PC248, ROM-PC249, ROM-PC250, ROM-PC251, ROM-PC252, ROM-PC253, ROM-PC254, ROM-PC255, ROM-PC256, ROM-PC257, ROM-PC258, ROM-PC259, ROM-PC260, ROM-PC261, ROM-PC262, ROM-PC263, ROM-PC264, ROM-PC265, ROM-PC266, ROM-PC267, ROM-PC268, ROM-PC269, ROM-PC270, ROM-PC271, ROM-PC272, ROM-PC273, ROM-PC274, ROM-PC275, ROM-PC276, ROM-PC277, ROM-PC278, ROM-PC279, ROM-PC280, ROM-PC281, ROM-PC282, ROM-PC283, ROM-PC284, ROM-PC285, ROM-PC286, ROM-PC287, ROM-PC288, ROM-PC289, ROM-PC290, ROM-PC291, ROM-PC292, ROM-PC293, ROM-PC294, ROM-PC295, ROM-PC296, ROM-PC297, ROM-PC298, ROM-PC299, ROM-PC300, ROM-PC301, ROM-PC302, ROM-PC303, ROM-PC304, ROM-PC305, ROM-PC306, ROM-PC307, ROM-PC308, ROM-PC309, ROM-PC310, ROM-PC311, ROM-PC312, ROM-PC313, ROM-PC314, ROM-PC315, ROM-PC316, ROM-PC317, ROM-PC318, ROM-PC319, ROM-PC320, ROM-PC321, ROM-PC322, ROM-PC323, ROM-PC324, ROM-PC325, ROM-PC326, ROM-PC327, ROM-PC328, ROM-PC329, ROM-PC330, ROM-PC331, ROM-PC332, ROM-PC333, ROM-PC334, ROM-PC335, ROM-PC336, ROM-PC337, ROM-PC338, ROM-PC339, ROM-PC340, ROM-PC341, ROM-PC342, ROM-PC343, ROM-PC344, ROM-PC345, ROM-PC346, ROM-PC347, ROM-PC348, ROM-PC349, ROM-PC350, ROM-PC351, ROM-PC352, ROM-PC353, ROM-PC354, ROM-PC355, ROM-PC356, ROM-PC357, ROM-PC358, ROM-PC359, ROM-PC360, ROM-PC361, ROM-PC362, ROM-PC363, ROM-PC364, ROM-PC365, ROM-PC366, ROM-PC367, ROM-PC368, ROM-PC369, ROM-PC370, ROM-PC371, ROM-PC372, ROM-PC373, ROM-PC374, ROM-PC375, ROM-PC376, ROM-PC377, ROM-PC378, ROM-PC379, ROM-PC380, ROM-PC381, ROM-PC382, ROM-PC383, ROM-PC384, ROM-PC385, ROM-PC386, ROM-PC387, ROM-PC388, ROM-PC389, ROM-PC390, ROM-PC391, ROM-PC392, ROM-PC393, ROM-PC394, ROM-PC395, ROM-PC396, ROM-PC397, ROM-PC398, ROM-PC399, ROM-PC400, ROM-PC401, ROM-PC402, ROM-PC403, ROM-PC404, ROM-PC405, ROM-PC406, ROM-PC407, ROM-PC408, ROM-PC409, ROM-PC410, ROM-PC411, ROM-PC412, ROM-PC413, ROM-PC414, ROM-PC415, ROM-PC416, ROM-PC417, ROM-PC418, ROM-PC419, ROM-PC420, ROM-PC421, ROM-PC422, ROM-PC423, ROM-PC424, ROM-PC425, ROM-PC426, ROM-PC427, ROM-PC428, ROM-PC429, ROM-PC430, ROM-PC431, ROM-PC432, ROM-PC433, ROM-PC434, ROM-PC435, ROM-PC436, ROM-PC437, ROM-PC438, ROM-PC439, ROM-PC440, ROM-PC441, ROM-PC442, ROM-PC443, ROM-PC444, ROM-PC445, ROM-PC446, ROM-PC447, ROM-PC448, ROM-PC449, ROM-PC450, ROM-PC451, ROM-PC452, ROM-PC453, ROM-PC454, ROM-PC455, ROM-PC456, ROM-PC457, ROM-PC458, ROM-PC459, ROM-PC460, ROM-PC461, ROM-PC462, ROM-PC463, ROM-PC464, ROM-PC465, ROM-PC466, ROM-PC467, ROM-PC468, ROM-PC469, ROM-PC470, ROM-PC471, ROM-PC472, ROM-PC473, ROM-PC474, ROM-PC475, ROM-PC476, ROM-PC477, ROM-PC478, ROM-PC479, ROM-PC480, ROM-PC481, ROM-PC482, ROM-PC483, ROM-PC484, ROM-PC485, ROM-PC486, ROM-PC487, ROM-PC488, ROM-PC489, ROM-PC490, ROM-PC491, ROM-PC492, ROM-PC493, ROM-PC494, ROM-PC495, ROM-PC496, ROM-PC497, ROM-PC498, ROM-PC499, ROM-PC500, ROM-PC501, ROM-PC502, ROM-PC503, ROM-PC504, ROM-PC505, ROM-PC506, ROM-PC507, ROM-PC508, ROM-PC509, ROM-PC510, ROM-PC511, ROM-PC512, ROM-PC513, ROM-PC514, ROM-PC515, ROM-PC516, ROM-PC517, ROM-PC518, ROM-PC519, ROM-PC520, ROM-PC521, ROM-PC522, ROM-PC523, ROM-PC524, ROM-PC525, ROM-PC526, ROM-PC527, ROM-PC528, ROM-PC529, ROM-PC530, ROM-PC531, ROM-PC532, ROM-PC533, ROM-PC534, ROM-PC535, ROM-PC536, ROM-PC537, ROM-PC538, ROM-PC539, ROM-PC540, ROM-PC541, ROM-PC542, ROM-PC543, ROM-PC544, ROM-PC545, ROM-PC546, ROM-PC547, ROM-PC548, ROM-PC549, ROM-PC550, ROM-PC551, ROM-PC552, ROM-PC553, ROM-PC554, ROM-PC555, ROM-PC556, ROM-PC557, ROM-PC558, ROM-PC559, ROM-PC560, ROM-PC561, ROM-PC562, ROM-PC563, ROM-PC564, ROM-PC565, ROM-PC566, ROM-PC567, ROM-PC568, ROM-PC569, ROM-PC570, ROM-PC571, ROM-PC572, ROM-PC573, ROM-PC574, ROM-PC575, ROM-PC576, ROM-PC577, ROM-PC578, ROM-PC579, ROM-PC580, ROM-PC581, ROM-PC582, ROM-PC583, ROM-PC584, ROM-PC585, ROM-PC586, ROM-PC587, ROM-PC588, ROM-PC589, ROM-PC590, ROM-PC591, ROM-PC592, ROM-PC593, ROM-PC594, ROM-PC59

CERTIFICATE OF CONFORMITY	 CERTIFICATE of Conformity ISSUED BY: Institution of Testhouse Division	
	Reference No.: UL13749-1038128	
	When tested as specified, the submitted sample conforms with the requirements of Commission Decision of 21. July 2011 amending (Directive 2011/65/EU).	
	Applicant: Address: Trade Mark: Product: Version:	Shenzhen Rockwell Technology Development Co., Ltd. 3F No. 44 West Longgang Road, Longgang New District, Shenzhen, China Rockwell Shells (PBT) NEW MOPOL, FLOW MOPOL, FLOW MOPOL, FLOW MOPOL, FLOW MOPOL, FLOW MOPOL, FLOW MOPOL, FLOW MOPOL
The test report is issued by the Company subject to the General Conditions of Service annexed herewith. Subject to the limitations of liability, manufacturer and/or importer shall remain solely liable. The results shown in this test report refer only to the sample(s) tested under the above-mentioned version. This Test Report cannot be reproduced without in full, without prior written permission of the Company.		
Other statement (describe how to be obtained):		
RoHS <div style="display: flex; justify-content: space-around; align-items: center;">  <div style="text-align: right;">  April 16, 2012 </div> </div>		
Shenzhen UL13 Compliance Testing Laboratory, Ltd. 12, Guangyuan Industrial Park, Tanggou Road, Longgang New District, Shenzhen, Guangdong, China Tel: 0086755 83294100 http://www.ul13.com.cn Fax: 0086755 83294101 E-mail: enquiry@ul13.com.cn		

company and factory



Richmor

OEM & ODM Service

Brasil World Cup Supplier



Exhibition:

Richmor

CPSE2012 in Shenzhen



CPSE2013

10.29-10.31

4 Booth we have

Welcome you !!!



CPSE2012-- Guangdong TV Report-Shenzhen Richmor



Best Regards
Amily Zhang

HAND US YOUR TRUST, OFFER YOU OUR BEST!!!

Shenzhen Richmor Technology Development Co.,LTD

Email: overseasales-2@rcmcctv.com

Skype: rcmcctvsales2

QQ: 2355778097

MB/Whatsapp: +86 18929314790

Website: <http://www.richmor.net/>

ADD: 6th Floor, F Building, Xinzhi Industrial Park, Yangmei,Bantian,Longgang, Shenzhen

