

XXXXXXXXXXXXXXXXXXXX

RCM-SP5800

XXXX

1 XXXX DVR

2 WIFI 3G GPS

3 XXX

4 SD

5 SD

6 XXXXXXXXXXX

XXX





□□□□

□□	□□□□	□□□□
□□	□□□□	Linux□
	□□□□□	□□□□□□□ □□□□□□□□□□&NBSP;&NBSP;&NBSP;□□□□□&NBSP;&NBSP;GPS / 3G□□□□□□
	□□□□□□	□□□□□□□ □□□□□□□
	□□□□	□□□□□□
□□	□□□□	□□□□□□□□□□ 70°□CMOS□□□□□□□□
	OSD	□□□□□□□;□□□□□□ID□ GPS□
	□□	H.264□□□□□ □□□□□□□□□□
	□□□□□□	VGA□□□□□□□□□□QVGA □□
	□□□□□□□□□□QVGA	QVGA□400Kbps□□□□1.5Mbps□□4 □□□□□□□□□□
	□□□□□□□□□□VGA	VGA□1000kbps□2Mbps□□4 □□□□□□□□□□
	□□□□□	□□□□□□□□ □□
	□□□□	□□

铃声	铃声	内置MIC
	铃声	铃声铃声GT; 1W
	铃声	G.726
存储	存储	Micro-SD存储1G 32G
	存储/格式	ASF存储格式 FAT32存储
	存储	存储 存储
	存储	存储存储 存储
	存储	存储存储 存储2 4 8 16存储存储 存储
USB 接口	USB 接口	存储存储U 接口
网络	网络	支持3G 网络WCDMA CDMA2000 TD-SCDMA 网络; 支持 GPRS EDGE;
网络	网络	存储存储 网络
屏幕	屏幕	2.4英寸
	屏幕	TFT
	屏幕	480 * 234
接口	存储	支持Micro-SD 接口
温度	温度	-20°C + 50°C
	温度	20 80
尺寸	尺寸	50 90 28 mm
	尺寸	70 110 28 mm
重量	重量	重量95 重量307.5
	重量	重量238 重量352

存储CMS存储存储

Vehicle with device for test in AC Coach
 Lahore to Sadiq Abad near motorway @ 86Km/h





□□ Windows PC □□□□□□

□□ IOS □ Android □ □ □ □ □ □ □ □ □ □



□□□□□□□□□□□□

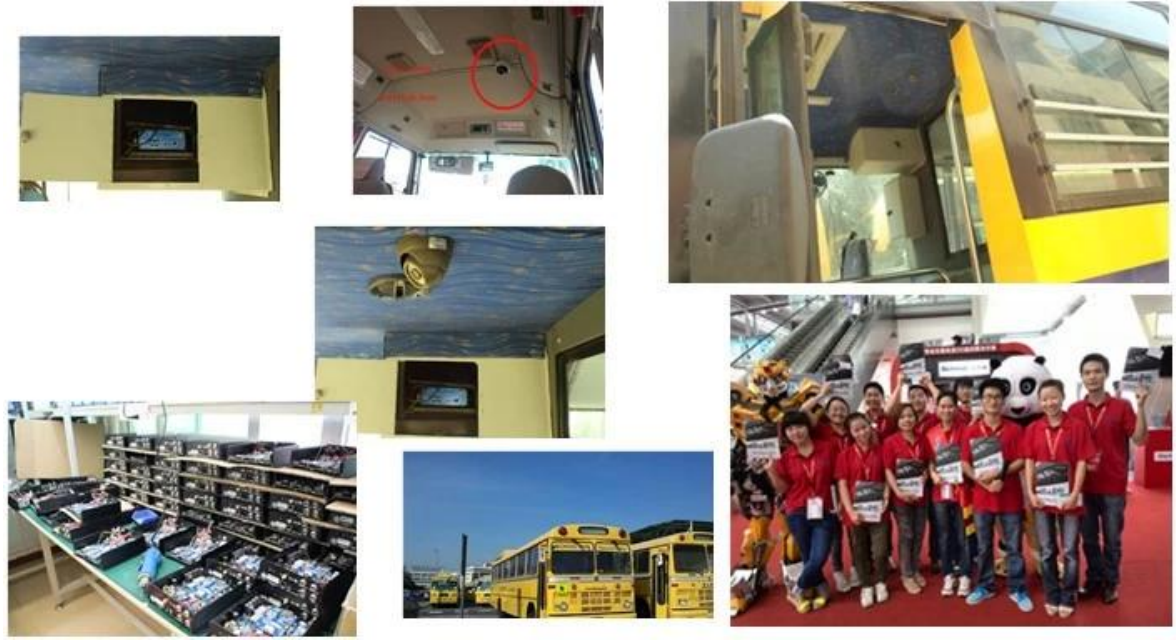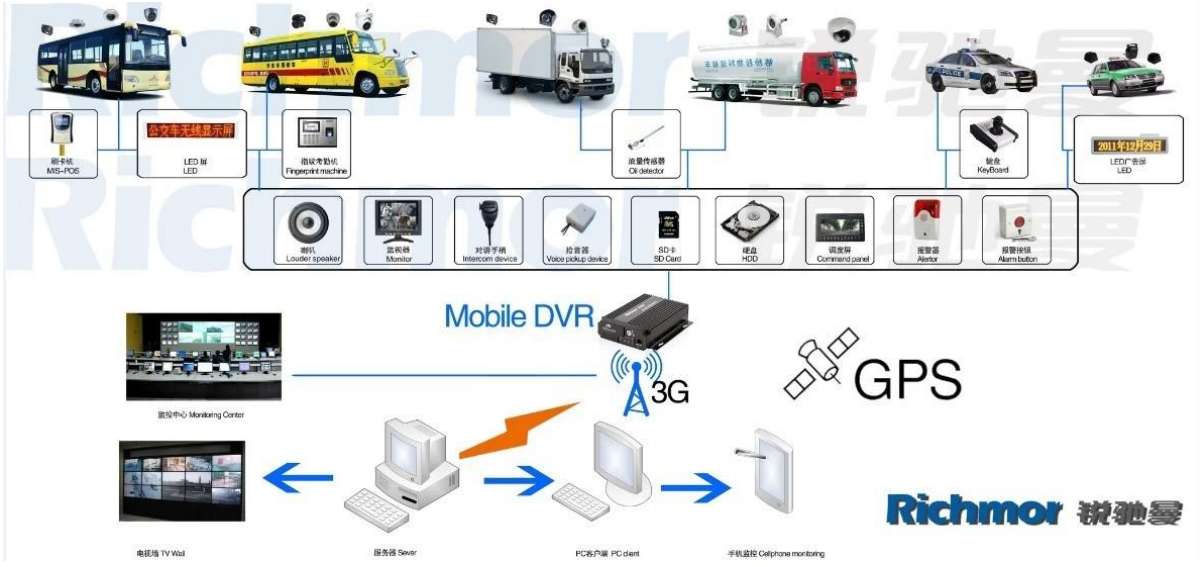



SD Mobile DVR with 3G GPS



SD Mobile DVR with WIFI 3G GPS G-Sensor



□□□□ T / T□□□□□□□□□□□□□□

□□□□ □□□□□□□□□□□□ □

□□□ 12□□

□□□□ DHL□UPS□FEDEX□EMS□TNT□□

□□□□□



Richmor Brand Package



Standard Package

□□□□□

1□□□□□□□□□□□□□□□□□□□□

2□□□ □□□□□□□□□□□□□□□□

3□□□ □□□□

4□□□□□□□□□□□□□□□□□□□□

5□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□

□□□□□



Richmor

OEM & ODM Service

Brasil World Cup Supplier



Inner Training after study from Alibaba in July



Technical Training For Fast Response to Customer Richmor 锐驰曼



lecturer for Execution