RICHMOR PRODUCTS FEATURES

1. Power failure protection.

2. Wide voltage.
3. OTA function support. (Upgrating DVR software automatically, better after-sales service for you, ONLY WE CAN ACHIEVE IT IN CHINA FOR NOW.)
4. A SMS can get DVR situation feedback from DVR.(ONLY WE CAN ACHIEVE IT IN CHINA FOR NOW.)
5. Industrial level design. (More professional and better quality.)
6. Modular design. (To prevent a module error while affecting the entire product.)
7. Encrypt video format. (To prevent data loss)
8. Current and voltage over protection.
9. Wide working temperature. (-25℃- +75℃).
10. Data redundancy technology. (To prevent data loss)
11. Excellent vibration protection.

Richmor

Factory Audit

SMS Device configure

OTA Remote Updating

AHD 720P/960P

Motion Detection

NEW

RCM-MDR210 Parameter Sheet

Item		Parameter
OS		Linux
Language		Chinese/English/Customized
Video Compression		H.264
OSD		Overlays information such as date time and vehicle ID
GUI	Graphical User Interface	Setup system parameters with the remote control.
Video Record System	Video Input	4CH 720P AHD input,aviation connector, 1.0Vp-p, 75Ω
	Video Output	1 CVBS, 1.0Vp-p, 75Ω,Aviation,Support 1CH Full Screen,4CH Screen
	Preview	Support 1 channel and 4 channels preview.,Support Manual/Alarm Trigger full screen preview
	Resolution	720P/D1/HD1/CIF, MAX:4 channels of 720P and 4 channels of D1
	Video Quality	1-4 levels, 1 is the highest level.
	Video Standard	PAL: 100f/s , CCIR625 line,50field; NTSC: 120f/s, CCIR525 line,60field; CIF: 256Kbps ~ 1.5Mbps, 8 level video quality optional; HD1: 600Kbps ~ 2.5Mbps, 8 level video quality optional; D1: 800Kbps ~ 3Mbps, 8 level video quality optional; 720P: 4Mbps-6Mbps, multi level video quality optional
	Record Mode	The default setting is auto recording after power on. Timed recording, alarm trigger recording and manual recording are supported.
Audio	Audio Input	4CH ,Aviation Plug
	Audio Output	1CH,Aviation Plug
	Compression	G.726 compression, 8KB/s speed
Alarm Input		3Ch Alarm Input, kinds of alarm linkage support
Alarm Output		1CH Alarm Output
Position		Support Built GPS/BD Module
G-Sensor		Support G-sensor
Storage	SD	Dual SD Card,each max 128GB SD Card loop recording
	Upgrade	Support SD Card updating
	File Format	.H264
	File System	Special FAT32 File System

Video Playback	Video Search	Search By Record Time/Record Type etc
	Playback	Max support 4CH Replay /Stop/Fast/Slow at same time
		Support forward and backward play at the speed of: x 2,x4,x8,x16.
Voltage & Power	Power Management	Wide Voltage.Support Timed/Delay off
	Voltage Input	DC:+10V ~ +36V
	Voltage Output	+12V~2.5A,+5V~2.5A
	Power Consumption	Normal Working <5W
Working Environment	Temperature	-20°C to +70°C
	Humidity	20% to 80%
Security	Password	User/Admin 2 Level Different Password
others	Size	112(W) x36(H) x138(D) mm
	Net Weight	360g

Player software interface

Application

Widely used in passenger car,bus,taxi,school bus,lorry,dangerous vehicle, personal car and s hip etc.

监看车前、上客门
及司机
监看车内
整体情况

SCHOOL BUS
SCHOOL BUS
EMERGENCY EXIT

TRB

Buying Guides

Packaging

1 unit with all standard accessories such as AV Cables/IO Cable/Power Cable/Key etc

Neutral paper box or Color paper box with Logo Richmor printed,also welcome customized package.

Richmor Brand Package

Standard Package

Shipping

Strong cooperated with DHL/UPS Etc for fast and safety delivery.

a. 2-5 days after payment cleared for sample order.

b. 5-10 days after payment cleared depends on order quantity for bulk order.

Payment

Service

1.Well Trained Sales team and engineers for fast and professional supoprt

2.OEM/ODM Service

Certifications

Exhibition

Richmor

CPSE2012 in Shenzhen

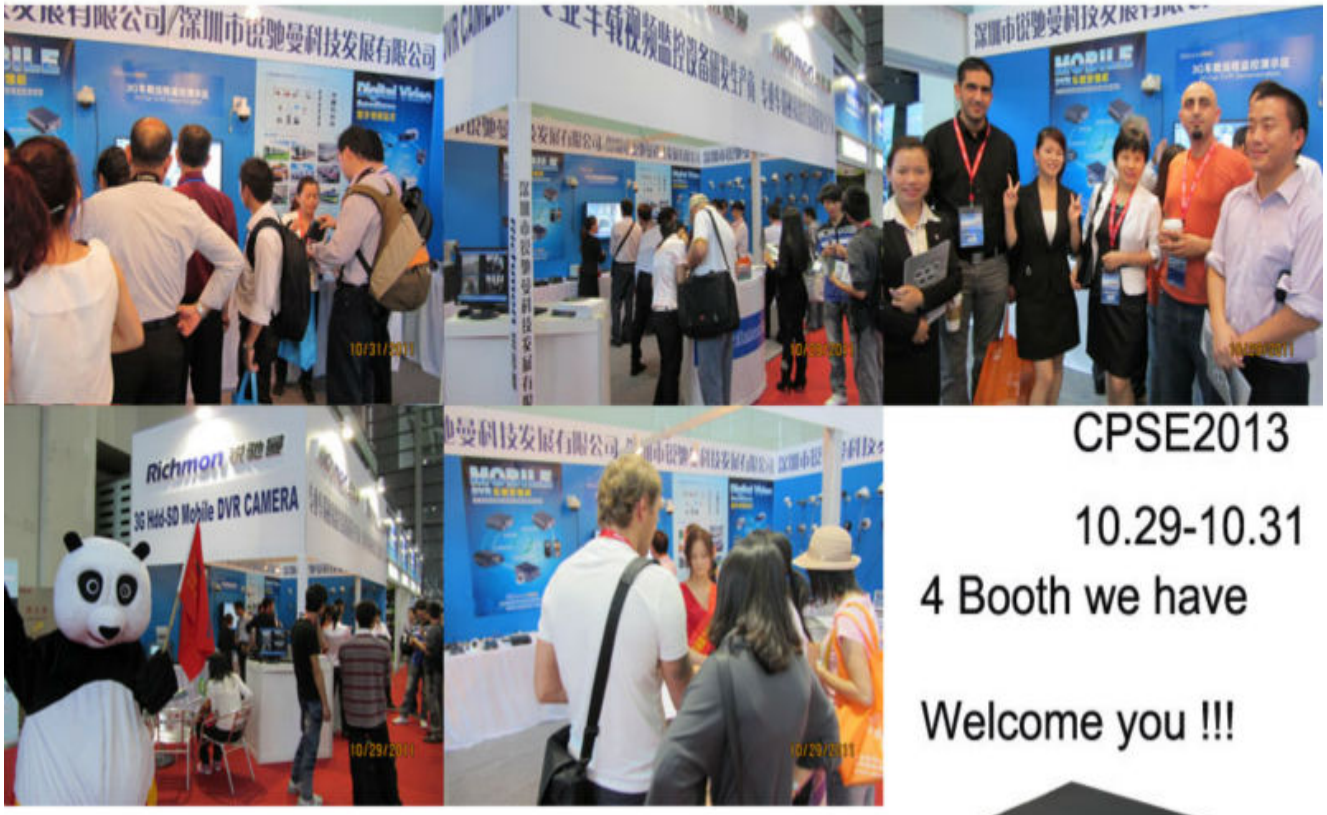

CPSE2013

10.29-10.31

4 Booth we have

Welcome you !!!

CPSE2012-- Guangdong TV Report-Shenzhen Richmor

About us&Customers:

Inner Tranning after study from Alibaba in July

Technical Tranning For Fast Response to Customer Richmor 锐驰曼

lecturer for Execution

Skype: rcmcctvsales5