


# spécification de produit:

## Parameter Sheet

| Item                    |                          | Parameter   |
|-------------------------|--------------------------|---|
| OS                      |                          | Linux   |
| Language                |                          | Chinese/English/Customized  |
| Video Compression       |                          | H.264   |
| OSD                     |                          | Overlays information such as date time and vehicle ID   |
| GUI                     | Graphical User Interface | Setup system parameters with the remote control.  |
| Video Record System     | Video Input              | 4CH 720P AHD input/SD input/mixed video input,aviation connector, 1.0Vp-p, 75Ω  |
|                         | Video Output             | 1CH CVBS+1CH VGA output, 1.0Vp-p, 75Ω,Aviation,Support 1CH Full Screen,4CH Screen   |
|                         | Preview                  | Support 1 channel and 4 channels preview.,Support Manual/Alarm Trigger full screen preview  |
|                         | Resolution               | 720P/D1/HD1/CIF, MAX:4 channels 720P  |
|                         | Video Quality            | 0-7 levels, 0 is the highest level.   |
|                         | Video Standard           | PAL: 100f/s , CCIR625 line,50field;<br>NTSC: 120f/s, CCIR525 line,60field;<br>CIF: 256Kbps ~ 1.5Mbps, 8 level video quality optional;<br>HD1: 600Kbps ~ 2.5Mbps, 8 level video quality optional;<br>D1: 800Kbps ~ 3Mbps, 8 level video quality optional;<br>720P: 4Mbps-6Mbps, multi level video quality optional |
|                         | Record Mode              | The default setting is auto recording after power on. Timed recording, alarm trigger recording and manual recording are supported.  |
| Audio                   | Audio Input              | 4CH ,Aviation Plug  |
|                         | Audio Output             | 1CH,Aviation Plug   |
|                         | Compression              | G.726 compression, 8KB/s speed  |
| Alarm Input             |                          | 4Ch Alarm Input, kinds of alarm linkage support   |
| Alarm Output            |                          | 1CH Alarm Output  |
| Communication interface |                          | 1CH RS232 or 1CH RS485 for optional   |
| Position                |                          | Support Built GPS/BD Module, built in G-sensor, can repaly and analyse vehicle driven route.  |
| wireless transmission   |                          | Support Built-in 3G/4G wireless transmission function, WCDMA, CDMA2000, TDD-LTE, FDD-LTE....  |
| <b>Motion Detection</b> |                          | <b>Support motion detection alarm. (Can set the video recording duration time after alarm on platform.)</b>   |
| G-Sensor                |                          | Support G-sensor  |
| Storage                 | SD                       | Dual SD Card,each max 128GB SD Card loop recording  |
|                         | Upgrade                  | Support SD Card remote updating   |


|                     |                   |  |
|---------------------|-------------------|--|
|                     | File Format       | .264   |
|                     | File System       | Special FAT32 File System  |
| Video Playback      | Video Search      | Search By Record Time/Record Type etc  |
|                     | Playback          | Max support 4CH Replay /Stop/Fast/Slow at same time<br>Support forward and backward play at the speed of: x 2,x4,x8,x16. |
| Voltage & Power     | Power Management  | Wide Voltage.Support Timed/Delay off   |
|                     | Voltage Input     | DC:+8V ~ +36V  |
|                     | Voltage Output    | +12V@2.5A, +5V@2.5A  |
|                     | Power Consumption | Normal Working < 14W , Stand-by status < 0.5W  |
| Working Environment | Temperature       | -20℃ to +70℃   |
|                     | Humidity          | 20% to 80%   |
| Security            | Password          | User/Admin 2 Level Different Password  |
| others              | Size              | 112(W) x36(H) x138(D) mm   |
|                     | Net Weight        | 360g   |

Produit spectacle:

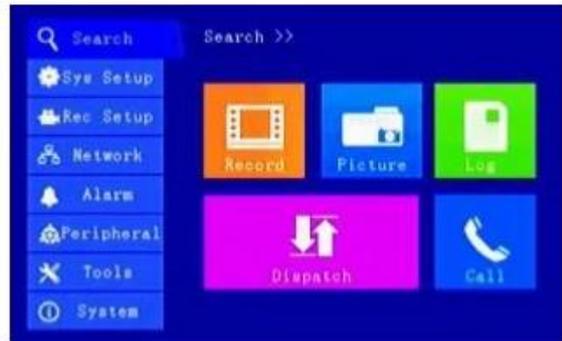


# Product Introduction

## Device Series

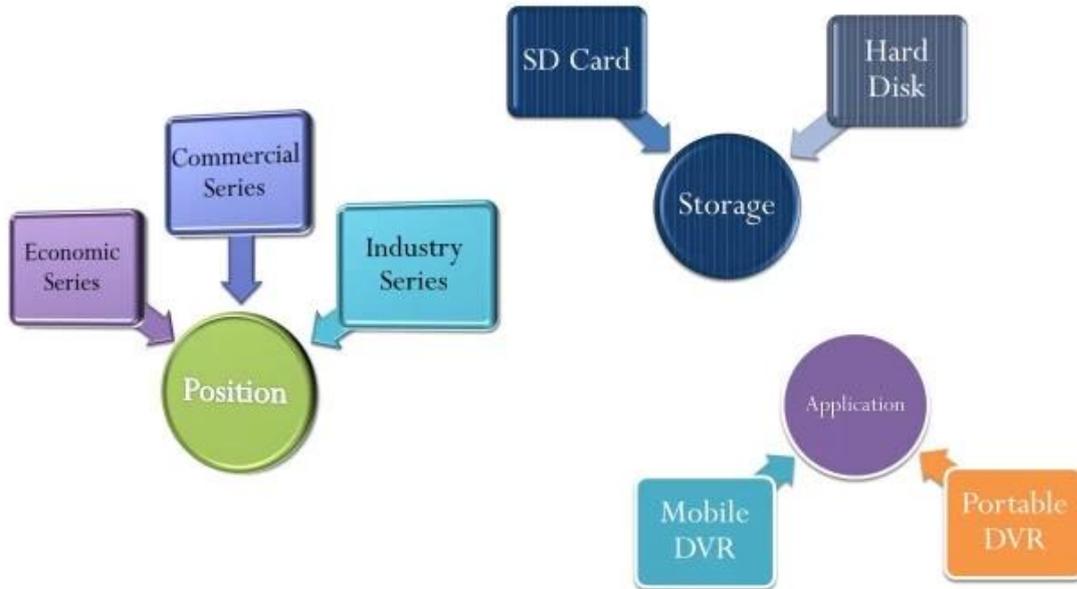

# Product Advantage

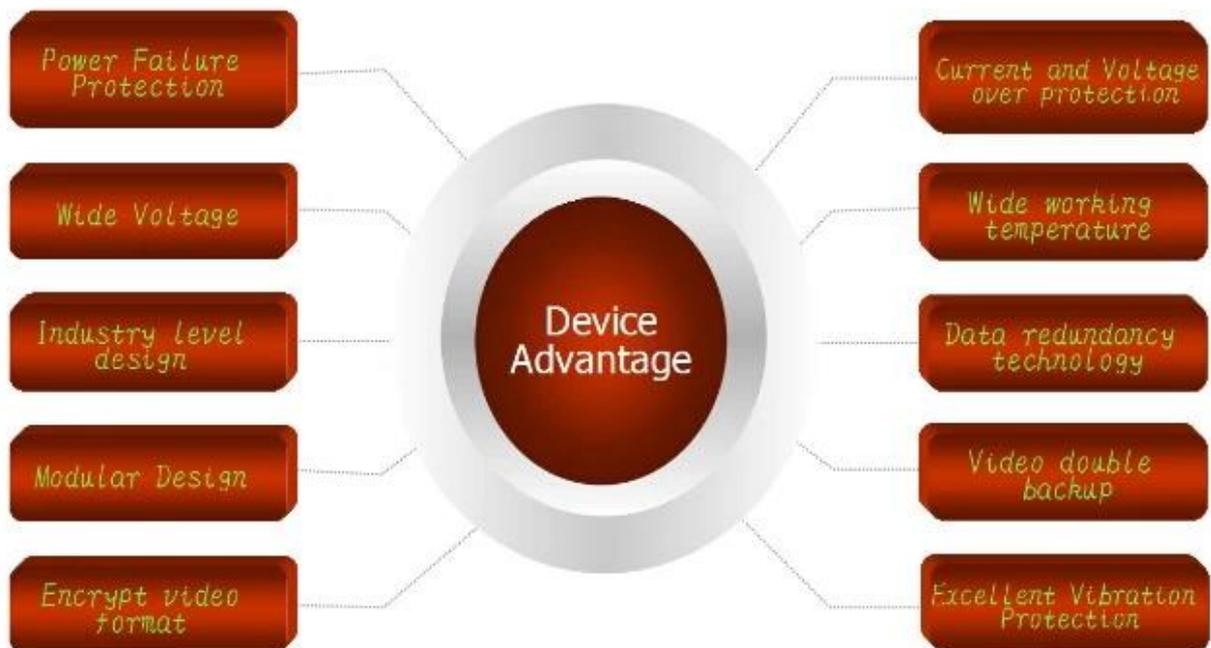

# Interface graphique du client utilisateur

**移动视频监控平台**

欢迎登录,RCMTEST    系统    实时预览    电子地图    回放管理    信息管理    系统设置

终端列表    轮询列表    我的地图

监控中心(3/11)

- 贵州(1/1)
  - 贵C A6446
    - CH1
    - CH2
    - CH3
    - CH4
  - 桂KY7507
  - 桂KY7569
  - 80024
  - 80119
  - D82868
  - 于NPS001
  - 桂KY7586
  - 桂KY7599
  - 贵B93017
  - 贵C87762

状态    云台    色彩    语音

|       |                     |
|-------|---------------------|
| 设备类型  | MDVR                |
| 终端名称  | 贵C A6446            |
| 终端ID  | 80109               |
| 公司    | 通运集团金融公司            |
| 所属分组  | 贵州                  |
| 状态    | 在线                  |
| GPS时间 | 2016-03-14 09:50:09 |
| 位置    | 贵州省遵义市习水县G4215(     |
| 速度    | 74.10 km/h(南)       |
| 费用    | 正常                  |

1 贵C A6446 - CH1 - 0 KB/S



2 贵C A6446 - CH2 - 24 KB/S



3 贵C A6446 - CH3 - 0 KB/S



4 贵C A6446 - CH4 - 0 KB/S



地址: 马临镇政府

贵C A6446  
时间: 2016-03-14 09:50:09    速度: 74.10  
公司: 通运集团金融公司    司机: 陈国忠  
13511881529  
位置: 贵州省遵义市习水县G4215(带道高  
状态: 在线, 3G, ACC开启, SD卡(存在), 附  
视频 对讲 监听 抓拍 更多

贵C A6446



1 / 2 / 3 / 4

监控: 4    在线: 3    离线: 1    报警: 0    停车未熄火: 0    停车熄火: 0    定位无效: 0

| 终端       | GPS时间               | 位置                     | 速度             | 报警 |
|----------|---------------------|------------------------|----------------|----|
| 贵C A6446 | 2016-03-14 09:50:09 | 贵州省遵义市习水县G4215(带道高速公路) | 74.10 km/h(南)  |    |
| 桂KY7507  | 2016-03-14 09:50:17 | 广西壮族自治区玉林市博白县人民中路38号   | 11.00 km/h(北)  |    |
| 桂KY7569  | 2016-03-14 09:50:38 | 广西壮族自治区玉林市博白县X403      | 27.00 km/h(西北) |    |
| 桂KY7599  | 2016-03-14 09:49:03 | 广西壮族自治区玉林市博白县S216      | 0.00 km/h(东)   |    |

运行时长: 09:01:04    在线数: 3 / 定损数: 1 / 欠费: 0 / 总数: 11    在线率: 27.27% / 定损率: 9.09%

Appliation

## FUNCTIONS

- Video & Audio real-time monitoring
- Online Vehicle Status
- Satellite Map
- GPS
- Video Storage
- Tracking Display
- Intercom
- Fuel Sensor
- G-Sensor
- Temperature-Sensor

**Richmor**

OEM & ODM Service

Brasil World Cup Supplier  
[www.rcmctv.com](http://www.rcmctv.com)



Truck  
Coach



School Bus  
Bus




Police Car  
Taxi



Support  
All Vehicles

certificat




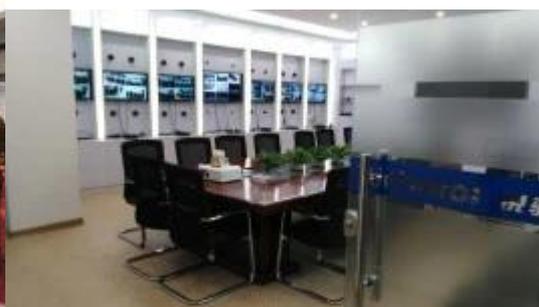

Exposition:

# Richmor

## CPSE2012 in Shenzhen

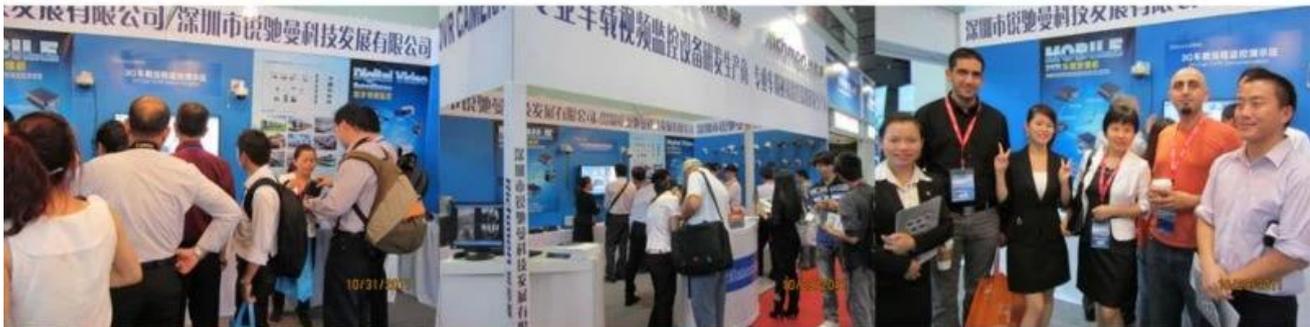

### CPSE2013

10.29-10.31

4 Booth we have

Welcome you !!!



## CPSE2012-- Guangdong TV Report-Shenzhen Richmor



Bienvenue à contacter **Susie** pour plus de détails

Par email / wechat, Wechat: Jobs2lovers

Par Skype: rcmctvsales4

Par Trademanager: cn1001765398

Par téléphone portable / WhatsApp: + 86-181 2626 3832 (Susie Zhou)

Par QQ:2355778106