

RICHMOR PRODUCTS FEATURES

1. Power failure protection.

2. Wide voltage.

3. OTA function support. (Upgrading DVR software automatically, better after-sales service for you, ONLY WE CAN ACHIEVE IT IN CHINA FOR NOW.)

4. A SMS can get DVR situation feedback from DVR.(ONLY WE CAN ACHIEVE IT IN CHINA FOR NOW.)

5. Industrial level design. (More professional and better quality.)

6. Modular design. (To prevent a module error while affecting the entire product.)

7. Encrypt video format. (To prevent data loss)

8. Current and voltage over protection.

9. Wide working temperature. (-25°C- +75°C).

10. Data redundancy technology. (To prevent data loss)

11. Excellent vibration protection.



SMS Device configure
OTA Remote Updating
AHD 720P/960P
Motion Detection

Richmor





RCM-MDR210 Parameter Sheet

Item	Parameter
OS	Linux
Language	Chinese/English/Customized
Video Compression	H.264
OSD	Overlays information such as date time and vehicle ID
GUI	Graphical User Interface Setup system parameters with the remote control.
Video Record System	4CH 720P AHD input,aviation connector, 1.0Vp-p, 75Ω
Video Output	1 CVBS, 1.0Vp-p, 75Ω,Aviation,Support 1CH Full Screen,4CH Screen
Preview	Support 1 channel and 4 channels preview.,Support Manual/Alarm Trigger full screen preview
Resolution	720P/D1/HD1/CIF, MAX:4 channels of 720P and 4 channels of D1
Video Quality	1-4 levels, 1 is the highest level.
Video Standard	PAL: 100f/s , CCIR625 line,50field; NTSC: 120f/s, CCIR525 line,60field; CIF: 256Kbps ~ 1.5Mbps, 8 level video quality optional; HD1: 600Kbps ~ 2.5Mbps, 8 level video quality optional; D1: 800Kbps ~ 3Mbps, 8 level video quality optional; 720P: 4Mbps-6Mbps, multi level video quality optional
Audio	Record Mode The default setting is auto recording after power on. Timed recording, alarm trigger recording and manual recording are supported.
Audio Input	4CH ,Aviation Plug
Audio Output	1CH,Aviation Plug
Compression	G.726 compression, 8KB/s speed
Alarm Input	3Ch Alarm Input, kinds of alarm linkage support
Alarm Output	1CH Alarm Output
Position	Support Built GPS/BD Module
G-Sensor	Support G-sensor
Storage	SD Dual SD Card,each max 128GB SD Card loop recording
Upgrade	Support SD Card updating
File Format	.H264
File System	Special FAT32 File System

Video Playback	Video Search Playback	Search By Record Time/Record Type etc Max support 4CH Replay /Stop/Fast/Slow at same time Support forward and backward play at the speed of: x 2,x4,x8,x16.
Voltage & Power	Power Management Voltage Input Voltage Output Power Consumption	Wide Voltage.Support Timed/Delay off DC:+10V ~ +36V +12V~2.5A,+5V~2.5A Normal Working <5W
Working Environment	Temperature Humidity	-20°C to +70°C 20% to 80%
Security others	Password Size Net Weight	User/Admin 2 Level Different Password 112(W) x36(H) x138(D) mm 360g


Player software interface



Application

Widely used in passenger car,bus,taxi,school bus,lorry,dangerous vehicle, personal car and ship etc.



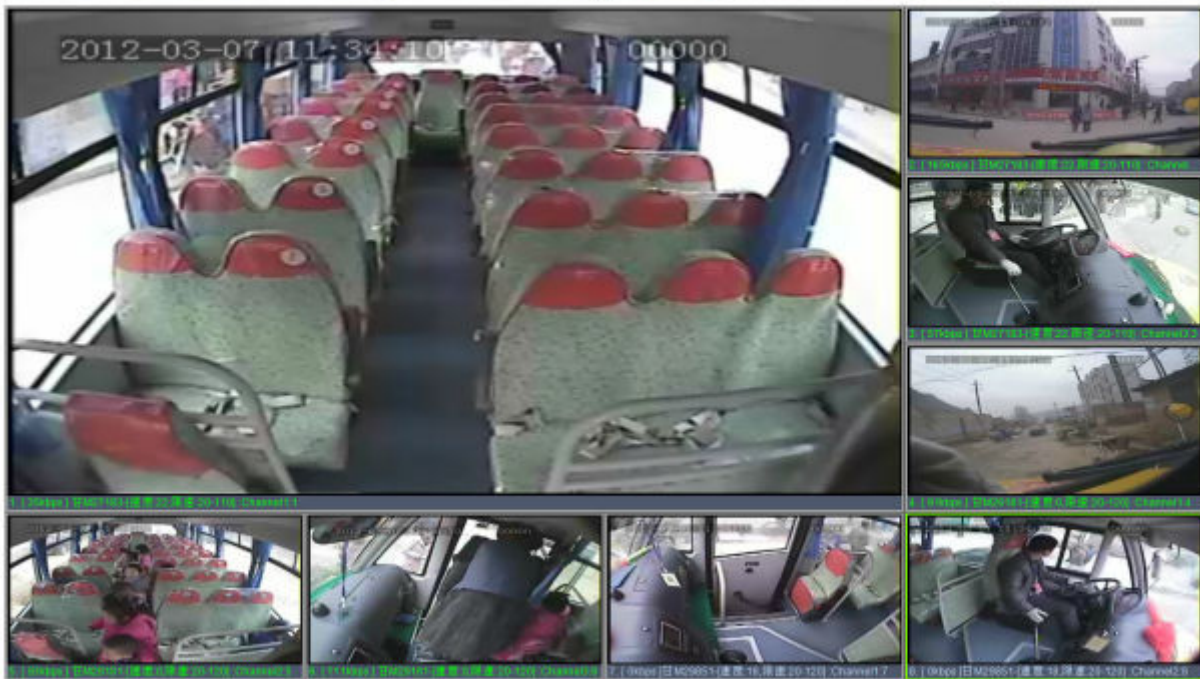

Buying Guides

Packaging

1 unit with all standard accessories such as AV Cables/IO Cable/Power Cable/Key etc

Neutral paper box or Color paper box with Logo Richmor printed,also welcome customized package.



Richmor Brand Package



Standard Package

Shipping

Strong cooperated with DHL/UPS Etc for fast and safety delivery.

- a. 2-5 days after payment cleared for sample order.
- b. 5-10 days after payment cleared depends on order quantity for bulk order.

Payment



Service

1. Well Trained Sales team and engineers for fast and professional support

2. OEM/ODM Service



CUSTOMER SATISFACTION

- Excellent Aftersale service
- 12 months warranty
- 24 hours customer service
- We understand the importance of our customers

Exhibition

CERTIFICATE OF CONFORMITY		
	CERTIFICATE of Conformity BY/ENNEC Restriction of Hazardous Substance	
	Reference No. : L301004100010	
	When tested as specified, the following sample complies with the requirements of Commission Decision of 21 July 2007 amending Directive 2002/95/EC:	
	Equipment	Electronic Machine Technology Development Co., LTD.
	Address	3F No.84 West Longgang Road, Longgang New District, Shenzhen, China
	Trade Mark	Shenzhen
	Product	Monitor Unit
	Material	PCBM-INDUSTRIAL, PCBM-MEDICAL, PCBM-MATERIAL, PCBM-MEDICAL, PCBM-INDUSTRIAL, PCBM-INDUSTRIAL, PCBM-INDUSTRIAL, PCBM-INDUSTRIAL
	The test report is issued to the Company subject to its General Conditions of Service printed hereunder. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues outlined therein. The results shown in this test report refer only to the samples tested under certain circumstances. The Test Report cannot be reproduced, except in full, without prior written permission of the Company.	
Other relevant documents may be obtained.		
  <i>John Lee</i> Manager April 18, 2013		
Shenzhen L301 Compliance Testing Laboratory, Ltd. 101, Honggang Industrial Park, Yingshi Road, Xixiang East, Baoan District, Shenzhen, Guangdong, China Tel: +86-755-83291100 http://www.l301.com.cn		
Fax: +86-755-83291102 Email: enr@l301.com.cn		

Richmor

CPSE2012 in Shenzhen



CPSE2013

10.29-10.31

4 Booth we have

Welcome you !!!



CPSE2012-- Guangdong TV Report-Shenzhen Richmor



About us&Customers:



Inner Training after study from Alibaba in July



Technical Training For Fast Response to Customer **Richmor 锐驰**



lecturer for Execution



South Africa




Argentina



Czech Republic



Brazil

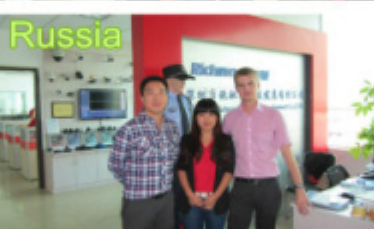

Russia



India



Turkey



Mexico



Saudi Arabia

Skype: rcmcctvsales5