Product Description

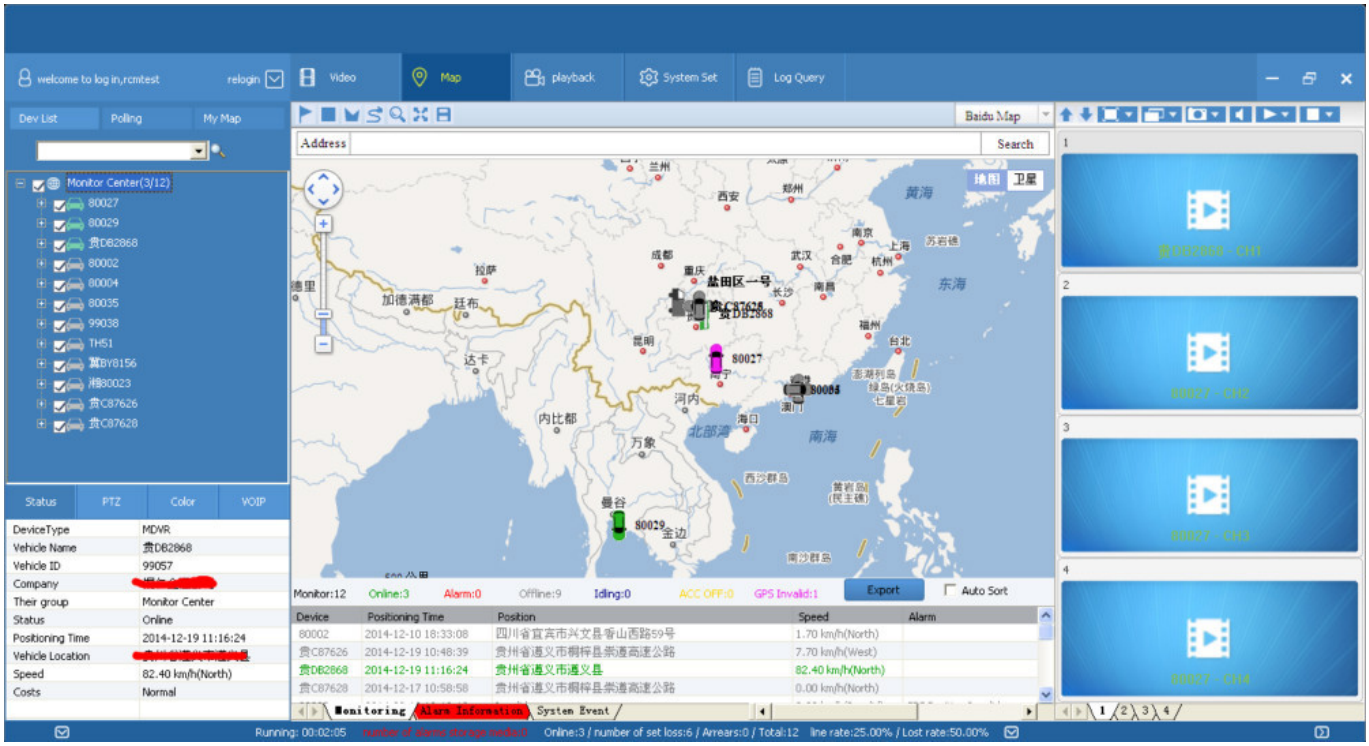
welcome to log in,rcmtest
relogin
Video
Map
playback
System Set
Log Query
Dev List
Polling
My Map
Monitor Center(3/12)
80027
80029
贵DB2868
80002
80004
80035
99038
TH51
冀BY8156
湘80023
贵C87626
贵C87628
Baidu Map
Address
Search
Status
PTZ
Color
VOIP
DeviceType MDVR
Vehicle Name 贵DB2868
Vehicle ID 99057
Company
Their group Monitor Center
Status Online
Positioning Time 2014-12-19 11:16:24
Vehicle Location
Speed 82.40 km/h(North)
Costs Normal
Monitor:12 Online:3 Alarm:0 Offline:9 Idling:0 ACC OFF:0 GPS Invalid:1
Export
Auto Sort
Device Positioning Time Position Speed Alarm
80002 2014-12-10 18:33:08 四川省宜宾市兴文县香山西路59号 1.70 km/h(North)
贵C87626 2014-12-19 10:48:39 贵州省遵义市桐梓县崇遵高速公路 7.70 km/h(West)
贵DB2868 2014-12-19 11:16:24 贵州省遵义市遵义县 82.40 km/h(North)
贵C87628 2014-12-17 10:58:58 贵州省遵义市桐梓县崇遵高速公路 0.00 km/h(North)
Monitoring
Alarm Information
System Event
Running: 00:02:05
Online:3 / number of set loss:6 / Arrears:0 / Total:12
line rate:25.00% / Lost rate:50.00%

Mobile monitoring and management platform
Welcome to log in,RCMTEST
System
Video
Map
Playback
System Set
Log Query
Extend App
Dev List
Polling
My Map
Monitor Center(6/12)
桂KY7569
CH1
CH2
CH3
CH4
桂KY7586
桂KY7599
贵DB2868
贵C 26562
贵C A6446
80119
予NPS001
桂KY7507
湘80024
1 桂KY7586 - CH1 - 10 KB/S
2 桂KY7586 - CH2 - 4 KB/S
3 桂KY7586 - CH3 - 29 KB/S
4 桂KY7586 - CH4 - 0 KB/S
Address
Search
Status
PTZ
Color
VOIP
Device type MDVR
Vehicle Name 桂KY7586
Vehicle ID 20041
Company
Their Group Monitor Center
Status Online
Positioning Time 2015-07-23 11:53:57
Location 广西壮族自治区玉林市博白县
Speed 0.00 km/h(Northeast)
Costs Normal
Monitor:2 Online:2 Alarm:0 Offline:0 Idling:0 ACC OFF:0 GPS Invalid:0
Export
Auto Sort
Device Positioning Time Position Speed Alarm
桂KY7569 2015-07-23 11:53:47 广西壮族自治区玉林市博白县兴隆中路10号 0.00 km/h(West)
桂KY7586 2015-07-23 11:53:57 广西壮族自治区玉林市博白县S216 0.00 km/h(Northeast)
Monitoring
Alarm Information
System Event
Running: 00:02:05
Online:6 / Number of set loss:4 / Arrears:0 / Total:12
Line Rate:50.00% / Lost Rate:33.33%
桂KY7586
Time:2015-07-23 11:53:57
Mileage:8.92 km
Speed:0.00 km/h(Northeast
Position:广西壮族自治区玉
Status:(Online)ACC ON,SD
SD Card2Exist,Network sig
Network:3G
桂KY7586
玉柴配套产业园
S216
200 米
© 2015 Baidu - Data © NavInfo & CenNavi & 道道通

GPS Positioning & Overspeed Alarm

GPS data including Latitude, Longitude, and speed of vehicles will be saved along with video footages on to the SD card or hard disk, while playing the footages you can also check the the locations of your vehicles on map. Besides, alerts would be triggered while driving overspeed.

2TB +128GB Large Capacity Storage

Up to 2TB hard disk & 128GB SD Card supported at the same time for saving video footages, once the disk is full, the DVR will overwrite the earlier files to make space for new files, which means you can have the DVR recording all the time to look after your vehicle.

Alarm I/O Alarm & Alarm Recording

The DVR supports 6 I/O inputs and 1 alarm output. You can set those Inputs to record vehicle bracking, turning left/ right, door openning and more. Also, they can be simply used as a Panic Button, or work with other external sensors to trigger recording or send message to the monitor center.

8 CHANNEL 4G FULL D1 2TB+128GB HDD Mobile DVR

Main Features

HIS Solution,H.264 Compression,support 8CH D1 real-time video recording ;

3CH video output (2CH CVBS video, support Front&Rear output; VGA output for optional).

Exclusive pre-
allocate File System protect data completeness,prevent SD Card fragment,ensure date stably and complet ely.

8-36V wide voltage with low power consumption.

Unique UPS Technology ensures the integrity of record when power failure occurs,even can for 8-10s.

HDD+SD Card Storage (Support 2.5” HDD, max 128G SD Card) protect from Shock & Dust damage;suppor t USB port data backup and device update;

Support 2 USB ports, data backup and device upgrade.

Support 9CH alarm input (1CH analog input + 8CH IO alarm input), 2CH independent alarm output.

Support 2CH CAN interface.

Support HDD heating functions,can work in harsh environment.

Support GPS/BD/G-Sensor Extension module;

Realize real-time monitor through 3G/4G;

Support WIFI module, can download data automatically.

Support SMS remotely configure/control device;

Support Broadcast/Intercom/Text sent etc;can add oil sensor/temperature sensor/POS/LED Advertisement P anel;

Support voice call function.

Support OTA (On-The-
Air) function, device can automatically update the new version, more convenient to maintain.

Support IOS/Android Phone Remote monitor.

Specifications

Item		Parameter
OS		Embeded Linux
System Language		English/Chinese/Customized
Video Compression		H.264 Video Compression
OSD		Overlays information such as date time and vehicle ID
GUI	Graphical User Interface	Support externally connect monitor screen. Setup system parameters with the remote control.
Video Record System	Video Input	8CH standard definition input,aviation connector, 1.0Vp-p, 75Ω
	Video Output	2 CVBS output+ VGA output(Optional) , 1.0Vp-p, 75Ω,Aviation,Support 1CH Full Screen,4CH Screen,9CH screen.
	Preview	Support 1 channel ,4 channels and 9 channels preview.,Support Manual/Alarm Trigger full screen preview
	Resolution	D1/HD1/CIF, MAX: 8 channels D1.
	Video Quality	0 -7 levels, 0 is the highest level.
	Video Standard	PAL: 100f/s , CCIR625 line,50field; NTSC: 120f/s, CCIR525 line,60field; CIF: 256Kbps ~ 1.5Mbps, 8 level video quality optional; HD1: 600Kbps ~ 2.5Mbps, 8 level video quality optional; D1: 800Kbps ~ 3Mbps, 8 level video quality optional;
	Record Mode	The default setting is auto recording after power on. Timed recording, alarm trigger recording and manual recording are supported.

Audio	Audio Input	8CH Aviation Connector
	Audio Output	2CH, headphone connect at front panel, BNC Connect on Back panel
	Audion Compression	G.726 compression format, 8kb/s
Alarm Input		7CH Alarm Input,1CH AD Input, impulse speed input,Alarm Linkage
Alarm Output		2CH alarm Output,Support Light/Sound alarm sensor,Oil/Power cut
Interface		3CH RS232, POS/Fuel Sensor/LED Advertisement Connection
		1CH 485 Interface,Connect PTZ Camera
Wireless		Support Built in 3G transmission,, WCDMA, CDMA2000,GPRS, EDGE;
		Built in 4G module optional, TDD-LTE, FDD-LTE
GPS		Support GPS
Storage	HDD	Max 2.5” 2TB HDD
	SD	Max 128GB SD Card Mirror Recording Keep Data Safety
	Updating	Support USB Updating, SD Card Updating,OTA Remote Updating
	File Format	0.264
	File System	Special FAT32 File System
	USB	USB Interface on Front Panel for data back up by U Disk,Hard Disk
Video Replay	Video Search	Search By Record Time/Record Type etc
	Playback	Max support 4CH Replay /Stop/Fast/Slow at same time
		Support forward and backward play at the speed of: x 2,x4,x8,x16
Power Consumption	Power Management	Wide Voltage.Support Timed/Delay off
	Voltage Input	DC:+6V ~ +36V
	Voltage Output	+12V-2.5A,+5V-2.5A
	Power	Working <5W
Working Environment	Temperature	-20°C to +70°C
	Humidity	20% to 80%
Security	Password	User/Admin 2 Level Different Password
Other	Size	200 (D)* 187(W)* 62(H) mm
	Net Weight	1.90 Kg
Optional Functions	Voice Call	Support voice call each other
Option	TTS Voice Broadcast	Support TTS voice broadcast function.
	Serial Expand	Support LED Advertisement Panel,Oil Sensor,POS,Bus Station Broadcaster,Car OBD,ect. external device

Our Services

PC&Phone Monitoring

CMSV6 Interface

CMSV6 In Mobile Phone Have all in the palm of your hand

Real-time monitoring via Mobile Phone

Support iPhone, Android, iPad system

Video & Audio Monitoring Online Vehicle GPS

Satellite Map Video Storage

PTZ control Tracking Display Picture Snapshot Voice intercom

FQA

Q: During playback, the map doesn't show?
A: Possible reasons are as follows;
1.Net cable did not connect to PC;
2.Net works, but the computer can not get to the Internet;
Q: When SD card and HDD records, How is the record coverage?
A: SD card and HDD will record circularly for each other. When they are full, they will delete the original video records respectively.

Q: The device was opened, HDD was installed, but the device can not record successful.
A: 1.Check the HDD/SD Card was formatted or not, the unformatted HH/SD Card can not be used. Enter into the Main Menu – System Setup – Formatting the new installed HDD/SD Card.
2. If the recording channel is closed, if set the timing recording, it can not recording when it beyond the period of timing recording.
3. If the HDD is connect well, if the HDD/SD light is on.

Richmor Brand Package

Standard Package

CAMERA Accessory

Shipping

Strong cooperated with DHL/UPS Etc for fast and safety delivery.

a. 2-5 days after payment cleared for sample order.

b. 5-10 days after payment cleared depends on order quantity for bulk order.

Exhibition

Richmor

CPSE2012 in Shenzhen

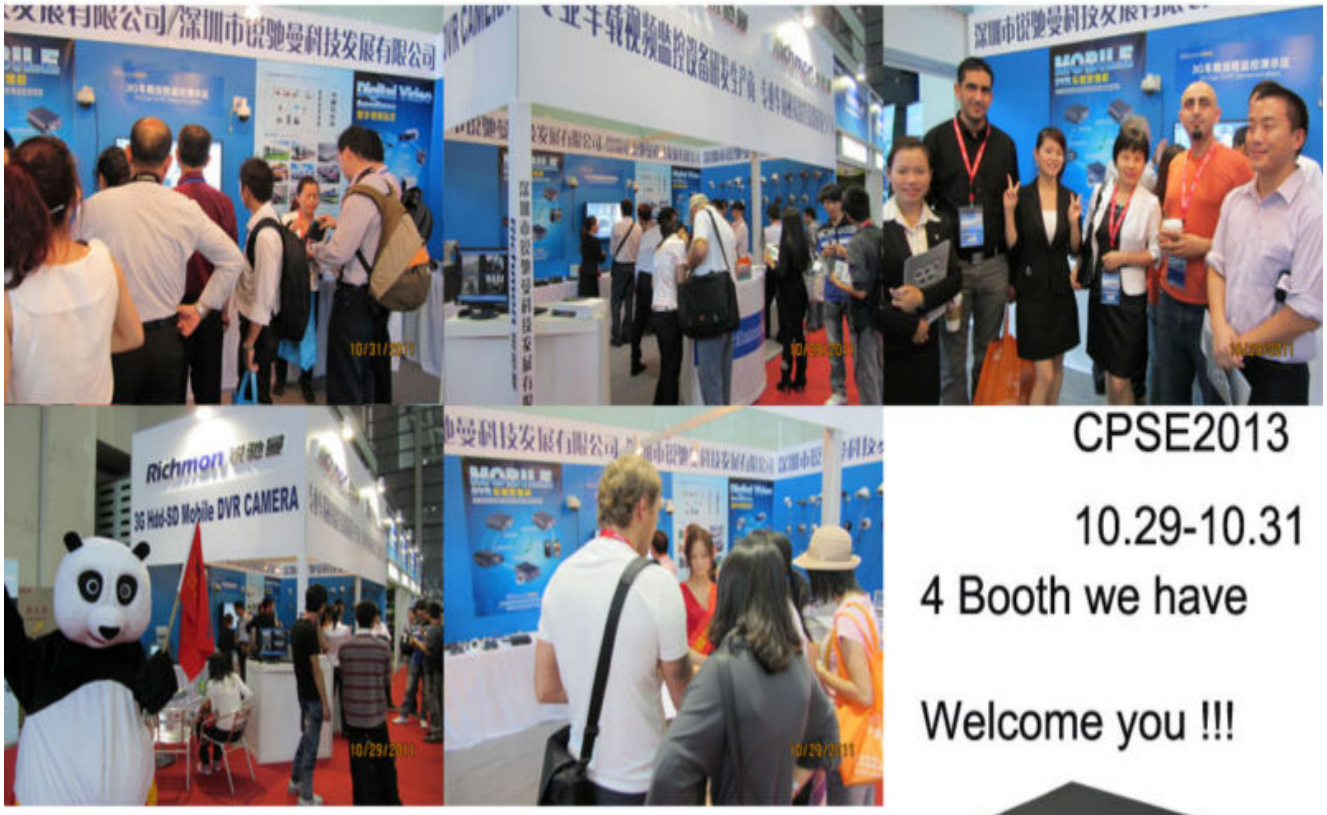

CPSE2013

10.29-10.31

4 Booth we have

Welcome you !!!

CPSE2012-- Guangdong TV Report-Shenzhen Richmor

Certifications

Skype:rcmcctvsales5