□□□□□ □3G DVR □□□□□□□ DVR □GPS WIFI □□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□□□4G□□□□□□□□□□□□□□□□USB□□□
□□□□□□□□□□□□□□□□□□□□□□

Front and side board definition

Back cover definition

Figure 4

1. **Adorn clasp**
2. **Battery Cover Buckle**
3. **Battery Cover switch**

应用案例/applications

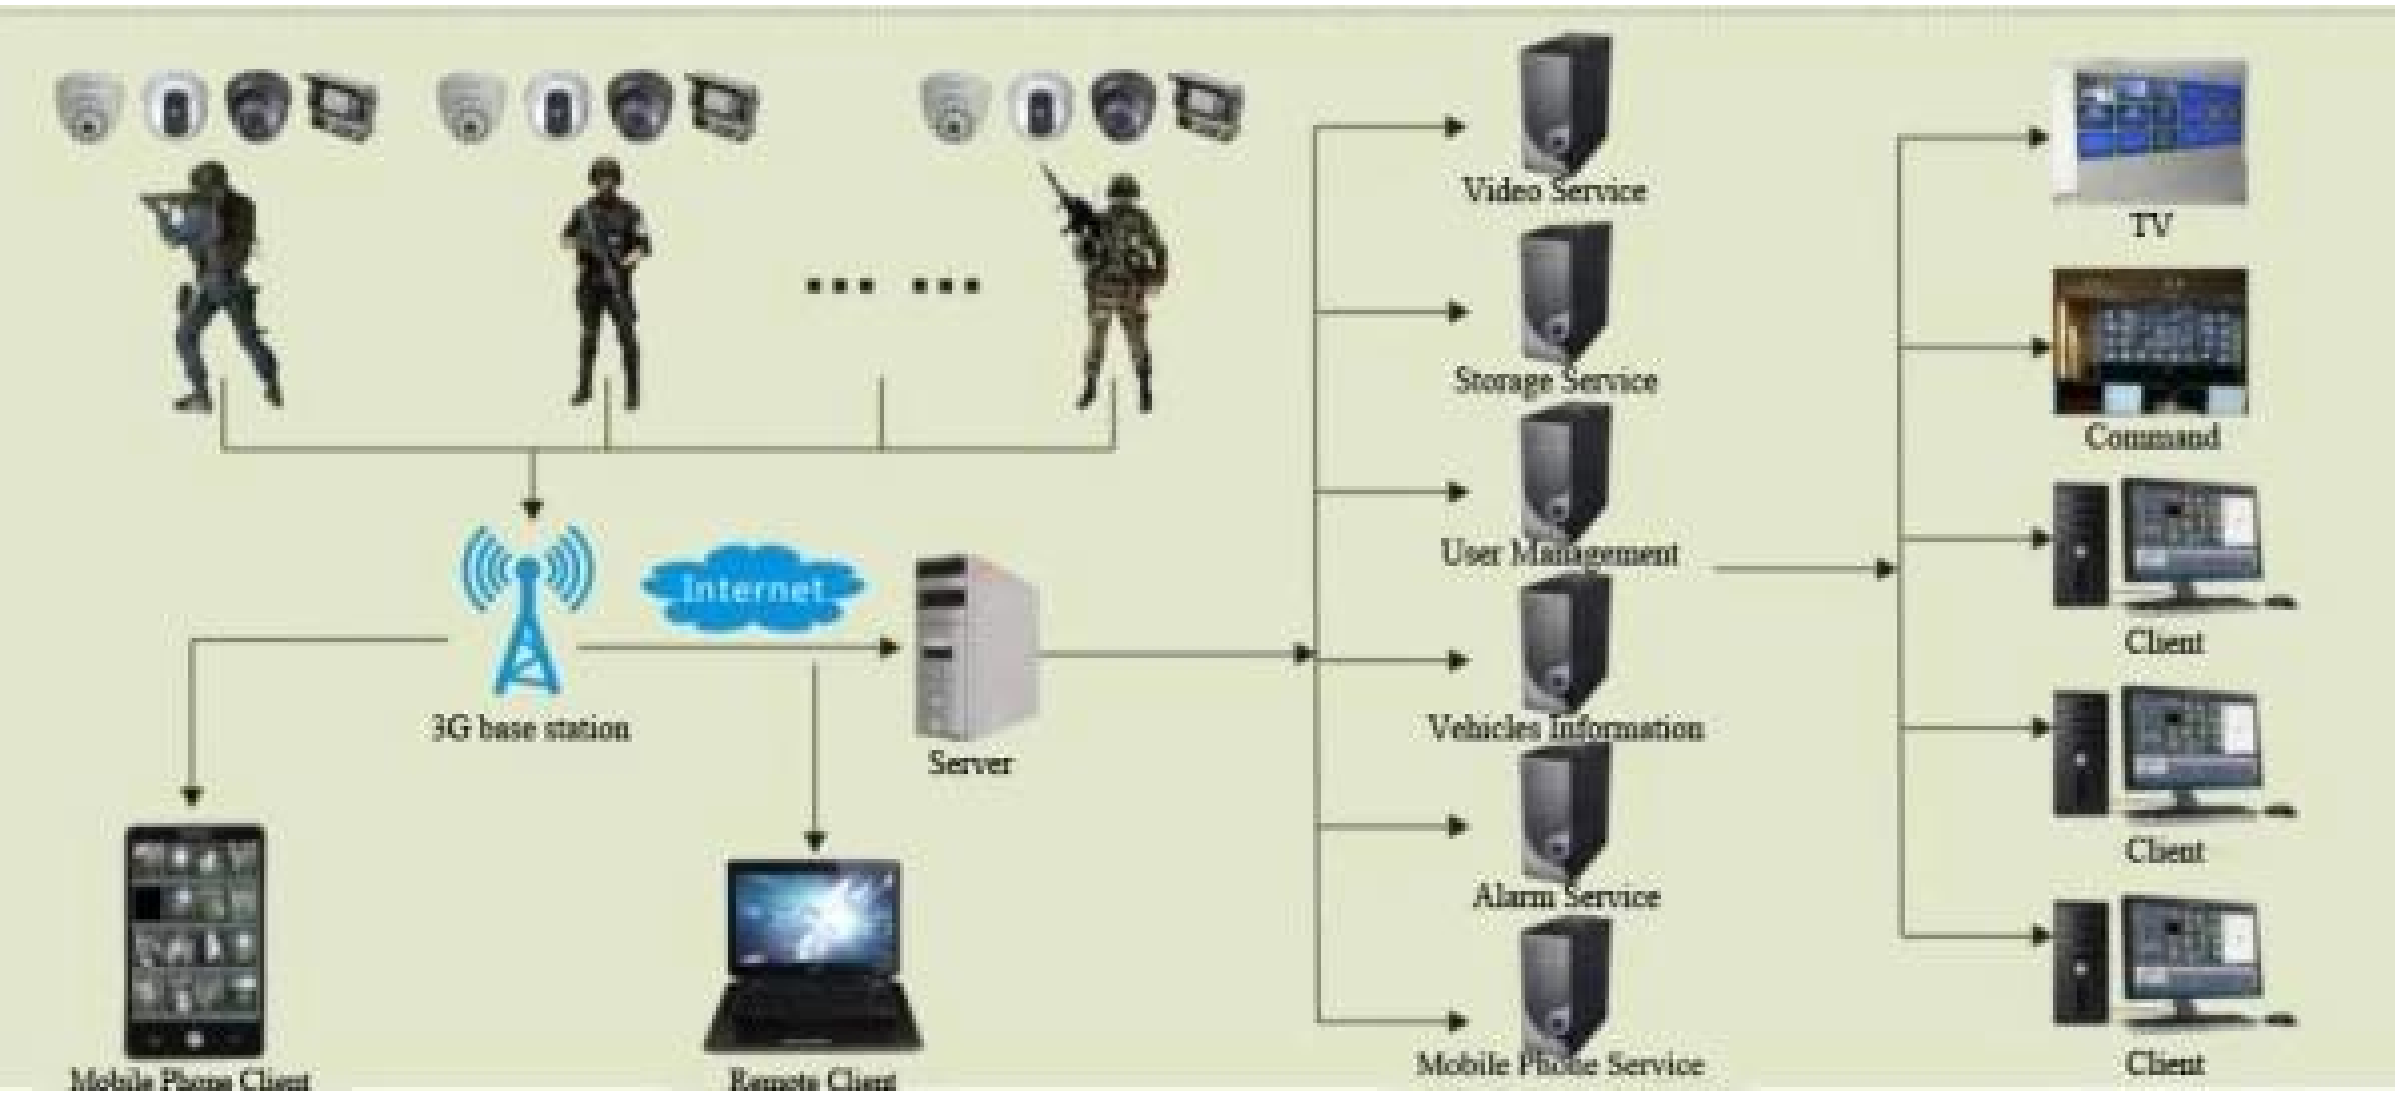

□□

□□□□		□□
□□□□□□□□NBSP□□□□□□		□□□□□
□□□□□□NBSP□□□□		Main device: work independently to realize local record Auxiliary device: GPS / 3G, backup battery
□□□□□□□NBSP□□□□□NBSP□□□□□□□□□□		□□·NBSP□□□□□□NBSP□;□□□□□□□□□□□NBSP□□□NBSP□□□□□NBSP□□□□NBSP□□□□□□□□NBSP□□□□□□□
□□□	□□□□NBSP□□□□	□□□NBSP□□□□□□NBSP□□□□□□□□NBSP□□□□□NBSP□;□□NBSP□□□□□□□□NBSP□□70℃□□NBSP□□CMOS□NBSP□□□□□□ □□□□□□□□□□□NBSP□□0.1Lux
	OSD	□□□□□□□NBSP□□□□038;□NBSP□□□□□□□□□NBSP□□□□□□□□NBSP□□ID□NBSP□□GPS□□NBSP□
	□□	264□NBSP□□□Hisilicon□NBSP□□□□□NBSP□□□□□□□□□□□NBSP□□□□□□□□□NBSP□□□□□NBSP□□□□□□□□□
	□□□□NBSP□□□□□	VGA□NBSP□□□□□NBSP□□□□□□□□□□□□□NBSP□□QVGA□NBSP□□□□□□□□□
	□□□□NBSP□□□□□□NBSP□□□□	QVGA□□NBSP□□400kbps□□NBSP□□□□NBSP□□1.5Mbps□□□NBSP□□4□NBSP□□□□□□NBSP□□□□NBSP□□□□□□NBSP□□□□□□NBSP□□□□□□□□□ VGA□□NBSP□□1000kbps□NBSP□□□□NBSP□□2Mbps□□□NBSP□□4□NBSP□□□□□□NBSP□□□□NBSP□□□□□□NBSP□□□□□□NBSP□□□□□□□□
	□□□□□□NBSP□□□□	□□□□NBSP□□□□□□NBSP□□□□□□□□NBSP□□□□□□NBSP□□□□□□□□
	□□□□□NBSP□□□□□□□	□□□□
□□□□□	□□□□□□NBSP□□□□	□□□NBSP□□□□□
	□□□□□□NBSP□□□□	□□□NBSP□□□□□□□□□□NBSP□□□GT; 1W
	□□	G.726
□□	□□□□□□NBSP□□□□□□	□□□□SD□NBSP□□□□□□□□NBSP□□□□□□□□NBSP□□1G□NBSP□□□□NBSP□□32G
	□□□□□NBSP□□□□□□□□/□□□□	ASF□NBSP□□□□□□□□NBSP□□□□□□□□NBSP□□□□□□NBSP□□FAT32□NBSP□□□□□□□□NBSP□□□□□□
	□□□□□□□□NBSP□□□□□	□□□□□□□□□NBSP□□□□□NBSP□□□□□NBSP□□□□□□□□□□□□□NBSP□□□□□□□□NBSP□□□□□□□□□NBSP□□□□
	□□□□□□□□NBSP□□□□	□□□NBSP□□□□□NBSP□□□□□□NBSP□□□□□□□□NBSP□□NBSP□□□□□□;□□□□NBSP□□□□□□□□□□NBSP□□□□□
	□□□□□□□□NBSP□□□□	Support fast forward, fast backward, play, pause, support 2, 4, 8, 16 times speed fast forward or fast backward, support playback of file by time
□□□□□□NBSP□□□□□NBSP□□□□□□NBSP□□□□□□□□		Built-in 3G wireless transmission module, WCDMA, CDMA2000, TD-SCDMA system optional; Compatible with GPRS, EDGE;
GPS□NBSP□□□□□□NBSP□□□□□□□		□□□NBSP□□GPS□;
□□□□□□NBSP□□□□□□□NBSP□□□□□□NBSP□□□□□□□	□□□	2.4□NBSP□□□□□
	□□□	TFT
	□□□	480 * 234
□□□□NBSP□□□□□□□□NBSP□□□□038;□NBSP□□□□	□□□□NBSP□□□□□□□NBSP□□□□	Manual startup/shutdown; support manual off-screen, automatic off- screen
	□□□□□□NBSP□□□□	□□□□NBSP□□□□□□□□□NBSP□□□1500mAh□□NBSP□□3.7V □□□NBSP□□□□□□□□NBSP□□2100mAh□□□NBSP□□7.4V
	□□□NBSP□□□□	2□NBSP□□□□
	□□□□□□NBSP□□□□	□□□NBSP□□□□□□□□□NBSP□□□□□□NBSP□□□□NBSP□□□□□□NBSP□□□□□□□□□NBSP□□4□NBSP□□□□ Working time of complete device (main device and auxiliary device): 5 hours, auxiliary device can supply power to main device
□□□□□□NBSP□□□□	□□	-20°C□NBSP□□□□NBSP□□+ 50°C
	□□	20□□NBSP□□NBSP□□□□□□80□
□□□□□□□	□□□□NBSP□□□□□□	50□W□□NBSP□□X90□H□NBSP□□X28□D□□NBSP□□□□
	□□□NBSP□□□□□□	70□W□□NBSP□□X110□H□NBSP□□X28□D□□NBSP□□□□
□□		□□□□NBSP□□□□□□□□NBSP□□□□NBSP□□□□□□NBSP□□□□□□NBSP□□95□□□□□NBSP□□□□□□NBSP□□□□□□NBSP□□307.5□□□ □□□NBSP□□□□□□□□□NBSP□□□□□□NBSP□□□□□□NBSP□□238□□□□□NBSP□□□□□□NBSP□□□□□□NBSP□□352□□□

CE□FCC ROHS□□

VERIFICATION OF CONFORMITY

Verification of Conformity

VERIFICATION OF CONFORMITY

Verification of Conformity

CERTIFICATE OF CONFORMITY

CERTIFICATE
of Conformity

CERTIFICATE OF CONFORMITY

CERTIFICATE
of Conformity

CERTIFICATE OF CONFORMITY

CERTIFICATE
of Conformity

RoHS

CERTIFICATE OF CONFORMITY

CERTIFICATE
of Conformity

RoHS

□□□□

Richmor
锐驰曼
Production line
Aging test
Area to be tested

□□□□□