Forklift Hardware



All Al Integrated Terminal

Waterproof Level: IP67, Explosion proof, High heat dissipation and easy installation



H.265/H.264 compression mode

Built-in DMS camera

Built in 4G/WIFI module

BD/GPS module





Product Parameter

.

	NT-41- 6	ACTED LTD EDD LTD/C II	
Basic parameter	Network format	4G TDD-LTE, FDD-LTE/full network access	
	Memory	2Gb	-
	Integrated	AHD 1080p camera (IF DMS is Infrared black and white	
	camera	camera)	
Hardware features	position	Dual-mode positioning, supports GPS+Beidou: positioning	
		accuracy ≤10m (95% probability);	
		Positioning time, hot start ≤5s, cold start ≤45s	
	WiFi (optional)	2.4G; IEEE 802.11b/g/n	15
	MIC	Single microphone, supports echo and noise cancellation	
	G-sensor	3-axis gravity acceleration sensor	
3G/4G	module type	Support built-in 3/4G wireless transmission function,	+
		TDD-LTE, FDD-LTE	
Interface	video interface	Expansion harness supports expansion of 1-channel video	
	SIM card holder	SIM card holder*1 (medium card)	
	Communication Interface	Integrated 1-way RS232 serial port	
	Can (optional)	Can be scalable	
Antenna	BD/GPS antenna	Built-in/external antenna available	
	4G antenna	Built-in antenna	
	WIFI antenna	Built-in antenna	
Power	power input	9-110V wide voltage input	
	Working current	12V 0.35A without infrared (MAX)	
	low power mode	12V 0.5A turns on infrared (MAX)	
		A STATE OF THE STA	15.

AI Function



Authorized Operation Face Recognition

Face recognition are required before operation. Computer image processing technology is used to extract portrait feature points from the video for intelligent analysis to prevent drivers from skipping work and other unregistered drivers from operating the vehicle.







Driver Monitoring Status Analysis

Dangerous behaviors will be detected by DMS camera such as Fatigue(eye close, yawn), distraction, smoking and calling, also will send voice alarms to drivers and alarms will be uploaded into the operation center.





Blind Spot Detection

BSD camera is optional. People in blind spot area can be detected. When people are detected in blind area, there will be different level alarms including sound and lamp. Once people are in the impact zone, The forklift automatically brakes to stop (with throttle controller)





Speed Sensor and Alarm Reminder (R-WATCH)

Speed perception will be carried in a field without positioning. It also provides voice and beep sound prompts for speeding, and can display alarm type and vehicle speed





Safety Seatbelt Monitoring

After installing the seat belt warning device, the vehicle will not be started if the seat belt is not fastened.



- > Real-time monitoring of non-fastening of seat belts and alarm reminders will be carried out.
- Violation alarms will be uploaded to the platform for statistical analysis to ensure the safety of forklift operators.



Vehicle Platform management



Data recording

Switching time and working time, loading time and mileage



Reminder function

Forklift maintenance ,annual inspections, operator certificate and equipment expiry reminders









Accident recording

Driver identity information, time of occurrence, location and other information





Vehicle dispatching system

Reasonable calls based on resource conditions, avoiding uneven distribution of resources







Vehicle Management Software(VMS)

Management and scheduling: All vehicle videos, GPS information, alarm information, video management, user management, etc.










Live Video


Real-time video browsing, supports simultaneous browsing of multiple screens, vehicle location information, equipment status, GPS map display, etc.

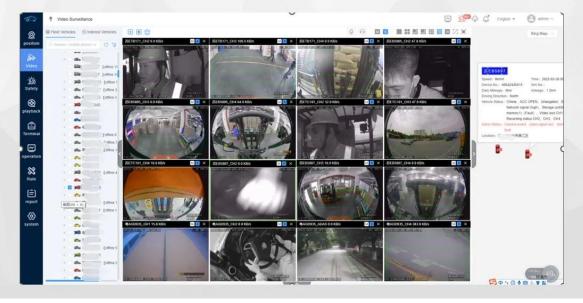




Operation Management

Evidence query such as video loss, offline, GPS abnormal and other vehicle information

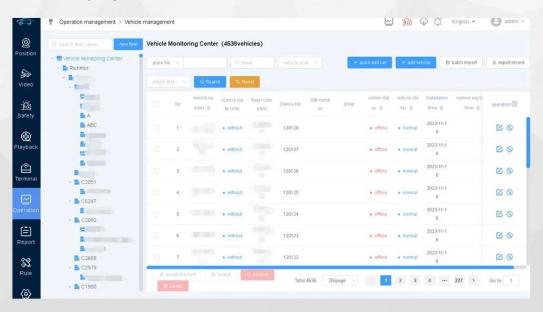

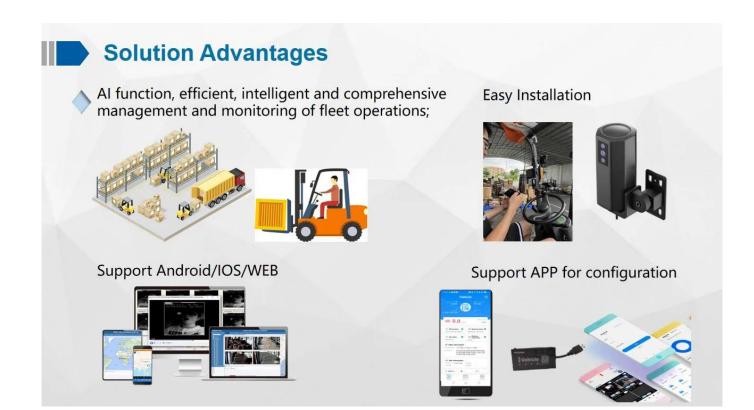

Company Profile

