


High quality 1080 AHD mobile DVR with wide voltage 4CH 3G 4G wifi MDVR for car van trunk

---

**Richmor**

Shenzhen Richmor Technology Development CO.,Ltd is a global and professional MDVR/MNVR manufacturer and solution provider specializing in vehicle monitoring system design and deployment for over 10 years

---

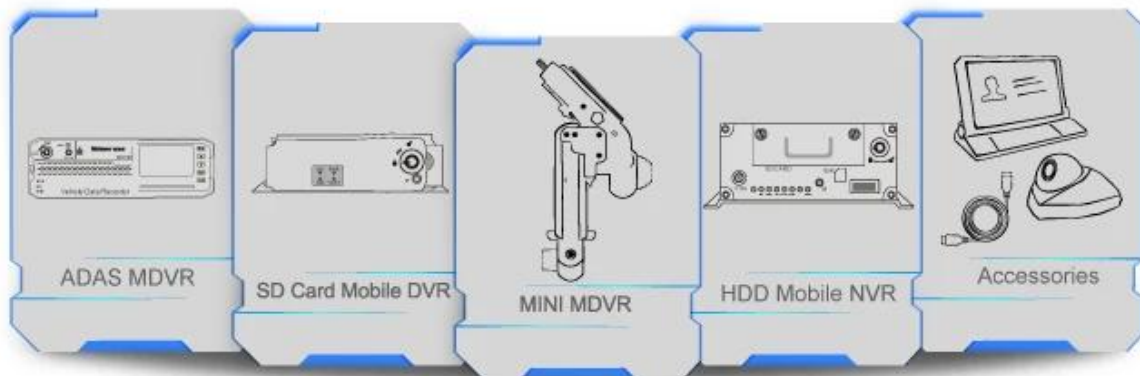

# COMPANY INFORMATION

## Company Introduction

Shenzhen Richmor Technology Development CO.,Ltd is a global and professional MDVR/MNVR manufacturer and solution provider specializing in vehicle monitoring system design and deployment for over 10 years

### 01. Our company



### 02. Office area

### 03. Service team



### 04. Factory Photos

**High quality million AHD mobile DVR with wide voltage 4CH 3G 4G wifi MDVR for car van trunk**



# PRODUCT SHOW

Product's Front Side

Display

Military Design/ Good Stability/Durable /Shockproof & Earthquake Resistant



Product's Back Side

Display

Wide Voltage Design / Data Comprehensive Protection / High Security




# STRUCTURE

## Front Panel

### Details


Professional Security Device/Powerful Functions/ User-friendly Button Operation/ Easy to Use

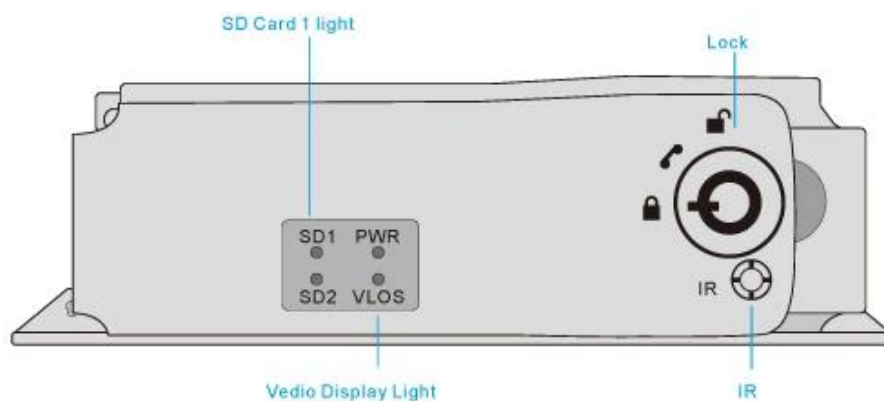

## Back Panel

### Details

Aviation AV&DV Input / Steady Port/ Strong Shockproof Ability/ Simple & Convenient

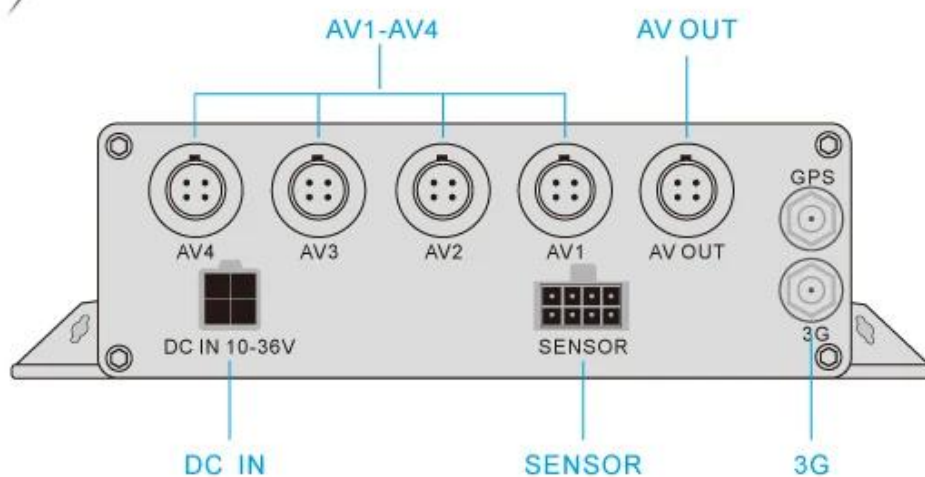

# DETAILED SPECS



# FUNCTION DISPLAY




## Mobile Monitoring Management Platform

RMVS is a system of centralized management and monitoring of all kinds of vehicles based on wireless network. Perform real-time monitoring, GPS/BD positioning, video storage, vehicle scheduling, alarm and alarm, etc.

### Related Kits



# INSTALLATION

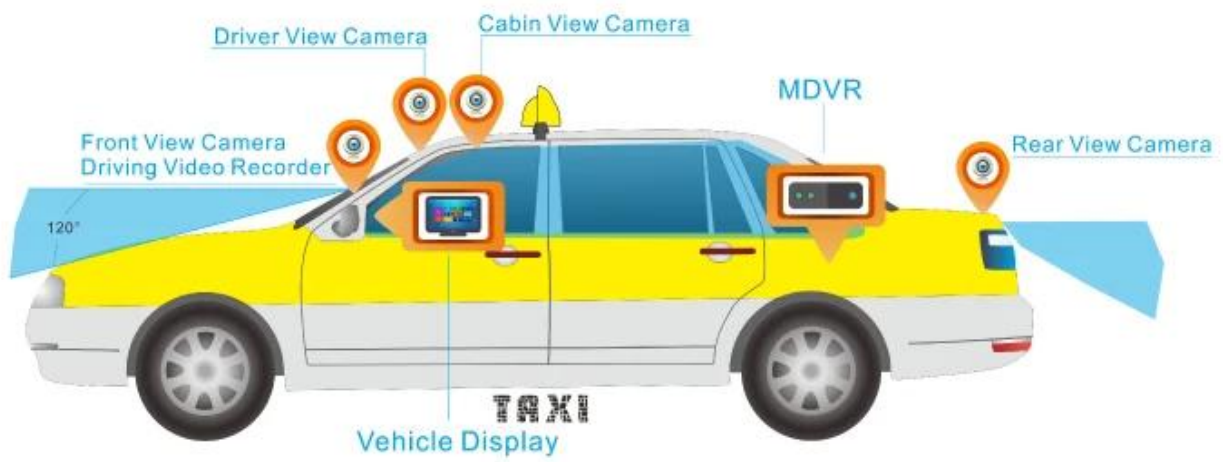

# DEVELOPMENT HISTORY

**Sailing  
2008**

Richmor Founded  
in a 30㎡ Studio

Provided MDVR ODM  
Service for Public Companies

**Challenging  
2011**

Moved into Longhua 500㎡ Factory  
Built Sales Team  
Guangdong TV Interviewed at CPSE 2011

**Innovating  
2016**

First Launched 1080P 8CH AHD HD  
MDVR & 4G Body Camera

Won the Golden Lion Award at ITS Expo

Won 10000PCS Order of Beijing Public  
Bus via Strict National Las Testing

Got Certificate "National High-Tech Enterprise"

**Improving  
2010**

Moved into 70㎡ Office Building  
Officially Launched Own Brand Products  
Thousand MDVR Order  
Got From Changsha  
Transportation Group in Hunan

**Striding  
2014**

Moved into Bantian 1300㎡ Industrial Area  
Launched New 3G Body Camera &  
Ministerial Standard Products  
3G Body Camera become Brasil World  
Cup Security Products

**Transforming  
2017**

Richmor Moved into 3000㎡ Building

Expanding Service & Developing  
Team to Provide More Quality Products

Provide More Service & Support to  
All Clients & Partners

# CERTIFICATION



Detailed

High quality million AHD mobile DVR with wide voltage 4CH 3G 4G wifi MDVR for car van trunk

Item		Parameter	
OS		Linux	
Video Compression		H.264	
Operation Interface		OSD menu	
Video Record System	Video Input	Support 4 channels Full real-time AHD 720P	
	Video Output	1 channel composite video output	
	Display	1/2/4 channels full screen	
	Signal system	PAL/NTSC (PAL @100Frame, NTSC@120 Frame	
	Resolution	Support 4 channels Full real-time AHD 720P	
	Record Format	Synchronized A/V recording	
Audio	Audio Input	4 Channel	
	Audio Output	1 channel	
	Compression	G.726	
Alarm	Input	4 channels	
	Output	1 channel	
Storage		Up to 256GB, 128GB for each	
Communication Port		1CH RS232 / 1 channel RS485	
G-sensor		Built in, support 3 Axis Motion Detection with user set ranges , for X,Y and Z coordinates	
Wireless communications		GPS /3G /4G /WIFI optional	
GPS		GPS /Glonass	
Video Playback	Video Search	Search video by Record Time/ Type etc	
	Playback	A/V,GPS,Mapview,Speed,G-sensor,video files available for playback on PC.	
	CMS	Wireless(require Wi-Fi or cellular), real-time monitoring .GPS and alarm etc	
Operating Voltage	Voltage Input	8V ~ 36V DC	
	Voltage Output	12V @1.2A 4channels, with IR	12V @0.9A 2channels, with IR
	Power -off Protection	All video information can be saved automatically when the power cut off, and make sure that all the files can not be damaged	
	UPS	External UPS battery optional, support 24 hours monitoring	
Other	Operation Temperature	-40°C ~ + 70°C	
	Humidity	20% ~ 80%	
	Dimension	112*36*138mm	
	Weight	360g	





# INSTALLATION

