8channel hdd 720p 3G vehicle dvr recorder with High Qulity LCD Display Screen


Product Specifications:


| project | | parameter | |
|---------------------------|---|--|--|
| operating system | | Linux | |
| Language | | English / Chinese / custom | |
| Video compression | | H.264 compression | |
| OSD | | Overlaying date and time and vehicle ID and other information | |
| GUI | GUI | Set the system parameters with the remote control | |
| Video recording system | Video input | 4CH 1080P/960P / 720P AHD Input, Aviation Connectors, 1.0Vp-p, 75Ω | |
| | Video output | $1~\text{CVBS},~1.0\text{Vp-p},~75\Omega,$ aviation, support 1CH full screen, 4CH screen view | |
| | Preview | Supports preview of 1 channel and 4 channels. Support manual / alarm trigger full-screen preview | |
| | Resolution | 720P / D1 / HD1 / CIF, MAX: 4 720P and 4 D1 | |
| | Picture quality | Level 1-4, Level 1 is the highest level. | |
| | Video standard | PAL: 100f / s, CCIR625 line, 50field; NTSC: 120f / s, CCIR525 line, 60 fields; CIF: 256Kbps ~ 1.5Mbps, 8-level video quality optional; HD1: 600Kbps ~ 2.5Mbps, 8-level video quality optional; D1: 800Kbps ~ 3Mbps, 8-level video quality optional; 720P: 4Mbps-6Mbps, multi-level video quality optional | |
| | Recording mode | After power on the default setting for automatic recording. Support timer recording, alarm trigger recording and manual recording. | |
| Audio | Audio input | 4CH aviation plug input | |
| | Audio output | 2CH, the front panel connects to the headphones, the rear panel connects to the BNC | |
| | compression | G.726 compression, 8KB / s speed | |
| Alarm input | | 7CH alarm input, 1CH AD input, pulse speed input, alarm linkage | |
| Alarm Output | | 2 alarm output, support for light / sound alarm sensor, oil / power off | |
| interface | | 3CH RS232, POS / Fuel Sensor / LED Advertising Connection | |
| Interface | 1CH 485 interface, connect the PTZ camera | | |
| Wireless transmis | ssion | Support built-in 3G transmission, WCDMA, CDMA2000, GPRS, EDGE; Built-in 4G module optional, TDD-LTE, FDD-LTE | |
| GPS location | | Support built-in GPS / BD module | |
| storage | hard disk | Maximum 2.5 "1TB hard drive | |
| | SD card | Maximum 128GB SD card image record keeping data safe | |
| | Updated | Support USB update, SD card update, OTA remote update | |
| | file format | H.264 | |
| | File system | Special FAT32 file system | |
| | USB | USB interface on the front panel data backup U disk, hard disk | |
| | Video search | Search by recording time / record type, etc. | |
| Record replay | Playback | Max also supports 4CH Replay / Stop / Fast / Slow | |
| | | Support for x 2, x 4, x 8, x 16 forward and backward playback. | |
| Safety | | User / Administrator 2 different passwords | |

| Optional features | Voice calls | Support each other voice calls |
|-------------------|-------------------------|--|
| | TTS voice broadcast | Support TTS voice playback. |
| | Serial extension | Support LED advertising screen, oil level sensor, POS, bus station broadcasting, car OBD and other external equipment |
| | Energy management | Wide voltage. Support timing / delay off |
| Voltage & Power | Input voltage | DC: + 6V - + 36V |
| | The output voltage | + 12V ~ 1.5A, + 5V ~ 1.5A |
| | power | Working & It; 5W |
| working | ng temperature -20 °C - | -20 °C - +70 °C |
| environment | humidity | 20% - 80% |
| other | size | 200 (D) * 187 (W) * 62 (H) mm |
| other | weight | 1.90 kg |

Product Image:



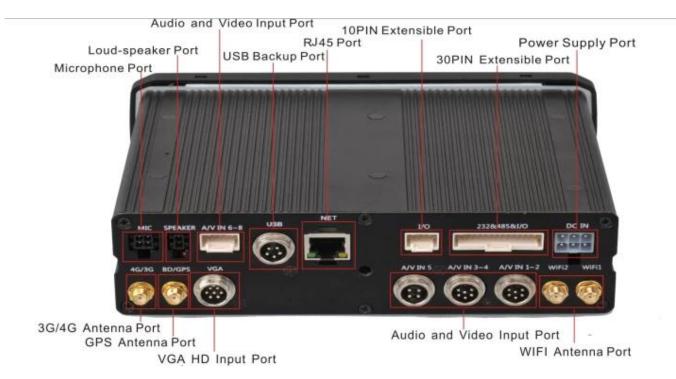

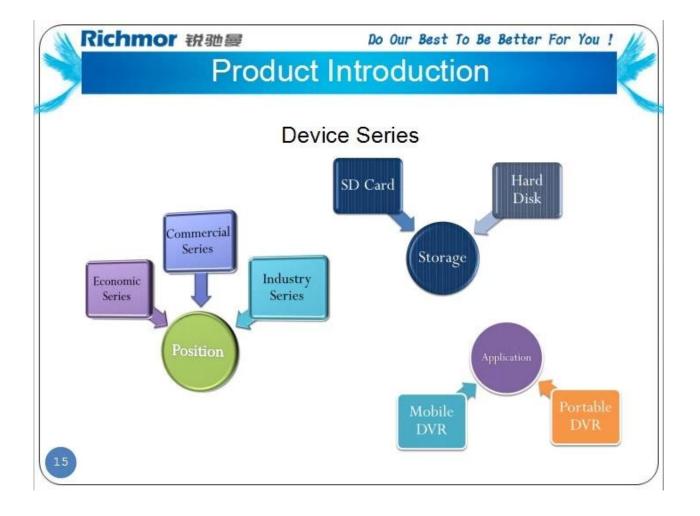



Client user graphical interface





Our mdvr supports PC, mobile phone and other mobile client monitoring.

| stemci İndirme | | Geleneksel Türkiye Taylandlı |
|---------------------|-----------------------|------------------------------------|
| Windows | 2 | Portugues |
| | | İspanya Bulgar |
| İndir | Indir Version: 7.0.3 | Russian O Version: 7.0.0.10 |
| Güncelle: 20151123 | Güncelle: 20150523 | Güncelle: 20150801 |
| | | |
| Jygun Program İndir | | |

Appliacation

FUNCTIONS

- Video& Audio real-time monitoring
- Online Vehicle Status
- Satellite Map
- GPS
- Video Storage
- Tracking Display
- Intercom
- Fuel Sensor
- G-Sensor
- Temperature-Sensor



certificate



Company and factory





Richmor OEM & ODM Service Brasil World Cup Supplier



exhibition:

Richmor

CPSE2012 in Shenzhen



CPSE2012-- Guangdong TV Report-Shenzhen Richmor



Welcome to contact us for more details

Best Regards Amily Zhang

HAND US YOUR TRUST, OFFER YOU OUR BEST!!! Shenzhen Richmor Technology Development Co.,LTD

Email: <u>overseasales-2@rcmcctv.com</u> Skype: rcmcctvsales2 QQ: 2355778097 MB/Whatsapp: +86 18929314790 Website: http://www.richmor.net/ ADD: 6th Floor, F Building, Xinzhi Industrial Park, Yangmei,Bantian,Longgang, Shenzhen

