

RCM-MDR7104

product specification:

| | | |
|-----------------------|--------------------------|---|
| Item | | parameter |
| Operating System | | Linux |
| Language | | English/chinese/customized |
| Video Compression | | H.264 Compression |
| OSD | | overlays information such as date time and vehicle ID |
| GUI | Graphical user interface | setup system parameters with the remote control |
| Video Record System | video input | 4CH 960P/720P AHD input,aviation connector, 1.0Vp-p, 75Ω |
| | video output | 1 CVBS, 1.0Vp-p, 75Ω,Aviation,Support 1CH Full Screen,4CH Screen view |
| | preview | Support 1 channel and 4 channels preview., Support Manual/Alarm Trigger full screen preview |
| | resolution | 720P/D1/HD1/CIF, MAX:4 channels of 720P and 4 channels of D1 |
| | image quality | 1-4 levels, 1 is the highest level. |
| | video standard | PAL: 100f/s , CCIR625 line,50field; NTSC: 120f/s, CCIR525 line,60field; CIF: 256Kbps ~ 1.5Mbps, 8 level video quality optional; HD1: 600Kbps ~ 2.5Mbps, 8 level video quality optional; D1: 800Kbps ~ 3Mbps, 8 level video quality optional; 720P: 4Mbps-6Mbps, multi level video quality optional |
| | record mode | The default setting is auto recording after power on. Timed recording, alarm trigger recording and manual recording are supported. |
| Audio | audio input | 4CH Aviation Plug Input |
| | audio output | 2CH,headphone connect at front panel, BNC Connect on Back panel |
| | compression | G.726 compression, 8KB/s speed |
| Alarm Input | | 7CH Alarm Input,1CH AD Input,impulse speed input,Alarm Linkage |
| Alarm Output | | 2CH Alarm Output,Support Light/Sound alarm sensor,Oil/Power cut off |
| Interface | | 3CH RS232, POS/Fuel Sensor/LED Advertisement Connection |
| | | 1CH 485 Interface,Connect PTZ Camera |
| Wireless Transmission | | Support Built in 3G transmission,, WCDMA, CDMA2000,GPRS, EDGE; Built in 4G module optional, TDD-LTE, FDD-LTE |
| GPS Position | | Support Built GPS/BD Module |
| Storage | HDD | Max 2.5" 1TB HDD |
| | SD Card | Max 128GB SD Card Mirror Recording Keep Data Safety |
| | update | Support USB Updating, SD Card Updating,OTA Remote Updating |
| | file format | H.264 |
| | file system | Special FAT32 File System |
| | USB | USB Interface on Front Panel for data back up by U Disk,Hard Disk |
| Record Replay | video search | Search By Record Time/Record Type etc |
| | playback | Max support 4CH Replay /Stop/Fast/Slow at same time Support forward and backward play at the speed of: x 2,x4,x8,x16. |
| Security | | User/Admin 2 Level Different Password |

| | | |
|---------------------|---------------------|---|
| Optional Functions | voice call | Support voice call each other |
| | TTS Voice broadcast | Support TTS voice broadcast function. |
| | serial expand | Support LED Advertisement Panel,Oil Sensor, POS, Bus Station Broadcaster, Car OBD, ect. external device |
| Voltage & Power | Power Management | Wide Voltage.Support Timed/Delay off |
| | Input Voltage | DC:+6V - +36V |
| | Output Voltage | +12V~1.5A,+5V~1.5A |
| | Power | Working<5W |
| Working Environment | Temperature | -20℃ - +70℃ |
| | Humidity | 20% - 80% |
| Others | Size | 200 (D)* 187(W)* 62(H) mm |
| | Weight | 1.90Kg |

Product Show:







AV Input & Output Cables



Power Cable



IO Cables



Remote Control



3G Antenna



WIFI Antenna




CD (Manual & Software Inside)



7000 HDD Mobile DVR


Product Introduction

Device Series

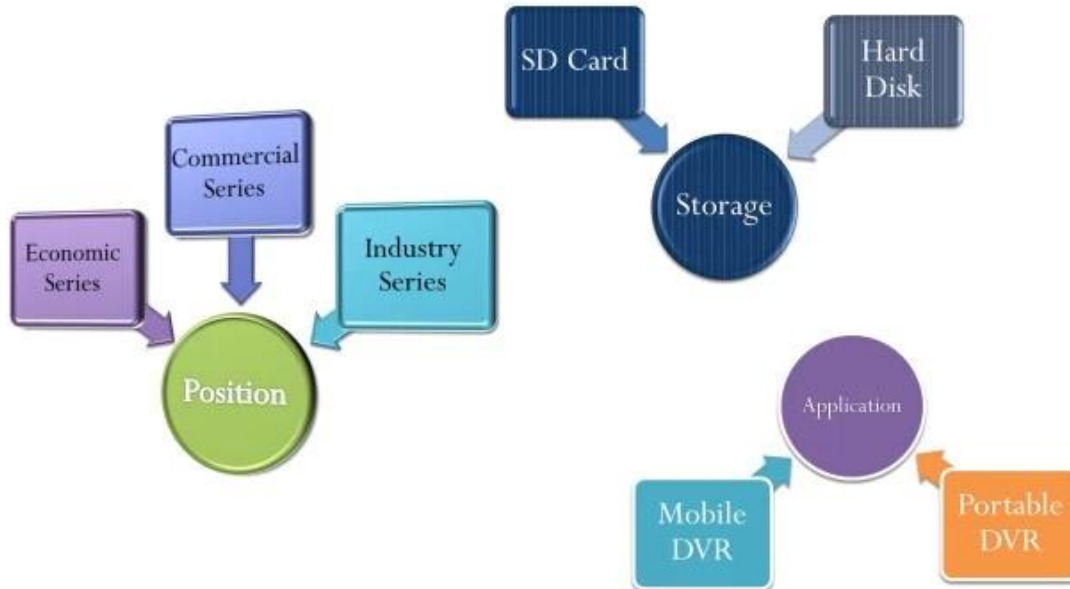

15

Product Advantage

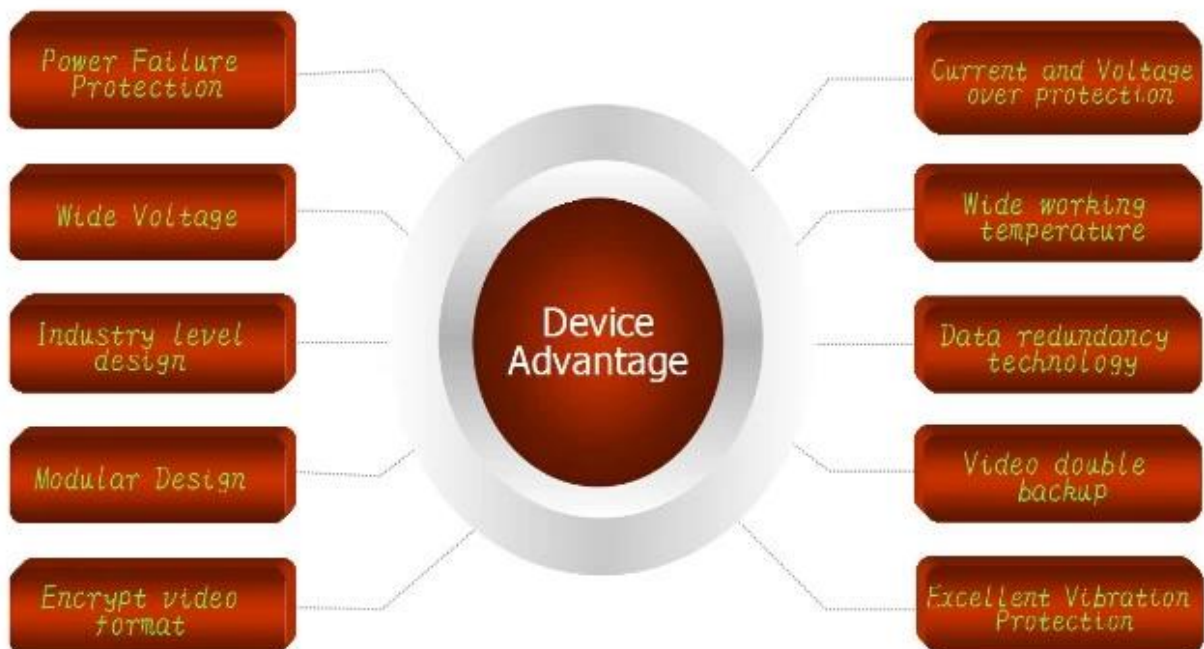

Client User Graph Interface

The interface is titled "移动视频监控平台" (Mobile Video Monitoring Platform). It features a top navigation bar with tabs for "欢迎登录, RCMTEST", "系统", "实时预览", "电子地图", "回放管理", "信息管理", and "系统设置".

On the left, there is a sidebar with a tree view showing the hierarchy of monitored vehicles. Below this is a table with columns for "状态", "云台", "色彩", and "语音".

The main area displays four video feeds labeled 1 through 4, each showing a different camera angle from a vehicle (贵C A6446). Below the feeds is a table with columns for "终端", "GPS时间", "位置", "速度", and "报警".

On the right, there is a map showing the location of the vehicle (贵C A6446) and a search bar. Below the map is a table with columns for "终端", "GPS时间", "位置", "速度", and "报警".

At the bottom, there is a status bar showing "运行时长: 00:01:04", "在线数: 3 / 定损数: 1 / 欠费: 0 / 总数: 11", "在线率: 27.27% / 定损率: 9.09%".

用户登录

用户名: RCMTEST
密码: *****
服务器: 113.108.120.47
☒ 记住密码 ☐ 自动登录
登录 退出

移动视频监控平台

欢迎登录, RCMTEST 系统

终端列表 轮询列表 我的地图

监控中心(3/11)
贵州(1/1)
贵C A6446
CH1
CH2
CH3
CH4
桂KY7507
桂KY7569
80024
80119
D82868
子NPS001
桂KY7586
桂KY7599
贵B93017
贵C87762

状态 云台 色彩 语音

| 设备类型 | MDVR |
|-------|------------------------|
| 终端名称 | 贵C A6446 |
| 终端ID | 80109 |
| 公司 | 通运集团金融公司 |
| 所属分组 | 贵州 |
| 状态 | 在线 |
| GPS时间 | 2016-03-14 09:50:09 |
| 位置 | 贵州省遵义市习水县G4215(蓉遵高速公路) |
| 速度 | 74.10 km/h(南) |
| 费用 | 正常 |

1 贵C A6446 - CH1 - 0 KB/S
2 贵C A6446 - CH2 - 24 KB/S
3 贵C A6446 - CH3 - 0 KB/S
4 贵C A6446 - CH4 - 0 KB/S

GPS时间: 2016-03-14 09:50:09
位置: 贵州省遵义市习水县G4215(蓉遵高速公路)
速度: 74.10 km/h(南)
报警: 0

终端: 贵C A6446
GPS时间: 2016-03-14 09:50:09
位置: 贵州省遵义市习水县G4215(蓉遵高速公路)
速度: 74.10 km/h(南)
报警: 0

终端: 桂KY7507
GPS时间: 2016-03-14 09:50:17
位置: 广西壮族自治区玉林市博白县人民中路38号
速度: 11.00 km/h(北)
报警: 0

终端: 桂KY7569
GPS时间: 2016-03-14 09:50:38
位置: 广西壮族自治区玉林市博白县X403
速度: 27.00 km/h(西北)
报警: 0

终端: 桂KY7599
GPS时间: 2016-03-14 09:49:03
位置: 广西壮族自治区玉林市博白县S216
速度: 0.00 km/h(东)
报警: 0

GPS监控 报警信息 系统事件 抓拍图片

运行时长: 00:01:04 在线数: 3 / 定损数: 1 / 欠费: 0 / 总数: 11 在线率: 27.27% / 定损率: 9.09%

our mdvr support mobile Client monitoring like PC, mobile phone etc.

İstemci İndirme



Windows

İndir



Version: 7.4.0.15

Güncelle: 20151123



indir



Version: 7.0.3

Güncelle: 20150523



Version: 7.0.0.10

Güncelle: 20150801

Uygun Program İndir



certificate

CERTIFICATE QUALITY



3C



CE



FCC



ROHS



VERIFICATION OF CONFORMITY



TCB



TCB



PATENT CERTIFICATE

company and factory



Exhibition:

Richmor

CPSE2012 in Shenzhen



CPSE2013

10.29-10.31

4 Booth we have

Welcome you !!!



CPSE2012-- Guangdong TV Report-Shenzhen Richmor



For more details about products ,email our representative Sylvia.