

RCM-MDR7104

product specification:

Item		parameter
Operating System		Linux
Language		English/chinese/customized
Video Compression		H.264 Compression
OSD		overlays information such as date time and vehicle ID
GUI	Graphical user interface	setup system parameters with the remote control
Video Record System	video input	4CH 960P/720P AHD input,aviation connector, 1.0Vp-p, 75Ω
	video output	1 CVBS, 1.0Vp-p, 75Ω,Aviation,Support 1CH Full Screen,4CH Screen view
	preview	Support 1 channel and 4 channels preview., Support Manual/Alarm Trigger full screen preview
	resolution	720P/D1/HD1/CIF, MAX:4 channels of 720P and 4 channels of D1
	image quality	1-4 levels, 1 is the highest level.
	video standard	PAL: 100f/s , CCIR625 line,50field; NTSC: 120f/s, CCIR525 line,60field; CIF: 256Kbps ~ 1.5Mbps, 8 level video quality optional; HD1: 600Kbps ~ 2.5Mbps, 8 level video quality optional; D1: 800Kbps ~ 3Mbps, 8 level video quality optional; 720P: 4Mbps-6Mbps, multi level video quality optional
	record mode	The default setting is auto recording after power on. Timed recording, alarm trigger recording and manual recording are supported.
Audio	audio input	4CH Aviation Plug Input
	audio output	2CH,headphone connect at front panel, BNC Connect on Back panel
	compression	G.726 compression, 8KB/s speed
Alarm Input		7CH Alarm Input,1CH AD Input,impulse speed input,Alarm Linkage
Alarm Output		2CH Alarm Output,Support Light/Sound alarm sensor,Oil/Power cut off
Interface		3CH RS232, POS/Fuel Sensor/LED Advertisement Connection
		1CH 485 Interface,Connect PTZ Camera
Wireless Transmission		Support Built in 3G transmission,, WCDMA, CDMA2000,GPRS, EDGE; Built in 4G module optional, TDD-LTE, FDD-LTE
GPS Position		Support Built GPS/BD Module
Storage	HDD	Max 2.5" 1TB HDD
	SD Card	Max 128GB SD Card Mirror Recording Keep Data Safety
	update	Support USB Updating, SD Card Updating,OTA Remote Updating
	file format	H.264
	file system	Special FAT32 File System
	USB	USB Interface on Front Panel for data back up by U Disk,Hard Disk
Record Replay	video search	Search By Record Time/Record Type etc
	playback	Max support 4CH Replay /Stop/Fast/Slow at same time Support forward and backward play at the speed of: x 2,x4,x8,x16.
Security		User/Admin 2 Level Different Password

Optional Functions	voice call	Support voice call each other
	TTS Voice broadcast	Support TTS voice broadcast function.
	serial expand	Support LED Advertisement Panel,Oil Sensor, POS, Bus Station Broadcaster, Car OBD, ect. external device
Voltage & Power	Power Management	Wide Voltage.Support Timed/Delay off
	Input Voltage	DC:+6V - +36V
	Output Voltage	+12V~1.5A,+5V~1.5A
	Power	Working<5W
Working Environment	Temperature	-20℃ - +70℃
	Humidity	20% - 80%
Others	Size	200 (D)* 187(W)* 62(H) mm
	Weight	1.90Kg

Product Show:







AV Input & Output Cables



Power Cable



IO Cables



Remote Control



3G Antenna



WIFI Antenna




CD (Manual & Software Inside)



7000 HDD Mobile DVR


Product Introduction

Device Series

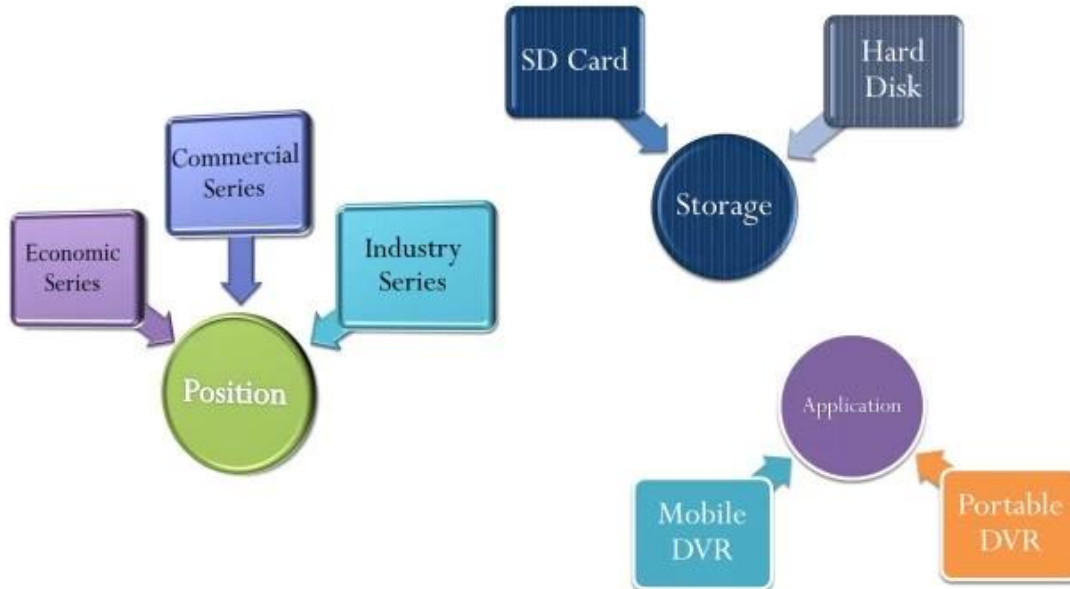

15

Product Advantage

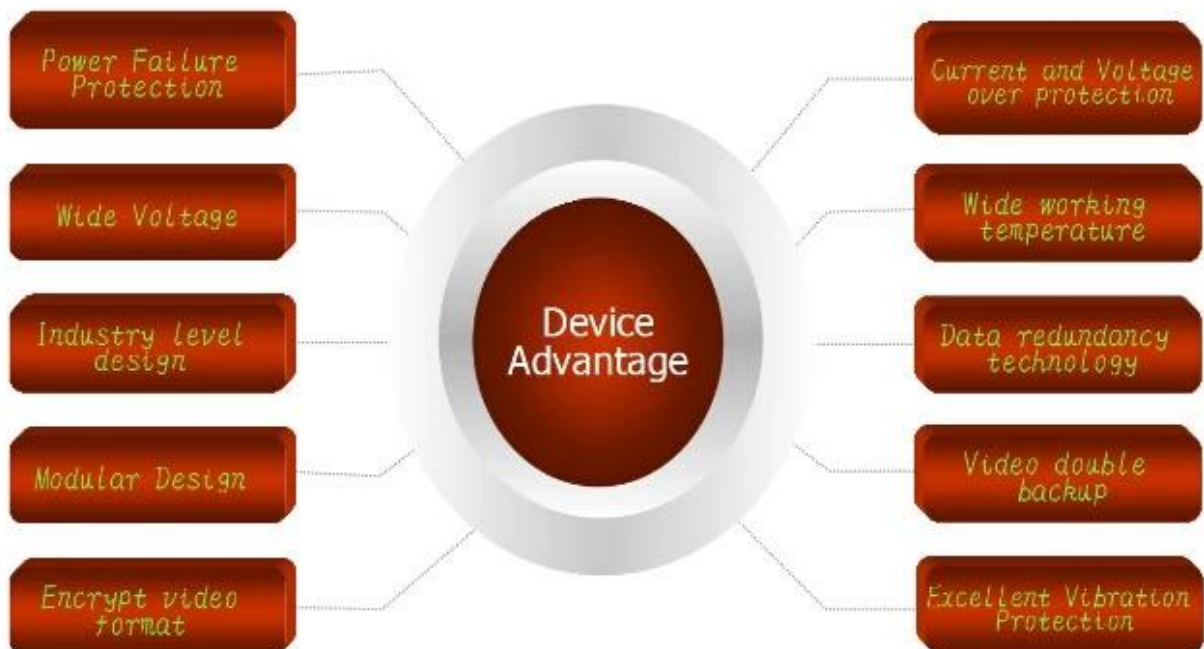

Client User Graph Interface

The interface is titled "移动视频监控平台" (Mobile Video Monitoring Platform). It features a top navigation bar with tabs for "欢迎登录, RCMTEST", "系统", "实时预览", "电子地图", "回放管理", "信息管理", and "系统设置".

On the left, there is a "终端列表" (Terminal List) showing a hierarchy of devices under "贵州(11)" (Guizhou (11)). The list includes terminals like "贵C A6446", "桂KY7507", "桂KY7569", "80024", "80119", "D82868", "子NPS001", "桂KY7586", "桂KY7599", "贵B93017", and "贵C87762". Below the list is a table with columns for "状态" (Status), "云台" (Cloud Platform), "色彩" (Color), and "语音" (Voice).

The main area displays four video feeds labeled "贵C A6446 - CH1 - 0 KB/S", "贵C A6446 - CH2 - 24 KB/S", "贵C A6446 - CH3 - 0 KB/S", and "贵C A6446 - CH4 - 0 KB/S". The feeds show interior views of a vehicle and a road view. Below the feeds is a "GPS监控" (GPS Monitoring) section with a table showing real-time data for the terminals.

On the right, there is a "用户登录" (User Login) panel with fields for "用户名" (Username), "密码" (Password), "服务器" (Server), and checkboxes for "记住密码" (Remember Password) and "自动登录" (Auto Login). Below the login panel is a "地址" (Address) search bar and a map showing the location of the vehicle.

At the bottom, a status bar displays "运行时长: 00:01:04" (Runtime: 00:01:04), "在线数: 3 / 定损数: 1 / 欠费: 0 / 总数: 11" (Online: 3 / Estimated Loss: 1 / Due: 0 / Total: 11), and "在线率: 27.27% / 定损率: 9.09%" (Online Rate: 27.27% / Estimated Loss Rate: 9.09%).

终端	GPS时间	位置	速度	报警
贵C A6446	2016-03-14 09:50:09	贵州省遵义市习水县G4215(蓉遵高速公路)	74.10 km/h(南)	
桂KY7507	2016-03-14 09:50:17	广西壮族自治区玉林市博白县人民中路38号	11.00 km/h(北)	
桂KY7569	2016-03-14 09:50:38	广西壮族自治区玉林市博白县X403	27.00 km/h(西北)	
桂KY7599	2016-03-14 09:49:03	广西壮族自治区玉林市博白县S216	0.00 km/h(东)	

our mdvr support mobile Client monitoring like PC,mobile phone etc.

[Anasayfa](#)[İndir](#)[Soru](#)[Language](#)

İstemci İndirme

 Windows İndir  Version: 7.4.0.15 Güncelle: 20151123	 İndir  Version: 7.0.3 Güncelle: 20150523	 İndir  Version: 7.0.0.10 Güncelle: 20150801
--	--	---

Uygun Program İndir

		
---	---	---

certificate

CERTIFICATE QUALITY



3C



CE



FCC



ROHS



VERIFICATION OF CONFORMITY



TCB



TCB



PATENT CERTIFICATE

company and factory



Exhibition:

Richmor

CPSE2012 in Shenzhen



CPSE2013

10.29-10.31

4 Booth we have

Welcome you !!!



CPSE2012-- Guangdong TV Report-Shenzhen Richmor



For more details about products ,email our representative Sylvia.