

4CH SD card h264 DVR Vehicle mobile device

(RCM-Mdr210 series)

Product Features

4CH \$number P 3 G 4 G mobile DVR

1. H. 264 compression mode, support for real 4CH \$number p mega pixel and input and analog standard to define camera input;
2. Exclusive allocation of DVR dedicated file system technology solutions repeatedly wipe cause file fragmentation, solve SD card file crash, data loss, unable to find SD card, and file damage, ensure data integrity.
3. 10-36v wide voltage input, adaptive ultra-low power design;
4. SD card Storage (2SD card, each maximum support \$number GB) can withstand the vibration of the car completely. Dust and other causes of data damage;
5. Support Gps BD sensor; High reliability air connectors.
6. Cost has two-sided stability, reliable, simple, intuitive menu control.

| RCM-MDR 210 Series | |
|--------------------|---|
| Model No. | function |
| RCM-Mdr 210x | Basic records, G sensors, an SD card |
| Rcm | GPS, G sensor, SD card |
| RCM-Mdr 210wgs | 3 G, GPS, G sensor, dual SD card slots |
| RCM-MDR 210FG | 3 G, 4 G, GPS, G sensor, dual SD card slots |
| RCM-MDR 210WG | 3 grams, WiFi, GPS, G sensor, dual SD card slots |
| RCM-MDR 210FG | 3 grams, 4 grams, WiFi, GPS, G sensor, dual SD card slots |

Detailed photos

4CH \$number P 3 G 4 G mobile DVR



Device back view

4CH \$number P 3 G 4 G mobile DVR



Device front view

4CH \$number P 3 G 4 G mobile DVR

LED Indicators



4CH \$number P 3 G 4 G mobile DVR

Back Panel



RCM-Mdr210 parameter table


| Project | Parameters |
|-------------------|--|
| Operating | Linux |
| The language | Chinese/English/Custom |
| Video compression | H. 264 |
| oSD | Covered information, such as the date and time of the vehicle ID |

| | | |
|-------------------------|--------------------------|--|
| Gui | Graphical user interface | Set system parameters using remote control. |
| Video System | Video input | 4CH and $\$number p$ input SD input/mixed video input, Air Plug, 1.0 vice President P, 75 |
| | Video output | CVBs 1ch + 1CH VGA output, 1.0 Vice President, 75, air support, 1CH full screen, 4CH screen |
| | Preview | Supports 1-channel and 4-channel previews. Full screen Preview, manual/Alarm trigger support |
| | of the resolution | $\$number P D1 Hd1 Cif$, Max: Channel 4, $\$number p$ |
| | Video quality | 0-7, Level 0 is the highest level. |
| | Video Standard | Pal: $\$number f$ sec, CCIR625 Line, 50field; NTSC: 120 m/s, line CCIR525, 60field; CIF: $\$number/sec \sim 1.5$ Mbps Video quality level 8, optional; HD1: $\$number/Seconds \sim 2.5$ Mbps, optional video quality level 8; D1:/sec Sham MB, 8 video quality level optional; $\$number P$: 4 mbps-6 Mbps, multilevel selectable video quality |
| | logging mode | By default, automatic recording occurs after opening. Timer record, alarm activation record and Supports manual recording. |
| 's Voice | Audio input | 4CH, Air plug |
| | Audio output | 1ch, Air plug |
| | Compression | G. 726, compressing the speed of 8/seconds |
| Alarm input | | 4CH alarm input, alarm support link type |
| Alarm output | | 1ch Alarm Output |
| Communication interface | | 1ch RS232 or RS485 1CH optional |
| The location of | | Built-in G-Sensor Gps Bod support module, You can play and analyze the route of the vehicle. |
| Wireless transmission | | Supports built-in 3 G 4 G wireless transmission, WCDMA, CDMA2000, Tdd LTE ... |
| Motion detection | | Support motion detection alarm. (You can set the alert duration on the platform after the video recording.) |
| G-Type Sensor | | Support G sensors |
| Storage | Sd | Dual SD card, each maximum $\$number$ GB SD card loop record |
| | Innovation | Support SD card Remote update |
| | File format | H. 264 |
| | The file system | Special FAT32 File System |

| | | |
|---------------------|------------------|--|
| Video playback | Search Video | Search Time record/record type |
| | Play | While promoting maximum 4CH replay/stop/fast/slow |
| | | Supports forward and backward speeds: x 2, x 4, x 8, x 16. |
| Voltage and Power | Power Management | Wide voltage support timed/delayed shutdown |
| | Voltage input | DC: + lve 36V |
| | Energy | normal working Nalt; 14W, standby state Nalt; 0.5 W |
| | The temperature | 20 to + 70 |
| Working environment | Air humidity | 20% to 80% |
| | Password | User/admin Level 2 password |
| Security | The size of | \$number (W) x (h) x138 (d) mm |
| Other | Net | 360g |

Richmor Monitoring GUI

The main menu includes: Search, System setup, Rec setup, Network setup, Alarm setup, Peripheral setup, System Tools, System Information, as below:




Online Software interface

The screenshot shows the 'Mobile monitoring and management platform' interface. The top navigation bar includes 'Welcome to log in', 'System', 'Video', 'Map', 'Playback', 'System Set', 'Log Query', and 'Extend App'. The left sidebar displays a tree view of devices under 'Monitor Center(112)', including 'KY7569' and 'KY7586'. The central area features four video feeds: 1. KY7586 - CH1 - 10 KB/S (interior view), 2. KY7586 - CH2 - 4 KB/S (exterior view), 3. KY7586 - CH3 - 29 KB/S (interior view), and 4. KY7586 - CH4 - 0 KB/S (interior view). The right side shows a map with a vehicle icon and a data popup for 'KY7586' including Time, Mileage, Speed, Position, Status, 3D Card, and Network. The bottom status bar shows 'Running: 00:02:05' and 'Online: 6 / Number of set loss: 4 / Alarms: 0 / Total: 12 / Live Rate: 50.00% / Lost Rate: 33.33%'. A table below the status bar lists device details:

| Device | Positioning Time | Position | Speed | Alarm | Sta |
|--------|---------------------|----------------------|----------------------|-------|------|
| KY7569 | 2015-07-23 11:53:47 | 广西壮族自治区玉林市博白县兴隆中路10号 | 0.00 km/h(West) | | (On) |
| KY7586 | 2015-07-23 11:53:57 | 广西壮族自治区玉林市博白县S216 | 0.00 km/h(Northeast) | | (On) |

Remote Track View 3 G 4 G mobile DVR School Bus Solutions

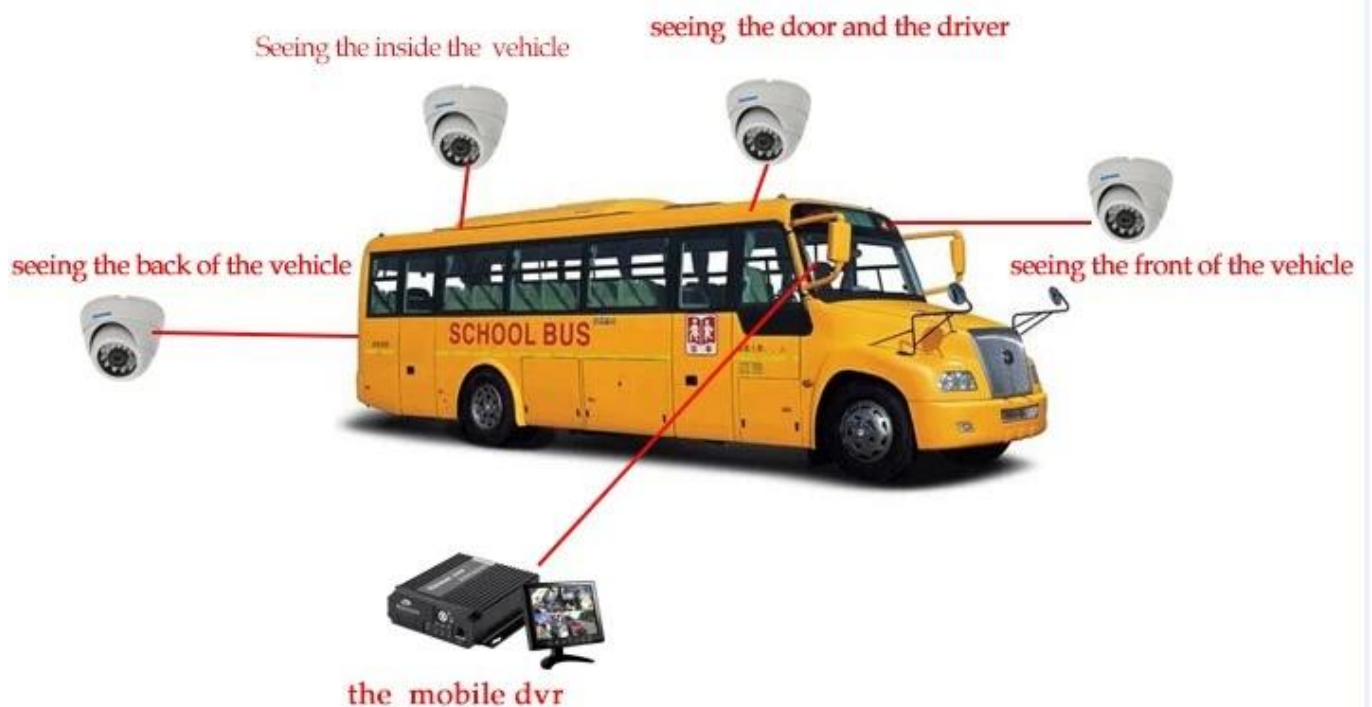

The Professional Mobile DVR Solution For Truck



Professional Mobile DVR Solution for Bus







Application

Widely used in buses, buses, taxis, school buses, trucks, automobiles, buses and other dangerous goods and ships.



Travelling Bus



Public Bus



Dangerous chemical car



Tobacco Logistics



Taxi



Truck



School Bus



Express Logistics



Road Police Car



Border Car



Traffic Inspection Car



Civil Work Vehicle



Escort Vehicle



Ambulance



Fixed place monitor



Ship Monitor

Buy Guides

Packaging

1 equipment, all standard accessories, such as AV cable Jio cable/power cord/key, etc.

Exhibition

Richmor

CPSE2012 in Shenzhen



CPSE2013

10.29-10.31

4 Booth we have

Welcome you !!!



CPSE2012-- Guangdong TV Report-Shenzhen Richmor



About Us \$xmlesc;



Welcome to Contact Jenny If you need more details:

e-mail ID: LoveRseasales.com Rseasales

SkypeTo: RCMCCTVSALES5

Mobile KwatsaPP: + 86-18126263838