4CH FULL D1 AHD vehicle mobile DVR 4ch HDD/Sd card MDVR with 3G/WIFI/GPS,RCM-MDVR7104series



HD Vehicle DVR on sales

| Item | | Parameter |
|-------------------|--------------------------|---|
| OS | | Linux |
| Language | | English/Chinese/Customized |
| Video Compression | | H.264 Compression |
| OSD | | Overlays information such as date time and vehicle ID |
| GUI | Graphical User Interface | Setup system parameters with the remote control. |

| Video Record System | Video Input | 4CH 720P AHD input/SD input/ mixed input,aviation connector, 1.0Vp-p, 75Ω | | | | | |
|----------------------|-----------------------------|---|--|--|--|--|--|
| | Video Output | 2CH CVBS+ VGA output for optional, | | | | | |
| | | 1.0Vp-p, 75Ω,Aviation,Support 1CH Full Screen, 4CH Screen view | | | | | |
| | Preview | Support 1 channel and 4 channels preview., Support Manual/Alarm Trigger full screen preview | | | | | |
| | Resolution | 720P/D1/HD1/CIF, MAX:4 channels 720P and 4 channels D1 | | | | | |
| | Image Quality | 0-7 levels, 0 is the highest level. | | | | | |
| | Video Standard | PAL: 100f/s , CCIR625 line,50field; NTSC: 120f/s, CCIR525 line,60field; CIF: 256Kbps ~ 1.5Mbps, 8 level video quality optional; HD1: 600Kbps ~ 2.5Mbps, 8 level video quality optional; D1: 800Kbps ~ 3Mbps, 8 level video quality optional; | | | | | |
| | Record Mode | 720P: 4Mbps-6Mbps, multi level video quality optional The default setting is auto recording after power on. Timed recording, alarm trigger recording and | | | | | |
| Audio | Audio Input | manual recording are supported. | | | | | |
| Audio | Audio Input Audio Output | 4CH Aviation Plug Input 2CH,headphone connect at front panel, BNC Connect on Back panel | | | | | |
| | Compression | G.726 compression, 8KB/s speed | | | | | |
| Alarm Input | Compression | 7CH Alarm Input,1CH AD Input, | | | | | |
| Alarin input | | impulse speed input, Alarm Linkage | | | | | |
| Alarm Output | | 2CH Alarm Output,Support Light/ Sound alarm sensor,Oil/Power cut off | | | | | |
| Interface | | 3CH RS232, POS/Fuel Sensor/ LED Advertisement Connection | | | | | |
| | | 2CH 485 Interface,Connect PTZ Camera | | | | | |
| | | 2CH CAN interface | | | | | |
| Wireless Transmissio | n | Support Built in 3G transmission, WCDMA, CDMA2000,GPRS, EDGE[] Built in 4G module optional, TDD-LTE, FDD-LTE | | | | | |
| GPS Position | | Support Built GPS/BD Module | | | | | |
| | HDD | Max 2.5" 2TB HDD | | | | | |
| Storage | SD Card | Max 128GB SD Card Mirror Recording Keep Data Safety | | | | | |
| | Update | Support USB Updating, SD Card Updatin, OTA Remote Updating | | | | | |
| | File Format | H.264 | | | | | |
| | File System | Special FAT32 File System | | | | | |
| | USB | USB Interface on Front Panel for data back up by U Disk,Hard Disk | | | | | |
| Record Replay | Video Search | Search By Record Time/Record Type etc | | | | | |
| 2 0 | Playback | Max support 4CH Replay /Stop/Fast/Slow at same time Support forward and backward | | | | | |
| | | play at the speed of: x 2,x4,x8,x16. | | | | | |
| Security | , | User/Admin 2 Level Different Password | | | | | |

| Optional Functions | Voice Call | Support voice call each other | | | | |
|---------------------|------------------|--|--|--|--|--|
| | Serial Expand | Support LED Advertisement Panel[]Oil Sensor[] POS[]Bus Station Broadcaster[] Car OBD,ect.external de ice | | | | |
| Voltage & Power | Power Management | Wide Voltage.Support Timed/Delay off | | | | |
| | Input Voltage | DC:+6V - +36V | | | | |
| | Power | Working []5W | | | | |
| | Temperature | -20°C - +70°C | | | | |
| Working Environment | Humidity | 20% - 80% | | | | |
| | Size | 200 []D[]* 187[]W[]* 62[]H[] mm | | | | |
| Others | Weight | 1.90 Kg | | | | |

Main Features

1. HIS Solution,H.264 Compression,support 4CH 720P AHD input/ 4CH analog standard definition Cam era input/2CH HD + 2CH SD mixed input;

2. 3CH video output (2CH CVBS video, support front&rear panel output; VGA output for optional.)

3. Exclusive pre-

allocate File System protect data completeness, prevent SD Card fragment, ensure date stablely and c ompletely.

4. 8-36V wide voltage with low power consumption.

5. Unique UPS Technology ensures the integrality of record when power failure occurs, even can for 8-10s.

6. HDD+SD Card Storage (Support 2.5" HDD, max 128G SD Card) protect from Shock & Dust damage ;support USB port data backup and device update;

- 7. Support 2 USB interfaces, data backup and device upgrade.
- 8. Support 9CH alarm input (1CH analog input + 8CH IO alarm input), 2CH independent alarm output.
- 9. Support 2 CAN interfaces.
- 10. Support HDD heating functions, can work in harsh environment.
- 11. Support GPS/BD/G-Sensor Extension modul;
- 12. Realize real-time monitor through 3G/4G;
- 13. Support WIFI module, can download data automatically.

14 Support Broadcast/Intercom/Text sent etc;can add oil sensor/temperature sensor/POS/LED Advertis ement Panel;

15. Support SMS remote configure/ control device;

16. OTA(On-The-


Air) Device automatically upgrade function, can upgrade to updated version , maintenance is more co nvenient.

- 17. Support voice call function.
- 18. Support IOS/Android Phone Remote monitor

PC Software interface for gps tracking

| * | | M | obile m | onitoring | and ma | anagement | platform | | | | |
|---|--|----------------|----------------------------|----------------------------|----------------------------|-------------------------------|---------------------|---------------------------|--|--|--|
| 8 Welcome to log in,R | CMTEST System 🖂 | 🔒 Video | 🔗 Мар | 🕰 Playback | 😥 System Set | 📋 Log Query 🔑 E | Extend App | | - 8 × | | |
| Dev List Pollir | | | | | | | | | | | |
| | • • | 1 | 告 € 26562 | - CH1 - 4 KB/S | 2 | 贵 C 26562 - CH2 - : | 36 KB/5 | Address | Search | | |
| ◆ | er(6/12) 5 2 3 32 46 1 7 7 | | | | | | | () +HI | <u>歳田</u> 卫星 変奏 黄C67762 Time:2015-08-11 10:10:19 Speed:0.00 km/h(Northwes | | |
| ● | | 3 | 费C 26562 | - CH3 - 0 KB/S | | 黄C 26562 - CH4 - | 2 KB/S | | Company通复無因(會稱 Position:福建會演州市龙汉 Status:(Online)ACC ON.81 Network signal Normal Network:3G COMPACT ACC ON.81 Network:3G COMPACT ACC ON 81 Network:3G COMPACT ACC ACC ACC ACC ACC ACC ACC ACC ACC | | |
| Status PTZ | | 1 | | 10-0-0 | 1-1 | | 5 6 8 | 欣乐杯 🕑 | | | |
| Device type | MDVR | 1. | | 111 - 1 | | | 1 | | in | | |
| Vehicle Name | 贵C 26562 | and the second | 10 | - Commenter | | 6 | | u - | · · · · · · · · · · · · · · · · · · · | | |
| Vehicle ID | 80088 | | 2\3\4/ | | | | | | A. C. | | |
| Company | 遵义县万发出租运输有限公 | | | | | E.e.e | art 🔽 Auto Sort | | | | |
| Their Group | Monitor Center | Monitor:1 Or | line:1 Alarm:0 Offline:0 : | Idling:0 ACC OFF:0 GPS Inv | alid:0 | Expo | Auto Sort | | | | |
| Status | Online | Device | Positioning Time | Position | | Speed | Alarm | Sta | | | |
| Positioning Time | 2015-08-11 10:10:22 | 贵C87762 | 2015-08-11 10:10:19 | 福建省漳州市龙文区G7 | 6(厦蓉高速公路) | 0.00 km/h(Northwe | st) | (On | | | |
| Location | 贵州省遵义市红花岗区春天 | | | | | | | | 点我加速 | | |
| Speed | 13.70 km/h(South) | | | | | | | | 0.2 | | |
| Costs | Normal | | | | | | | 100 米 | r (• 😽 | | |
| | | < > Hon | itoring Alarm Info | metion System Event | / | | | © 2015 Baidu - Data © Nav | Info & CenNavi & 道道道通 | | |
| | Running: | 00:02:02 | and the second second | unduni Online:5 / Numbe | r of set loss:5 / Arrears: | 0 / Total:12 Line Rate:41.67% | /Lost Rate:41.67% 💟 | | 0 | | |

Android/IOS APP Monitor

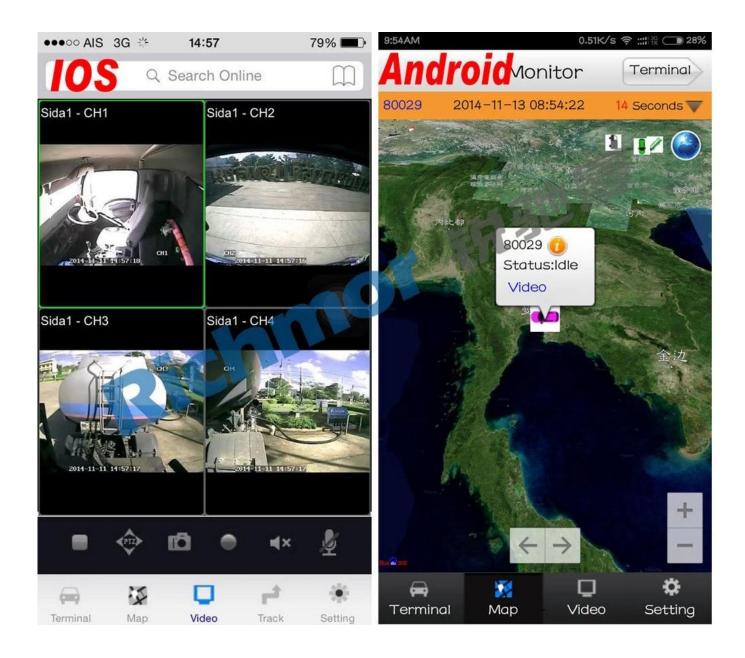

Server software interface

| Vehicle Manage | ment Syst | em | | | | | Welcome! | 销售客户 Manage: | r Exit |
|----------------------|-------------|--------------------|-------------------|---------------------|-------------------|-------------------------|---------------------|-----------------|----------|
| _ | Report | Device | User | | | | | | |
| | | age Summary | | | | | | | |
| Report | Begin Time: | 2016-01-08 00:00:0 | 0 📖 то: 2016-01-0 | 8 16:27:09 🔤 | | | | | |
| Quick Report 🗧 | Device: All | Devices 👻 | | | | | | | |
| Bileage Summary | ∎ileage S | unnary | | | | | | | |
| Mileage Daily | Index | Vehicle | Total Mileage(KM) | Begin Time | Start Mileage(KM) | Start Position | End Time | End Mileage(KM) | |
| Track Detail | 1 | 粤EX3114 | 174.88 | 2016-01-08 09:03:32 | 22.95 | 22. 534264, 114. 006444 | 2016-01-08 16:25:41 | 157.83 | |
| Speed Report (| 2 | 粤EX3130 | 202.07 | 2016-01-08 07:33:17 | 18.1 | 22.884299,112.892602 | 2016-01-08 16:25:28 | 171.57 | |
| Online Summary (| 3 | 24012 | 277.42 | 2016-01-08 07:09:55 | 23.41 | 23. 369562, 116. 675227 | 2016-01-08 14:57:24 | 300.83 | |
| IO Alarm Report (| 4 | 翼A76248 | 97.4 | 2016-01-08 00:00:25 | 299.97 | 41.572469,118.786245 | 2016-01-08 09:42:39 | 41.09 | |
| Alarm Report | 5 | 24023 | 0 | 2016-01-08 00:00:07 | 16.26 | 37, 758759, 120, 731127 | 2016-01-08 16:19:07 | 16.26 | |
| | 6 | 鲁QW5387 | 416.36 | 2016-01-08 06:09:54 | 96.66 | 35. 461432, 117. 643793 | 2016-01-08 16:20:11 | 92.83 | |
| Storage Report (| 7 | 鲁J81712 | 120.98 | 2016-01-08 04:48:40 | 26.51 | 35. 876478, 117. 681941 | 2016-01-08 14:25:07 | 144.92 | |
| Upgrade Report (| 8 | 粤HG5250 | 45.81 | 2016-01-08 00:00:03 | 139.13 | 22.654394,112.498593 | 2016-01-08 16:15:15 | 115.82 | |
| Fuel Report (| 9 | 粤HG5153 | 40.61 | 2016-01-08 00:00:27 | 92 | 22.654197, 112.497665 | 2016-01-08 16:11:28 | 73.72 | |
| Park Report (| 10 | 粤HG5368 | 111.72 | 2016-01-08 00:00:15 | 145.61 | 22.654321,112.498645 | 2016-01-08 16:24:48 | 93.9 | |
| Geo Fencing Report (| 11 | 粤HG5010 | 52.02 | 2016-01-08 00:00:10 | 93.24 | 22. 654234, 112. 497795 | 2016-01-08 16:15:55 | 57.92 | |
| 3G Flow Report | 12 | 鲁AA3683 | 655.08 | 2016-01-08 00:00:29 | 354.36 | 35, 950643, 117, 659700 | 2016-01-08 16:24:44 | 1009.74 | |
| | 13 | 24058 | 224.42 | 2016-01-08 07:00:58 | 44.57 | 37. 949788, 118. 844070 | 2016-01-08 16:17:34 | 60.4 | |
| Extend Report (| 14 | 28999 | 2.36 | 2016-01-08 13:13:09 | 17.6 | 28. 734420, 121. 235847 | 2016-01-08 13:57:27 | 19.81 | |
| Dispatch Report 🛛 💭 | 15 | 01568 | 369.29 | 2016-01-08 00:00:54 | 51.04 | 33.733305,115.868921 | 2016-01-08 16:03:58 | 420.33 | |

Application



Good Relationship with our Customers



Contact : Amily Email: overseasales-2@rcmcctv.com Skype: rcmcctvsales2 QQ: 23557/8097 MB: +86 18929314790