# MAX 4ch 1080P and input camera for gps 3g monitor mobile dvr application support fuel sensor RFID



#### 功能特点 Features



#### product specification:


Item		parameter
Operating System		Linux
Language		English/chinese/customized
Video Compression		H.264 Compression
OSD		overlays information such as date time and vehicle ID
GUI	Graphical user interface	setup system parameters with the remote control

Video Record System	video input	4CH 960P/720P AHD input,aviation connector, 1.0Vp-p, 75Ω
	video output	1 CVBS, 1.0Vp-p, 75 $\Omega$ ,Aviation,Support 1CH Full Screen,4CH Screen view
	preview	Support 1 channel and 4 channels preview., Support Manual/Alarm Trigger full screen preview
	resolution	720P/D1/HD1/CIF, MAX:4 channels of 720P and 4 channels of D1
	image quality	1-4 levels, 1 is the highest level.
	video standard	PAL: 100f/s , CCIR625 line,50field; NTSC: 120f/s, CCIR525 line,60field; CIF: 256Kbps ~ 1.5Mbps, 8 level video quality optional; HD1: 600Kbps ~ 2.5Mbps, 8 level video quality optional; D1: 800Kbps ~ 3Mbps, 8 level video quality optional; 720P: 4Mbps-6Mbps, multi level video quality optional
	record mode	The default setting is auto recording after power on. Timed recording, alarm trigger recording and manual recording are supported.
	audio input	4CH Aviation Plug Input
Audio	audio output	2CH,headphone connect at front panel, BNC Connect on Back panel
	compression	G.726 compression, 8KB/s speed
Alarm Input		7CH Alarm Input,1CH AD Input,impulse speed input,Alarm Linkage
Alarm Output		2CH Alarm Output, Support Light/Sound alarm sensor, Oil/Power cut off
Interface		3CH RS232, POS/Fuel Sensor/LED Advertisement Connection
		1CH 485 Interface,Connect PTZ Camera
Wireless Transmission		Support Built in 3G transmission,, WCDMA, CDMA2000,GPRS, EDGE; Built in 4G module optional, TDD-LTE, FDD-LTE
GPS Position		Support Built GPS/BD Module
	HDD	Max 2.5" 1TB HDD
	SD Card	Max 128GB SD Card Mirror Recording Keep Data Safety
Storage	update	Support USB Updating, SD Card Updating,OTA Remote Updating
	file format	H.264
	file system	Special FAT32 File System
	USB	USB Interface on Front Panel for data back up by U Disk,Hard Disk
December 1	video search	Search By Record Time/Record Type etc
Record Replay	playback	Max support 4CH Replay /Stop/Fast/Slow at same time
	<u> </u>	Support forward and backward play at the speed of: x 2,x4,x8,x16.  User/Admin 2 Level Different Password
Securit	voice call	Support voice call each other
Optional Functions	TTS Voice broadcast	Support TTS voice broadcast function.
	serial expand	Support LED Advertisement Panel,Oil Sensor, POS,Bus Station Broadcaster,Car OBD,ect.external device
Voltage & Power	Power Management	Wide Voltage.Support Timed/Delay off
	Input Voltage	DC:+6V - +36V
	Output Voltage	+12V~1.5A,+5V~1.5A
	Power	Working<5W
Working Environment	Temperature	-20°C - +70°C
	Humidity	20% - 80%
Others	Size	200 (D)* 187(W)* 62(H) mm
	Weight	1.90Kg

## **Product Show:**






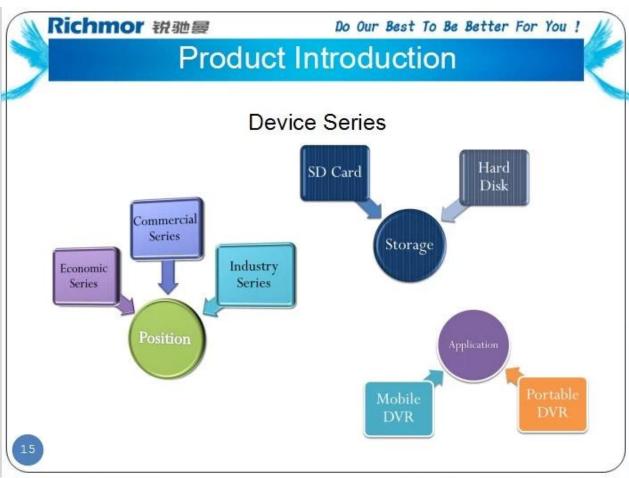




Client User Graph Interface

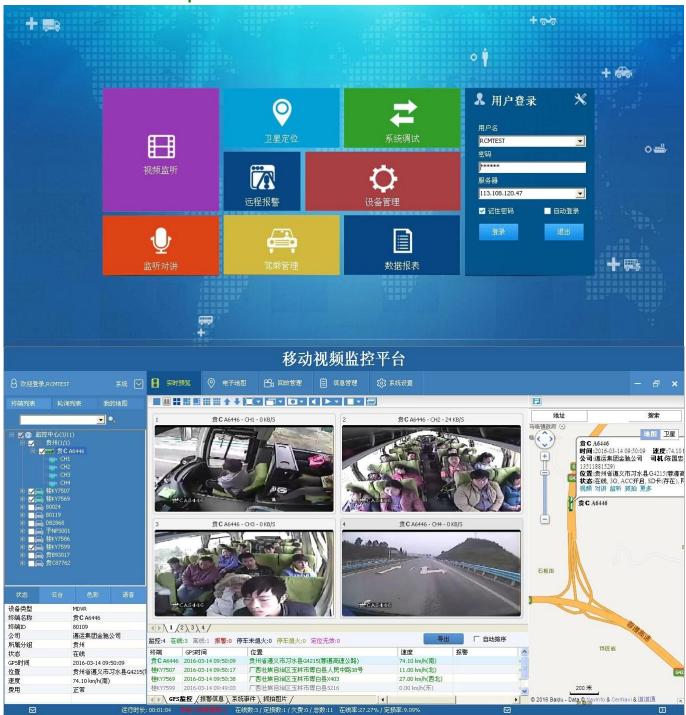

our mdvr support mobile Client monitoring like PC, mobile phone etc.

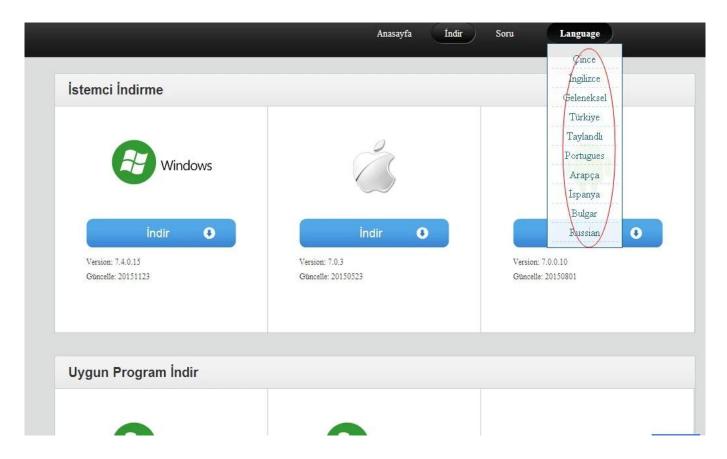

**Appliacation** 

## **FUNCTIONS**

- Video& Audio real-time monitoring
- Online Vehicle Status
- Satellite Map
- GPS
- Video Storage
- Tracking Display
- Intercom
- Fuel Sensor
- G-Sensor
- Temperature-Sensor



certificate





company and factory
















OEM & ODM Service
Brasil World Cup Supplier



Exhibition:



#### CPSE2012 in Shenzhen

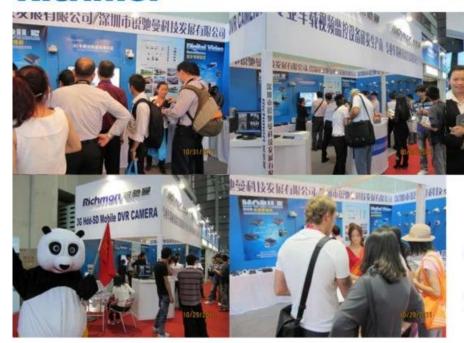

CPSE2013 10.29-10.31 4 Booth we have

Welcome you !!!



### CPSE2012-- Guangdong TV Report-Shenzhen Richmor



Best Regards Amily Zhang

#### HAND US YOUR TRUST, OFFER YOU OUR BEST!!!

Shenzhen Richmor Technology Development Co.,LTD

overseasales-2@rcmcctv.com Email:

Skype: rcmcctvsales2 2355778097 QQ:

MB/Whatsapp: +86 18929314790 Website: http://www.richmor.net/

ADD: 6th Floor, F Building, Xinzhi Industrial Park, Yangmei, Bantian, Longgang, Shenzhen

