Richmor Portable Video Recorder with 3G GPS WIFI For Brasil World Cup

RCM-SP5800

Richmor Portable Video Recorder Advantage


- 1.3G GPS WIFI G-sensor TF Card Portable DVR;
- 2.SOS Button for Alarm Recording;
- 3. Picture snap button;
- 4.PTT Function, device and device communication;
- 5.Intercom Function, officer and police communication;
- 6.8 Hours working time

Picture



| Parameter | | |
|-----------|-----------------------------|--|
| Items | Device parameters | Performance index |
| System | Operation system | Linux |
| | Separate design | Main device: work independently to realize local record Auxiliary device: GPS / 3G, backup battery |
| | Graphic operation interface | Use buttons to complete the setting of various parameters |
| | Security management | User password management |

| | Video input | Built-in camera lens, angle of visibility: 70°, CMOS sensor |
|----------------------|-----------------------|---|
| | OSD | Time & date, device ID, GPS, etc. |
| | Compression | H.264. Hisilicon high performance processor is adopted. |
| Video | Video resolution | VGA by default, QVGA optional |
| Video | Video Bit rate QVGA | QVGA: 400Kbps ~ 1.5Mbps, 4 levels of bit rate optional |
| | Video Bit rate VGA | VGA: 1000kbps ~ 2Mbps, 4 levels of bit rate optional |
| | Preview function | Real time, record video preview |
| | Dual stream | Support |
| | Audio input | Built-in MIC |
| Audio | Audio output | Built-in speaker, >1W |
| | Compression | G.726 |
| | Storage media | Micro-SD card, support 1G ~ 32G |
| | File format/system | ASF record file format, FAT32 file system |
| Dogording | Recording mode | Startup recording by default, support manual recording |
| Recording | Recording search | Search recording video files by time, type, etc. |
| | Recording Playback | Support fast forward, fast backward, play, pause, support 2, 4, 8, 16 times speed fast forward or fast backward, support playback of file by time |
| USB Interface | Host Access | Can Expand One For USB Disk Backup |
| Network interface | Wireless transmission | Built-in 3G wireless transmission module, WCDMA, CDMA2000, TD-SCDMA system optional; Compatible with GPRS, EDGE; |
| Extend Interface | Intercom | Can Expand Intercom Module Inside |
| Screen | Size | 2.4 inch |
| parameters | Type | TFT |
| parameters | Resolution | 480*234 |
| Upgrade | System upgrade | Support Micro-SD card upgrade |
| Working | Temperature | -20°C ~ +50°C |
| environment | Humidity | 20% to 80% |
| Dimension | Main device | 50(W) x90(H) x28(D) mm |
| ווופוופווחוו | Auxiliary device | 70(W) x110(H) x28(D) mm |
| Moight | Main device | Net weight: 95g, Gross weight: 307.5g |
| Weight | Auxiliary device | Net weight: 238g, Gross weight: 352g |

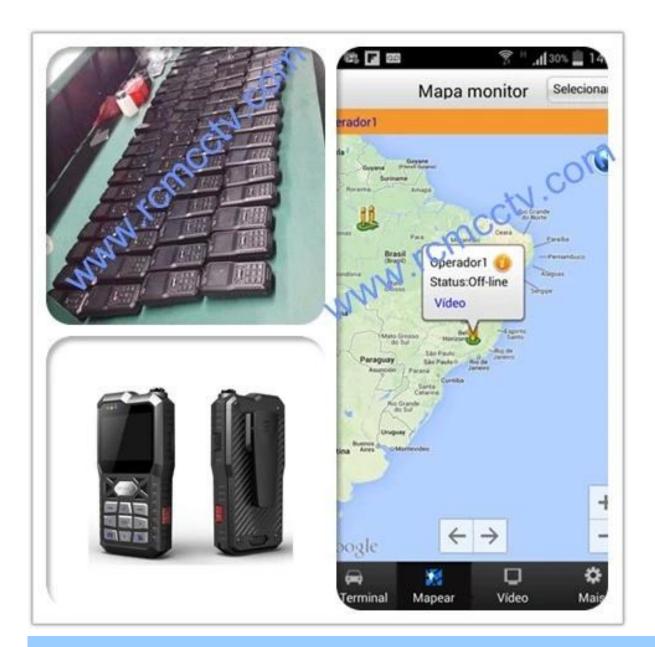

Package



Richmor Brand Package

Standard Package

Certification





Customer Visit