Public bus solution 4ch 2tb hdd mobile mdvr support mobile phone remote monitor and pc monitor







| Item                |                          | Parameter  |
|---------------------|--------------------------|--|
| OS                  |                          | Linux  |
| Language            |                          | English/Chinese/Customized   |
| Video Compression   |                          | H.264 Compression  |
| OSD                 |                          | Overlays information such as date time and vehicle ID  |
| GUI                 | Graphical User Interface | Setup system parameters with the remote control.   |
| Video Record System | Video Input              | 4CH 720P AHD input/SD input/mixed input, aviation connector, 1.0Vp-p, $75\Omega$   |
|                     | Video Output             | 2CH CVBS+ VGA output for optional,<br>1.0Vp-p, 75Ω,Aviation,Support 1CH Full Screen,<br>4CH Screen view  |
|                     | Preview                  | Support 1 channel and 4 channels preview.,<br>Support Manual/Alarm Trigger full screen preview   |
|                     | Resolution               | 720P/D1/HD1/CIF,<br>MAX:4 channels 720P and 4 channels D1  |
|                     | Image Quality            | 0-7 levels, 0 is the highest level.  |
|                     | Video Standard           | PAL: 100f/s , CCIR625 line,50field; NTSC: 120f/s, CCIR525 line,60field; CIF: 256Kbps ~ 1.5Mbps, 8 level video quality optional; HD1: 600Kbps ~ 2.5Mbps, 8 level video quality optional; D1: 800Kbps ~ 3Mbps, 8 level video quality optional; 720P: 4Mbps-6Mbps, multi level video quality optional |
|                     | Record Mode              | The default setting is auto recording after power on. Timed recording, alarm trigger recording and manual recording are supported.   |

| Audio Input                           | 4CH Aviation Plug Input  |
|---------------------------------------|--|
| Audio Output                          | 2CH,headphone connect at front panel,  |
|                                       | BNC Connect on Back panel  |
| Compression                           | G.726 compression, 8KB/s speed   |
|                                       | 7CH Alarm Input,1CH AD Input,  |
|                                       | impulse speed input,Alarm Linkage  |
|                                       | 2CH Alarm Output, Support Light/   |
|                                       | Sound alarm sensor,Oil/Power cut off   |
|                                       | 3CH RS232, POS/Fuel Sensor/  |
|                                       | LED Advertisement Connection   |
|                                       | 2CH 485 Interface, Connect PTZ Camera  |
|                                       | 2CH CAN interface  |
| n                                     | Support Built in 3G transmission,  |
|                                       | WCDMA, CDMA2000,GPRS, EDGE□  |
|                                       | Built in 4G module optional, TDD-LTE, FDD-LTE  |
|                                       | Support Built GPS/BD Module  |
|                                       | Max 2.5" 2TB HDD   |
| SD Card                               | Max 128GB SD Card Mirror Recording Keep Data Safety  |
| Update                                | Support USB Updating, SD Card Updatin,<br>OTA Remote Updating                                |
| File Format                           | H.264  |
|                                       | Special FAT32 File System  |
| · · · · · · · · · · · · · · · · · · · | USB Interface on Front Panel for   |
| COD                                   | data back up by U Disk,Hard Disk   |
| Video Search                          | Search By Record Time/Record Type etc  |
| Playback                              | Max support 4CH Replay /Stop/Fast/Slow at same time  |
|                                       | Support forward and backward   |
|                                       | play at the speed of: x 2,x4,x8,x16.   |
|                                       | User/Admin 2 Level Different Password  |
|                                       | Support voice call each other  |
| Serial Expand                         | Support LED Advertisement Panel Oil Sensor   |
|                                       | POS[Bus Station Broadcaster[] Car OBD,ect.external dev                                       |
| Power Management                      | Wide Voltage.Support Timed/Delay off   |
|                                       | DC:+6V - +36V  |
| <u> </u>                              | Working ∏5W  |
|                                       | -20°C - +70°C  |
|                                       | 20% - 80%  |
| -                                     |  |
| Size                                  | 200 □D□* 187□W□* 62□H□ mm  |
|                                       |  |
|                                       | Audio Output  Compression  HDD  SD Card  Update  File Format  File System  USB  Video Search |

# **Main Features**

1. HIS Solution, H.264 Compression, support 4CH 720P AHD input/ 4CH analog standard definition Camera input/2CH HD  $\pm$  2CH SD mixed input;

- 2. 3CH video output (2CH CVBS video, support front&rear panel output; VGA output for optional.)
- 3. Exclusive pre-

allocate File System protect data completeness, prevent SD Card fragment, ensure date stablely and c ompletely.

- 4. 8-36V wide voltage with low power consumption.
- 5. Unique UPS Technology ensures the integrality of record when power failure occurs, even can for 8-10s.
- 6. HDD+SD Card Storage (Support 2.5" HDD, max 128G SD Card) protect from Shock & Dust damage ;support USB port data backup and device update;
- 7. Support 2 USB interfaces, data backup and device upgrade.
- 8. Support 9CH alarm input (1CH analog input + 8CH IO alarm input ), 2CH independent alarm output.
- 9. Support 2 CAN interfaces.
- 10. Support HDD heating functions, can work in harsh environment.
- 11. Support GPS/BD/G-Sensor Extension modul;
- 12. Realize real-time monitor through 3G/4G;
- 13. Support WIFI module, can download data automatically.
- 14 Support Broadcast/Intercom/Text sent etc;can add oil sensor/temperature sensor/POS/LED Advertis ement Panel;
- 15. Support SMS remote configure/ control device;
- 16. OTA(On-The-
- Air) Device automatically upgrade function, can upgrade to updated version, maintenance is more convenient.
- 17. Support voice call function.
- 18. Support IOS/Android Phone Remote monitor


### PC Software interface for gps tracking



### **Android/IOS APP Monitor**



#### Server software interface

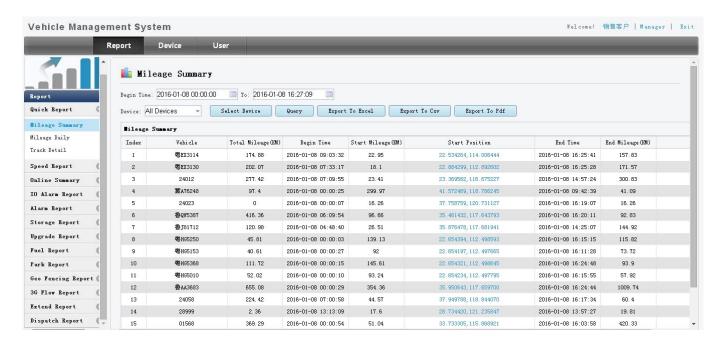

# **Application**



# **Good Relationship with our Customers**









For more information pls feel free to contact Amily:

**Email:** overseasales-2@rcmcctv.com

**Skype:** rcmcctvsales2

QQ: 2355778097

**MB/whatsapp:** +86 18929314790