SD card/HDD mdvr D1/720P/1080P 4/5/8CH vehicle mobile dvr with GPS 3G/4G/WIFI optional,car vehicle camera and monitor

Shenzhen Richmor Science&Technologies Development Co.,Ltd



Richmor

WE PUT FORWARD THE IDEAL OF "4M" IN ENTERPRISE MANAGEMENT:

More enhancements of product quality everyday.

More progress of services and sales everyday,

More widely the effect of our brand expands everyday,

More smiles to each of us everyday.

product specification:


Item		parameter
Operating System		Linux
Language		English/chinese/customized
Video Compres	sion	H.264 Compression
OSD		overlays information such as date time and vehicle ID
GUI	Graphical user interface	setup system parameters with the remote control
	video input	4CH 960P/720P AHD input,aviation connector, 1.0Vp-p, 75Ω
	video output	1 CVBS, 1.0Vp-p, 75Ω, Aviation, Support 1CH Full Screen, 4CH Screen view
	preview	Support 1 channel and 4 channels preview., Support Manual/Alarm Trigger full screen preview
	resolution	720P/D1/HD1/CIF, MAX:4 channels of 720P and 4 channels of D1
Video Record System	image quality	1-4 levels, 1 is the highest level.
	video standard	PAL: 100f/s, CCIR625 line,50field; NTSC: 120f/s, CCIR525 line,60field; CIF: 256Kbps ~ 1.5Mbps, 8 level video quality optional; HD1: 600Kbps ~ 2.5Mbps, 8 level video quality optional; D1: 800Kbps ~ 3Mbps, 8 level video quality optional; 720P: 4Mbps-6Mbps, multi level video quality optional
	record mode	The default setting is auto recording after power on. Timed recording, alarm trigger recording and manual recording are supported.
	audio input	4CH Aviation Plug Input
Audio	audio output	2CH, headphone connect at front panel, BNC Connect on Back panel
	compression	G.726 compression, 8KB/s speed

Alarm Input		7CH Alarm Input,1CH AD Input,impulse speed input,Alarm Linkage	
Alarm Output		2CH Alarm Output, Support Light/Sound alarm sensor, Oil/Power cut off	
Interface		3CH RS232, POS/Fuel Sensor/LED Advertisement Connection	
Interface		1CH 485 Interface, Connect PTZ Camera	
Alarm Output2CH Alarm Output, Support Light/Sound alarm sensor, 3CH RS232, POS/Fuel Sensor/LED Advertisement Con 1CH 485 Interface, Connect PTZ CameraWireless TransmissionSupport Built in 3G transmission,, WCDMA, CDMA200 Built in 4G module optional, TDD-LTE, FDD-LTEGPS PositionSupport Built GPS/BD ModuleHDDMax 2.5" 1TB HDDStorageHDDMax 128GB SD Card Mirror Recording Keep Data Safe updateupdateSupport USB Updating, SD Card Updating,OTA Remot file formatH.264File systemgescarchSeearch By Record Time/Record Type etcRecord Replayvideo searchSecurityUser/Admin 2 Level Different PasswordOptionalTTS Voice broadcastFunctionsserial expandSupport LED Advertisement Panel,Oil Sensor, POS,Bus Station Broadcaster,Car OBD,ect.external de PowerVoltage & PowerPower ManagementWorking EnvironmentTemperature-20°C - +70°CAnneSize200 (D)* 187(W)* 62(H) mm	Support Built in 3G transmission,, WCDMA, CDMA2000,GPRS, EDGE; Built in 4G module optional, TDD-LTE, FDD-LTE		
GPS Position		Support Built GPS/BD Module	
	HDD	Max 2.5" 1TB HDD	
	SD Card	Max 128GB SD Card Mirror Recording Keep Data Safety	
Ctorogo	update	Support USB Updating, SD Card Updating,OTA Remote Updating	
Storage	file format	H.264	
	file system	Special FAT32 File System	
	USB	USB Interface on Front Panel for data back up by U Disk,Hard Disk	
	video search	Search By Record Time/Record Type etc	
Record Replay	playback	Max support 4CH Replay /Stop/Fast/Slow at same time	
		Support forward and backward play at the speed of: x 2,x4,x8,x16.	
Securi	ty	User/Admin 2 Level Different Password	
	voice call	Support voice call each other	
Optional	TTS Voice broadcast	Support TTS voice broadcast function.	
Functions	serial expand	Support LED Advertisement Panel,Oil Sensor, POS,Bus Station Broadcaster,Car OBD,ect.external device	
	Power Management	Wide Voltage.Support Timed/Delay off	
Valtage C Dewer	Input Voltage	Support forward and backward play at the speed of: x 2,x4,x8,x16.User/Admin 2 Level Different PasswordSupport voice call each otherSupport TTS voice broadcast function.Support LED Advertisement Panel,Oil Sensor, POS,Bus Station Broadcaster,Car OBD,ect.external deviceWide Voltage.Support Timed/Delay offDC:+6V - +36V +12V~1.5A,+5V~1.5A	
Voltage & Power	Output Voltage	+12V~1.5A,+5V~1.5A	
	Power	Working<5W	
Working	Temperature	-20°C - +70°C	
Environment	Humidity	20% - 80%	
Othors	Size	200 (D)* 187(W)* 62(H) mm	
oulers	AyMax support 4CH Replay /Stop/Fast/Slow at sam Support forward and backward play at the speeecurityUser/Admin 2 Level Different Passwordvoice callSupport voice call each otherTTS Voice broadcastSupport TTS voice broadcast function.serial expandSupport LED Advertisement Panel,Oil Sensor, POS,Bus Station Broadcaster,Car OBD,ect.exterPower ManagementWide Voltage.Support Timed/Delay offInput VoltageDC:+6V - +36VOutput Voltage+12V~1.5A,+5V~1.5APowerWorking<5W	1.90Kg	


Product Show:






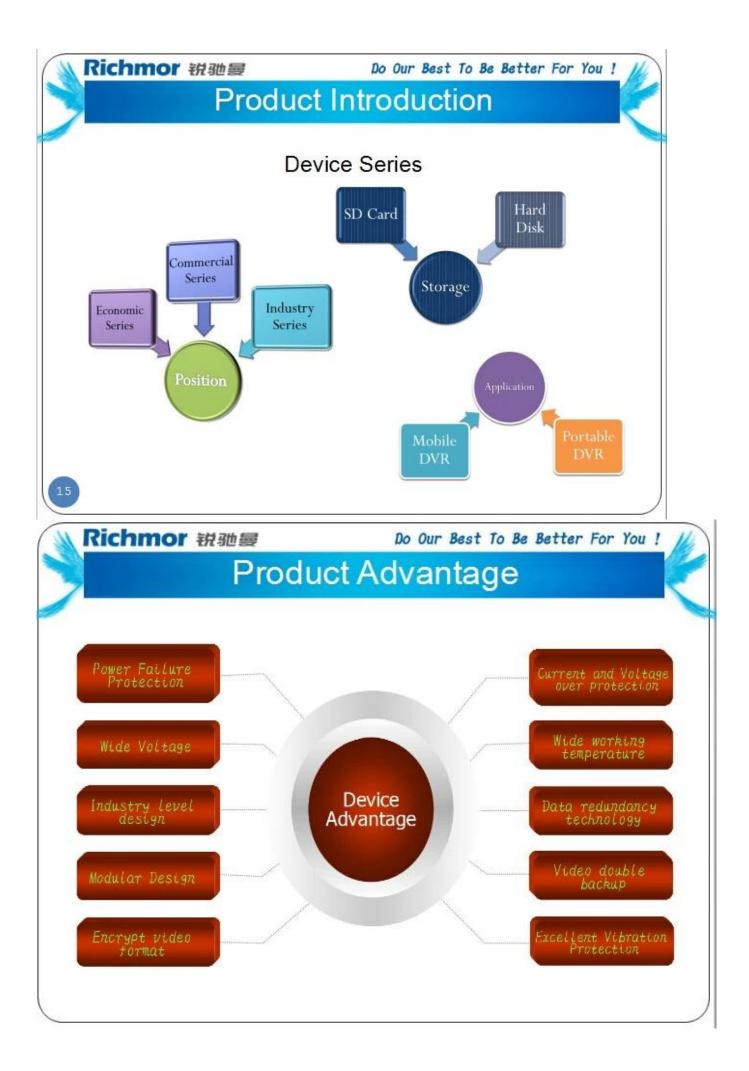

Client User Graph Interface

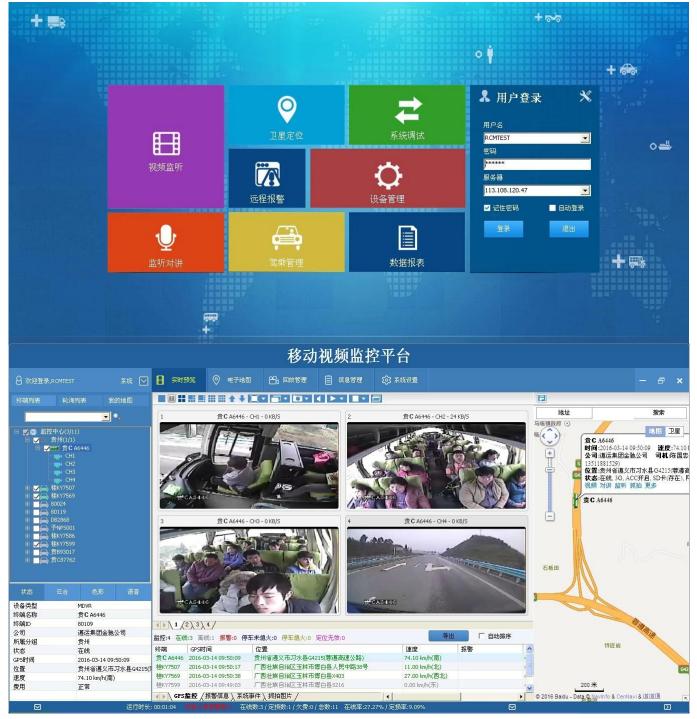

our mdvr support mobile Client monitoring like PC, mobile phone etc.

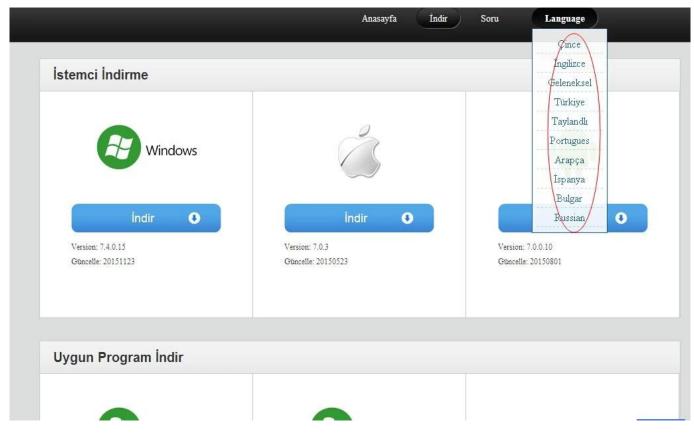

Appliacation

FUNCTIONS

- Video& Audio real-time monitoring
- Online Vehicle Status
- Satellite Map
- GPS
- Video Storage
- Tracking Display
- Intercom
- Fuel Sensor
- G-Sensor
- Temperature-Sensor



certificate



company and factory






Richmor OEM & ODM Service Brasil World Cup Supplier



Exhibition:

Richmor

CPSE2012 in Shenzhen

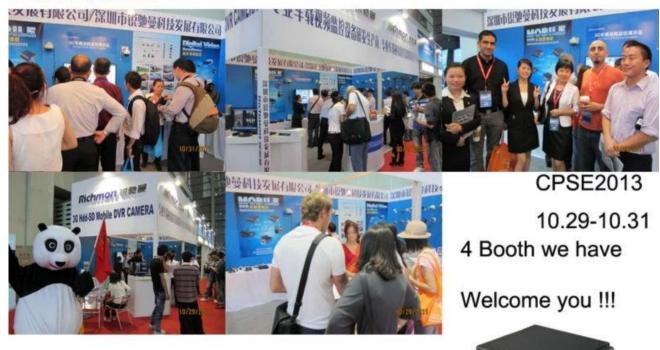

CPSE2012-- Guangdong TV Report-Shenzhen Richmor



Other kinds of products



If u r interested in our dvr, pls contact Amily: whatsapp--18929314790

系统配套产品 VEHICLE CAMERA PARAMETER

车载红外半球摄像机 Vehicle Dome IR Camera



RCM-D342S/IR	1/3" SONY CCD 420TVL 0.5LUX 24 units ¢5 LED or 10 Units ¢8 LED	3.6mm/6mm
RCM-D442A/IR	1/4" Sharp CCD 420TVL 0.5LUX 24 Units ©5 LED or 10 units ©8 LED	2.8mm/3.6mm
RCM-D348S/IR	1/3" SONY CCD 480TVL 0.1LUX 24 Units ©5 LED or 10 units ©8 LED	3.6mm/6mm
RCM-D354S/IR	1/3" SONY CCD 540TVL 0.1LUX 24 Units ©5 LED or 10 Units ©8 LED	3.6mm/6mm
RCM-D360S/IR	1/3* SONY CCD 600TVL 0.1LUX 24 Units ©5 LED or 10 Units ©8 LED	3.6mm/6mm
RCM-D370S/IR	1/3" SONY CCD 700TVL 0.1LUX 24 Units ©5 LED or 10 Units ©8 LED	3.6mm/6mm

车载红外防水摄像机 Vehicle IR Waterproof Camera



proor Gamera		
RCM-CM442A/IR	1/4" Sharp CCD 420TVL 0.5LUX 20 Units © 5 LED (Work Under water)	3.6mm/6mm
RCM-CM342S/IR	1/3" SONY CCD 420TVL 0.1LUX 20 Units © 5 LED (Work under Water)	3.6mm/6mm
RCM-CM348S/IR	1/3" SONY CCD 480TVL 0.1LUX 20 Units ¢ 5 LED (Work Under Water)	3.6mm/6mm
RCM-CM360S/IR	1/3" SONY CCD 600TVL 0.1LUX 20 Units © 5 LED (Work Under Water)	3.6mm/6mm





Best Regards Amily Zhang

HAND US YOUR TRUST, OFFER YOU OUR BEST!!! Shenzhen Richmor Technology Development Co.,LTD

Email: <u>overseasales-2@rcmcctv.com</u> Skype: rcmcctvsales2 QQ: 2355778097 MB/Whatsapp: +86 18929314790 Website: http://www.richmor.net/ ADD: 6th Floor, F Building, Xinzhi Industrial Park, Yangmei,Bantian,Longgang, Shenzhen

