
BK6 Mini size (just bigger than a Camera), portable with cheap transportation. Powerful function, High integration. Support3G/4G, GPS,WIFI, G-Sensor, Talkback, TTS...function. Easy installation.





Mini Modular Million AHD Dual SD Card 2CH 1080P Mobile DVR 3G 4G WIFI AP for taxi

BK6 Mini size (just bigger than a Camera), portable with cheap transportation. Powerful function, High integration. Support3G/4G, GPS,WIFI, G-Sensor, Talkback, TTS...function. Easy installation.



Display Modular Design Fast Maintenance, Low Maintenance Cost




BK6 Mini size (just bigger than a Camera), portable with cheap transportation. Powerful function, High integration. Support3G/4G, GPS,WIFI, G-Sensor, Talkback, TTS...function. Easy installation.



Cabin View Camera

Support Infrared Night Vision Function

Monitoring angles can be adjusted (45° vertical direction & 335° horizontal direction adjusting). Horizontal field of view can reach 150° . Angles cannot be adjusted after installation finished in order that the monitoring site cannot be destroyed.

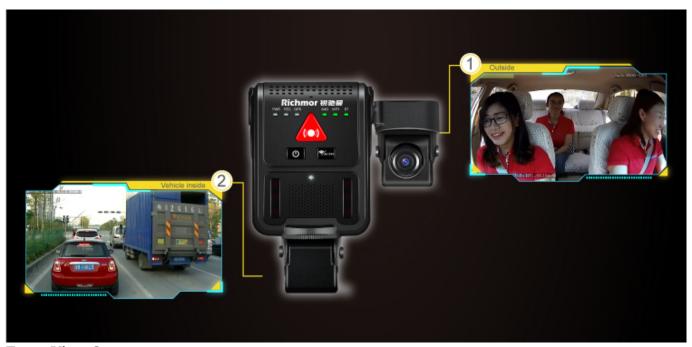


Front View Camera

Front view camera can adjust 45°up and down . Horizontal field of view can reach 130°. Angles cannot be adjusted after installation finished in order that the monitoring site cannot be destroyed.





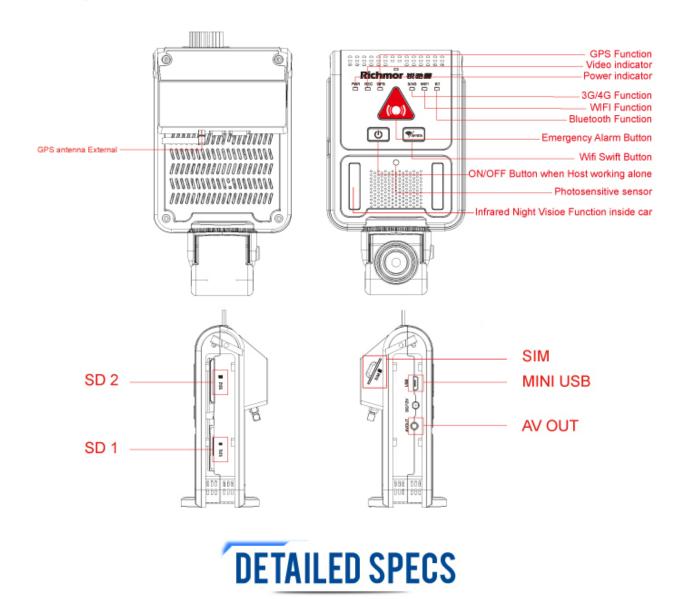

Detailed specification was listed as follows for checking, please contact us we'll do our best to cooperate.

Item	Parameter
os	Linux
Language	Chinese/English/Others(can be customized)
Video Compression	H.264
Operation Interface	OSD menu

Video	Video Input	Support 2 CH(1 CH built-in ,1 CH External) 1080P/720P	
Record		AHD Video Input	
System	Video Output	1CH AV output	
	Display	Support 1/2/4 CH full screen preview	
	Signal system	PAL/NTSC (PAL @100Frame, NTSC@120 Frame	
	Resolution	Support 1080P/720P/D1/CIF, MAX:2CH 1080P	
	Record Format	Synchronized A/V recording	
Audio	Audio Input	2 CH(1 CH built-in ,1CH External)	
	Compression	G.726	
Alarm	Input	4CH level Alarm Input	
	Output	1 CH	
Storage		Max support 2X128GB SD Card	
Communication Port		1CH RS232 / 1CH RS485	
G-sensor		Built in, support 3 Axis Motion Detection with user set ranges , for X,Y and Z coordinates	
Wireless communications		GPS /3G /4G /WIFI optional	
GPS		GPS /Glonass	
Video Playback	Video Search	Search video by Record Time/ Type etc	
	Playback	A/V,GPS,Mapview,Speed,G-sensor,video files available for playback on PC.	
	CMS	Wireless(require Wi-Fi or cellular), real-time monitoring .GPS and alarm etc	
Operating Voltage	Voltage Input	8V ~ 36V DC	
	Voltage Output	12V @1.2A 4 CH, with IR	
	Power -off Protection	All video information can be saved automatically when the power cut off, and make sure that all the files can not be damaged	
	UPS	External UPS battery optional, support 24 hours monitoring	
Other	Operation Temperature	- 20°C ~ + 70°C	
	Humidity	20% ~ 80%	
	Dimension	150*125*45mm	
	Weight	0.5 KG	



Mobile Monitoring Management Platform



RMVS is a system of centralized management and monitoring of all kinds of vehicles based on wireless network. Perform real-time monitoring, GPS/BD positioning, video storage, vehicle scheduling, alarm and alarm, etc.