# especificação do produto:

## Parameter Sheet

| Item | | Parameter |
|---|---|---|
| OS | | Linux |
| Language | | Chinese/English/Customized |
| Video Compression | | H.264 |
| OSD | | Overlays information such as date time and vehicle ID |
| GUI | Graphical User Interface | Setup system parameters with the remote control. |
| Video Record System | Video Input | 4CH 720P AHD input/SD input/mixed video input,aviation connector, 1.0Vp-p, 75Ω |
| | Video Output | 1CH CVBS+1CH VGA output, 1.0Vp-p, 75Ω,Aviation,Support 1CH Full Screen,4CH Screen |
| | Preview | Support 1 channel and 4 channels preview.,Support Manual/Alarm Trigger full screen preview |
| | Resolution | 720P/D1/HD1/CIF, MAX:4 channels 720P |
| | Video Quality | 0-7 levels, 0 is the highest level. |
| | Video Standard | PAL: 100f/s , CCIR625 line,50field;<br>NTSC: 120f/s, CCIR525 line,60field;<br>CIF: 256Kbps ~ 1.5Mbps, 8 level video quality optional;<br>HD1: 600Kbps ~ 2.5Mbps, 8 level video quality optional;<br>D1: 800Kbps ~ 3Mbps, 8 level video quality optional;<br>720P: 4Mbps-6Mbps, multi level video quality optional |
| | Record Mode | The default setting is auto recording after power on. Timed recording, alarm trigger recording and manual recording are supported. |
| Audio | Audio Input | 4CH ,Aviation Plug |
| | Audio Output | 1CH,Aviation Plug |
| | Compression | G.726 compression, 8KB/s speed |
| Alarm Input | | 4Ch Alarm Input, kinds of alarm linkage support |
| Alarm Output | | 1CH Alarm Output |
| Communication interface | | 1CH RS232 or 1CH RS485 for optional |
| Position | | Support Built GPS/BD Module, built in G-sensor, can repaly and analyse vehicl e driven route. |
| wireless transmission | | Suppport Built-in 3G/4G wireless transmission function, WCDMA, CDMA2000, TDD-LTE, FDD-LTE.... |
| **Motion Detection** | | **Support motion detection alarm. (Can set the video recording duration time after alarm on platform.)** |
| G-Sensor | | Support G-sensor |
| Storage | SD | Dual SD Card,each max 128GB SD Card loop recording |
| | Upgrade | Support SD Card remote updating |

| | | |
|---|---|---|
| | File Format | .264 |
| | File System | Special FAT32 File System |
| Video Playback | Video Search | Search By Record Time/Record Type etc |
| | Playback | Max support 4CH Replay /Stop/Fast/Slow at same time |
| | | Support forward and backward play at the speed of: x 2,x4,x8,x16. |
| Voltage & Power | Power Management | Wide Voltage.Support Timed/Delay off |
| | Voltage Input | DC:+8V ~ +36V |
| | Voltage Output | +12V@2.5A，+5V@2.5A |
| | Power Consumption | Normal Working ＜14W , Stand-by status < 0.5W |
| Working Environment | Temperature | -20℃ to +70℃ |
| | Humidity | 20% to 80% |
| Security | Password | User/Admin 2 Level Different Password |
| others | Size | 112(W) x36(H) x138(D) mm |
| | Net Weight | 360g |

# Mostra do produto:

查询
系统设置
录像设置
网络设置
报警设置
外设设置
系统工具
系统信息
查询>>
录像搜索
图片搜索
日志查询
调度信息
通话记录

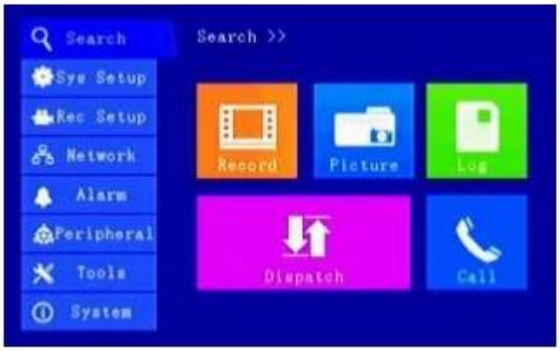
Search
Sys Setup
Rec Setup
Network
Alarm
Peripheral
Tools
System
Search >>
Record
Picture
Log
Dispatch
Call

# Product Introduction

## Device Series

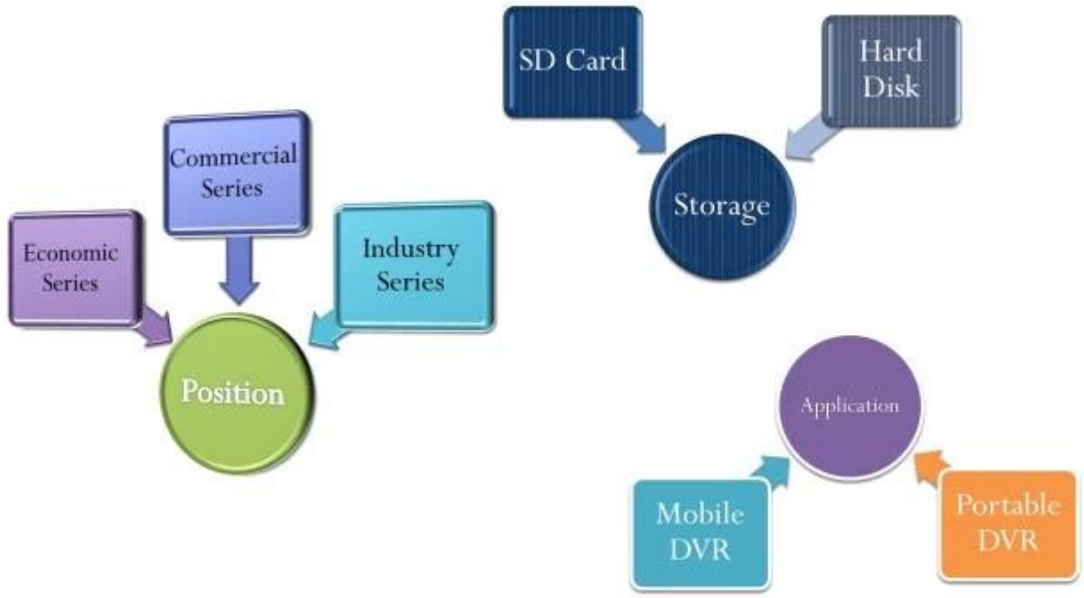






# Product Advantage

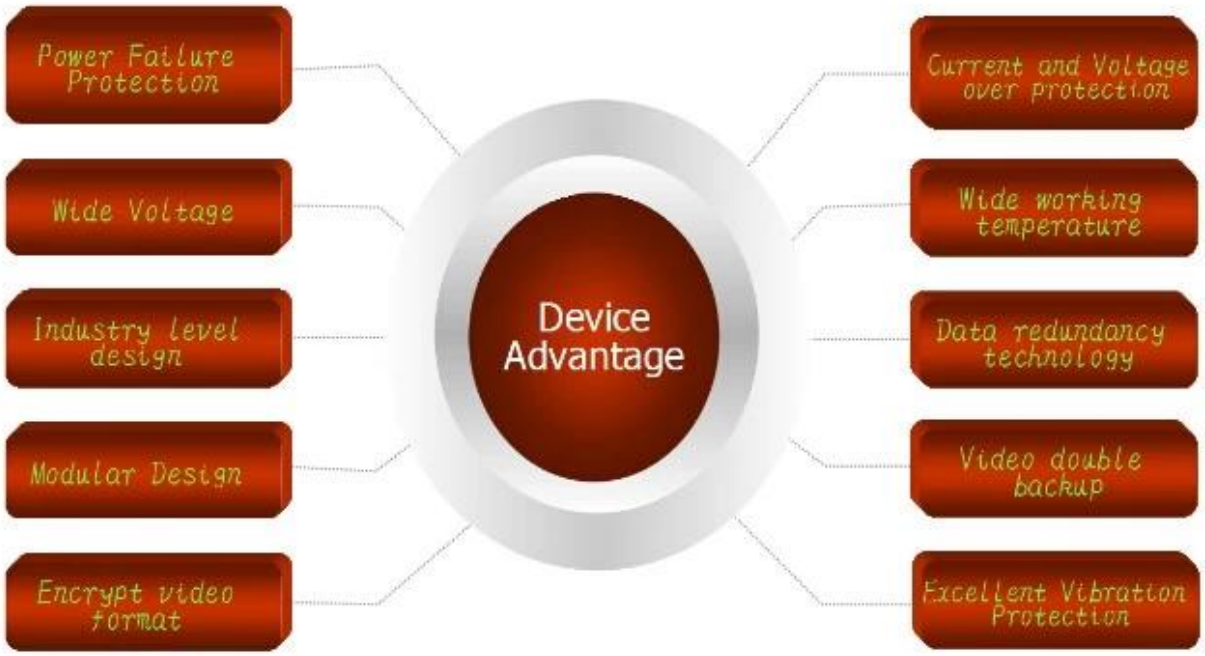

# Interface de gráfico de usuário do cliente

Aplauso

## FUNCTIONS

- Video& Audio real-time monitoring
- Online Vehicle Status
- Satellite Map
- GPS
- Video Storage
- Tracking Display
- Intercom
- Fuel Sensor
- G-Sensor
- Temperature-Sensor

certificado

# empresa e fábrica

Exibição:

CPSE2012-- Guangdong TV Report-Shenzhen Richmor

Bem-vindo a entrar em contato Susie para mais detalhes
Por e-mail / wechat,Wechat: Jobs2lovers
De Skype: rcmcctvsales4
De Trademanager: cn1001765398
Por telefone celular / Whatsapp: + 86-181 2626 3832 (Susie Zhou)
Por QQ:2355778106