


## مواصفات المنتج:

### Parameter Sheet

Item		Parameter
OS		Linux
Language		Chinese/English/Customized
Video Compression		H.264
OSD		Overlays information such as date time and vehicle ID
GUI	Graphical User Interface	Setup system parameters with the remote control.
Video Record System	Video Input	4CH 720P AHD input/SD input/mixed video input,aviation connector, 1.0Vp-p, 75Ω
	Video Output	1CH CVBS+1CH VGA output, 1.0Vp-p, 75Ω,Aviation,Support 1CH Full Screen,4CH Screen
	Preview	Support 1 channel and 4 channels preview.,Support Manual/Alarm Trigger full screen preview
	Resolution	720P/D1/HD1/CIF, MAX:4 channels 720P
	Video Quality	0-7 levels, 0 is the highest level.
	Video Standard	PAL: 100f/s , CCIR625 line,50field; NTSC: 120f/s, CCIR525 line,60field; CIF: 256Kbps ~ 1.5Mbps, 8 level video quality optional; HD1: 600Kbps ~ 2.5Mbps, 8 level video quality optional; D1: 800Kbps ~ 3Mbps, 8 level video quality optional; 720P: 4Mbps-6Mbps, multi level video quality optional
	Record Mode	The default setting is auto recording after power on. Timed recording, alarm trigger recording and manual recording are supported.
Audio	Audio Input	4CH ,Aviation Plug
	Audio Output	1CH,Aviation Plug
	Compression	G.726 compression, 8KB/s speed
Alarm Input		4Ch Alarm Input, kinds of alarm linkage support
Alarm Output		1CH Alarm Output
Communication interface		1CH RS232 or 1CH RS485 for optional
Position		Support Built GPS/BD Module, built in G-sensor, can repaly and analyse vehicle driven route.
wireless transmission		Support Built-in 3G/4G wireless transmission function, WCDMA, CDMA2000, TDD-LTE, FDD-LTE....
<b>Motion Detection</b>		<b>Support motion detection alarm. (Can set the video recording duration time after alarm on platform.)</b>
G-Sensor		Support G-sensor
Storage	SD	Dual SD Card,each max 128GB SD Card loop recording
	Upgrade	Support SD Card remote updating


	File Format	.264
	File System	Special FAT32 File System
Video Playback	Video Search	Search By Record Time/Record Type etc
	Playback	Max support 4CH Replay /Stop/Fast/Slow at same time Support forward and backward play at the speed of: x 2,x4,x8,x16.
Voltage & Power	Power Management	Wide Voltage.Support Timed/Delay off
	Voltage Input	DC:+8V ~ +36V
	Voltage Output	+12V@2.5A, +5V@2.5A
	Power Consumption	Normal Working < 14W , Stand-by status < 0.5W
Working Environment	Temperature	-20℃ to +70℃
	Humidity	20% to 80%
Security	Password	User/Admin 2 Level Different Password
others	Size	112(W) x36(H) x138(D) mm
	Net Weight	360g

**عرض المنتج:**

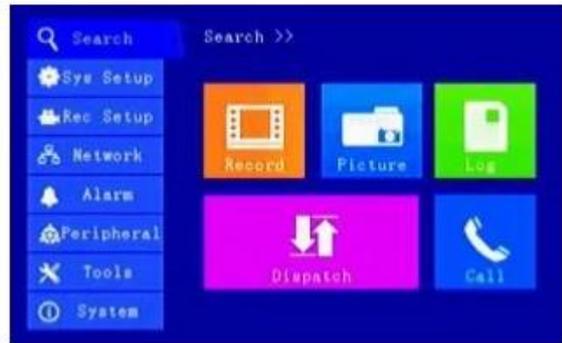


# Product Introduction

## Device Series

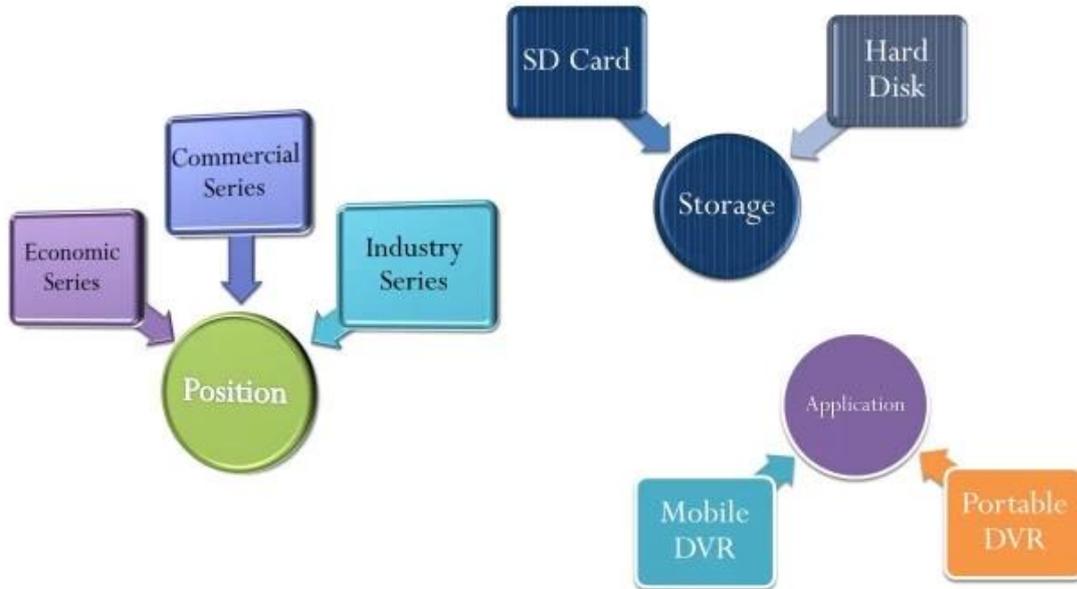

# Product Advantage

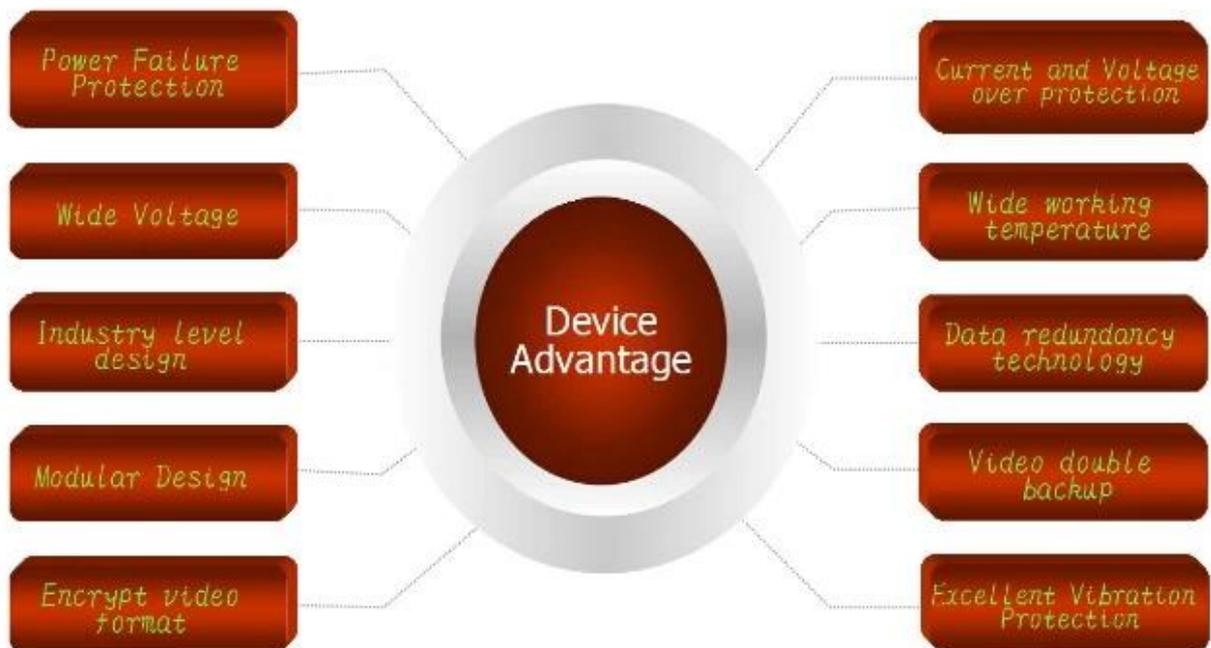

# العمل واجهة الرسم البياني المستخدم

## 移动视频监控平台

欢迎登录, RCMTST
系统
实时预览
电子地图
回放管理
信息管理
系统设置

终端列表 轮询列表 我的地图

搜索

- 监控中心(3/11)
  - 贵州(1/1)
    - 贵C A6446
      - CH1
      - CH2
      - CH3
      - CH4
- 桂KY7507
- 桂KY7569
  - 80024
  - 80119
  - D82868
  - 于NPS001
  - 桂KY7586
  - 桂KY7599
  - 贵B93017
  - 贵C87762

1 贵C A6446 - CH1 - 0 KB/5



2 贵C A6446 - CH2 - 24 KB/5



3 贵C A6446 - CH3 - 0 KB/5



4 贵C A6446 - CH4 - 0 KB/5



终端: 4 在线: 3 离线: 1 报警: 0 停车未熄火: 0 停车熄火: 0 定位无效: 0

导出 自动排序

终端	GPS时间	位置	速度	报警
贵C A6446	2016-03-14 09:50:09	贵州省遵义市习水县G4215(遵遵高速公路)	74.10 km/h(南)	
桂KY7507	2016-03-14 09:50:17	广西壮族自治区玉林市博白县人民中路38号	11.00 km/h(北)	
桂KY7569	2016-03-14 09:50:38	广西壮族自治区玉林市博白县X403	27.00 km/h(西北)	
桂KY7599	2016-03-14 09:49:03	广西壮族自治区玉林市博白县S216	0.00 km/h(东)	

地址 搜索

马临镇政府

贵C A6446

时间: 2016-03-14 09:50:09 速度: 74.10

公司: 遵义集团金融公司 司机: 陈国忠 13511881529

位置: 贵州省遵义市习水县G4215(遵遵高速公路)

状态: 在线, 3G, ACC开启, SD卡(存在), 视频监控 对讲 监听 抓拍 更多

贵C A6446



200米

运行时长: 09:01:04 在线数: 3 / 定损数: 1 / 欠费: 0 / 总数: 11 在线率: 27.27% / 定损率: 9.09%

Application

## FUNCTIONS

- Video & Audio real-time monitoring
- Online Vehicle Status
- Satellite Map
- GPS
- Video Storage
- Tracking Display
- Intercom
- Fuel Sensor
- G-Sensor
- Temperature-Sensor

**Richmor**

OEM & ODM Service

Brasil World Cup Supplier  
[www.rcmctv.com](http://www.rcmctv.com)



Truck  
Coach



School Bus  
Bus



Police Car  
Taxi



Support  
All Vehicles

شهادة





معرض:

**Richmor**

CPSE2012 in Shenzhen



CPSE2013

10.29-10.31

4 Booth we have

Welcome you !!!



CPSE2012-- Guangdong TV Report-Shenzhen Richmor



مرحبا بك في الاتصال **سوزي** لمزيد من التفاصيل

عن طريق البريد الإلكتروني / wechat, Wechat: Jobs2lovers

بواسطة سكايب: rcmctvsales4

بواسطة تراديمانجر: cn1001765398

(عن طريق الهاتف المحمول / واتس اب: + 86 181-2626 3832 (سوزي زو)

عن طريق QQ:2355778106