
Product Description

××



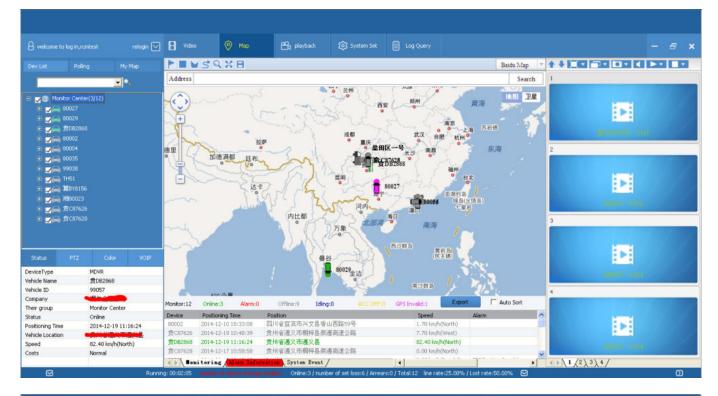

		M	lobile m	onitoring	and ma	nager	nent p	latform		
8 Welcome to log in , f	RCMTEST System 🖂	H video		🖰 Playback	l System Set		& Extend	Aco		- 8 ×
									a 🖬	
	-	1	継 (17586 -	CH1 - 10 KB/S	2	800	7586 - CH2 - 4 KB/S		Address	Search
Monitor Cent	n		A				THE .			18.83 22.8
041 02 03 04 04 04 04 04 04 04 04 05 04 04 05 04 05 06 04 05 05 06 06 06 06 06 06 06 06 06 06		3 2015-07-2014 100000 100000 2010000 20100000 20100000 20100000 201000000 201000000 2010000000 20100000000000000000000000000000000000				20216 - 95500 - 11000 - 03138 - 058 - 0405m-16 4 ≹077586 - 044 - 038]5 2015 - 07-23 11153155 №KV2566			-	社KY7586 Time:2015-07-23 11:53: Mileage:8.92 km Speed:0.00 km h(Northe Position:)一西社族自治 Status:(Online)ACC 00
C Ale C	146 11 17			FR				CH4		SD Card2Exist,Network Network:30 #EKY7586
Device type	MOVR	100		TELE , OLI , DIONAL DI	1/2		0.03138.058	0000-20	633	
Vehicle Name	棣 (17586	9.4.444	Sector Revealed							
Vehicle ID	20041	4>11	(2),3),4/							
Company		Particity Contract Alements Manual Address Office O								
Their Group	Monitor Center					1.2			-	
Ratus	Online	Bevice 88xy7569	Positioning Time 2015-07-23 11:53:47	Position 广西社族自治区玉林市	Rotheston	Spee	d Al m/h(West)	Au	Sta (On	
Positioning Time Location	2015-07-23 11:53:57 广西壮族自治区玉林市博自·	後の7586	2015-07-23 11:53:57	广西社族自治区玉林市			m/h(Northeast)		(On	-
Speed Costs	0.00 km/h(Northeast) Normal								200 *	
2000	TRUTING .	dia h Rea	itarian /Alara Tafe	rnation \ System Event	/				@ 2015 Baldu - Data @ Nav	AND & CONTRACT & DESIGN
Ø			~	main Online:6 / Numbe		and the second s				D

GPS Positioning & Overspeed Alarm

GPS data including Latitude, Longitude, and speed of vehicles will be saved along with video footages on to the SD card or hard disk, while playing the footages you can also check the the locations of your vehicles on map. Besides, alerts would be triggered while driving overspeed.





2TB +128GB Large Capacity Storage

Up to 2TB hard disk & 128GB SD Card supported at the same time for saving video footages, once the disk is full, the DVR will overwrite the earlier files to make space for new files, which means you can have the DVR recording all the time to look after your vehicle.

Alarm I/O Alarm & Alarm Recording

The DVR supports 6 I/O inputs and 1 alarm output. You can set those Inputs to record vehicle bracking, turning left/ right, door openning and more. Also, they can be simply used as a Panic Button, or work with other external sensors to trigger recording or send message to the monitor center.



×

8 CHANNEL 4G FULL D1 2TB+128GB HDD Mobile DVR

Main Features

HIS Solution, H.264 Compression, support 8CH D1 real-time video recording ;

3CH video output (2CH CVBS video, support Front&Rear output; VGA output for optional).

Exclusive pre-

allocate File System protect data completeness, prevent SD Card fragment, ensure date stably and complet ely.

8-36V wide voltage with low power consumption.

Unique UPS Technology ensures the integrity of record when power failure occurs, even can for 8-10s.

HDD+SD Card Storage (Support 2.5" HDD, max 128G SD Card) protect from Shock & Dust damage;suppor t USB port data backup and device update;

Support 2 USB ports, data backup and device upgrade.

Support 9CH alarm input (1CH analog input + 8CH IO alarm input), 2CH independent alarm output.

Support 2CH CAN interface.

Support HDD heating functions, can work in harsh environment.

Support GPS/BD/G-Sensor Extension module;

Realize real-time monitor through 3G/4G;

Support WIFI module, can download data automatically.

Support SMS remotely configure/control device;

Support Broadcast/Intercom/Text sent etc;can add oil sensor/temperature sensor/POS/LED Advertisement P anel;

Support voice call function.

Support OTA (On-The-Air) function, device can automatically update the new version, more convenient to maintain.

Support IOS/Android Phone Remote monitor.

Specifications

Item		Parameter				
os		Embeded Linux				
System Langu	lage	English/Chinese/Customized				
Video Compression		H.264 Video Compression				
OSD		Overlays information such as date time and vehicle ID				
GUI	Graphical User Interface	Support externally connect monitor screen. Setup system parameters with the remote control.				
	Video Input	8CH standard definition input,aviation connector, 1.0Vp-p, 75 Ω				
	Video Output	2 CVBS output+ VGA output(Optional) , 1.0Vp-p, 75Ω,Aviation,Support 1CH Full Screen,4CH Screen,9CH screen.				
	Preview	Support 1 channel ,4 channels and 9 channels preview.,Support Manual/Alarm Trigger full screen preview				
	Resolution	D1/HD1/CIF, MAX: 8 channels D1.				
Video Record	Video Quality	0 -7 levels, 0 is the highest level.				
System		PAL: 100f/s , CCIR625 line,50field;				
		NTSC: 120f/s, CCIR525 line,60field;				
	Video Standard	CIF: 256Kbps ~ 1.5Mbps, 8 level video quality optional;				
		HD1: 600Kbps ~ 2.5Mbps, 8 level video quality optional;				
		D1: 800Kbps ~ 3Mbps, 8 level video quality optional;				
	Record Mode	The default setting is auto recording after power on. Timed recording, alarm trigger recording and manual recording are supported.				

	Audio Input	8CH Aviation Connector
Audio	Audio Output	2CH, headphone connect at front panel, BNC Connect on Back panel
	Audion Compression	G.726 compression format, 8kb/s
Alarm Input		7CH Alarm Input,1CH AD Input, impulse speed input,Alarm Linkage
Alarm Output		2CH alarm Output,Support Light/Sound alarm sensor,Oil/Power cut
Interface		3CH RS232, POS/Fuel Sensor/LED Advertisement Connection
Interface		1CH 485 Interface, Connect PTZ Camera
Wireless		Support Built in 3G transmission,, WCDMA, CDMA2000,GPRS, EDGE;
WITEIESS		Built in 4G module optional, TDD-LTE, FDD-LTE
GPS		Support GPS
	HDD	Max 2.5" 2TB HDD
	SD	Max 128GB SD Card Mirror Recording Keep Data Safety
Storage	Updating	Support USB Updating, SD Card Updating,OTA Remote Updating
Storage	File Format	0.264
	File System	Special FAT32 File System
	USB	USB Interface on Front Panel for data back up by U Disk,Hard Disk
	Video Search	Search By Record Time/Record Type etc
Video Replay	Playback	Max support 4CH Replay /Stop/Fast/Slow at same time
	Flayback	Support forward and backward play at the speed of: x 2,x4,x8,x16
	Power Management	Wide Voltage.Support Timed/Delay off
Power	Voltage Input	DC:+6V ~ +36V
Consumption	Voltage Output	+12V-2.5A,+5V-2.5A
	Power	Working <5W
Working	Temperature	-20°C to +70°C
Environment	Humidity	20% to 80%
Security	Password	User/Admin 2 Level Different Password
Other	Size	200 (D)* 187(W)* 62(H) mm
other	Net Weight	1.90 Кд
Optional Functions	Voice Call	Support voice call each other
	TTS Voice Broadcast	Support TTS voice broadcast function.
Option	Serial Expand	Support LED Advertisement Panel,Oil Sensor,POS,Bus Station Broadcaster,Car OBD,ect. external device

Our Services



PC&Phone Monitoring



CMSV6 In Mobile Phone Have all in the palm of your

hand

Real-time monitoring via Mobile Phone Support iPhone, Android, iPad system



Video & Audio Monitoring Online Vehicle



PTZ control

Satellite Map

Tracking Display

Video Storage

Picture Snapshot

Voice intercom



FQA

- Q: During playback, the map doesn't show?
- A: Possible reasons are as follows;
- 1.Net cable did not connect to PC;
- 2.Net works, but the computer can not get to the Internet;
- Q: When SD card and HDD records, How is the record coverage?
- A: SD card and HDD will record circularly for each other. When they are full, they will delete the original video records respectively.

Q: The device was opened, HDD was installed, but the device can not record successful. A: 1.Check the HDD/SD Card was formatted or not, the unformatted HH/SD Card can not be used. Enter into the Main Menu – System Setup – Formatting the new installed HDD/SD Card.

2. If the recording channel is closed, if set the timing recording, it can not recording when it beyond the period of timing recording.

3. If the HDD is connect well, if the HDD/SD light is on.



Richmor Brand Package

Standard Package

×

CAMERA Accessory



Shipping

Strong cooperated with DHL/UPS Etc for fast and safety delivery.

a. 2-5 days after payment cleared for sample order.


b. 5-10 days after payment cleared depends on order quantity for bulk order.



Exhibition

Richmor

CPSE2012 in Shenzhen

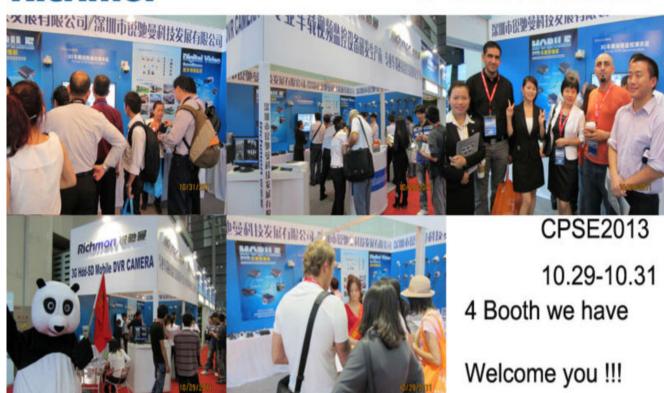



CPSE2012-- Guangdong TV Report-Shenzhen Richmor







Skype:rcmcctvsales5