

Shenzhen Richmor Technology Development Co., Ltd es una empresa /fabricante de alta tecnología de China especializada en productos de videovigilancia móviles digitales e inteligentes, con ricas experiencias para desarrollar /producir /vender durante más de años (principalmente incluye megapíxeles 3G /4G AHD Mobile Mobile Mobile DVRS, 3G/4G Megapixels Mobile NVRS, DVR móvil HDD HDD de 4ch/8ch, DVR móvil HDD, DVR portátiles de policía 3G/4G, cámara de vehículo HD, cámara PTZ de vehículo HD ... etc. como un DVR móvil de China profesional/China móvil/[fabricante de dashcam](#), nos dedicamos a proporcionar a nuestros clientes tecnologías más avanzadas, productos de alta calidad y servicio profesional.

- **Diseño de cámara (mini tamaño) con DSM, función ADAS AI integrada**
- **4G GPS Wifi, grabación de tarjeta SD de 4ch/3ch**
- **Inalámbrica: antenas, altavoz, construcción de micrófono**
- **Instalación fácil: conexión corta a potencia/encendido, y la cámara ADAS frontal**
- **Lo más efectivo: Right Comera Angel mejor para el conductor, detecciones de ADAS.**
- **Software gratuito: software AI CMS para gestión de flotas gratis con servicio delicado**



**Risk control**  
Risk control Weapon

### DSM Vehicle AI Camera system

Easy installation Plug and play High Accuracy

 AI	 4CH Video	 4G	 BD/GPS
 SOS	 Intercom	 SD Card	 GSENSOR




## 4G + GPS + G-SENSOR + ADAS + DSM + speaker + MIC

Super mini size, easy installation and short wiring to save time and cost of labors.



## Supports Max 4CH HD video recording

DSM camera built-in, external 3CH cameras, comprehensive monitoring with AI function.

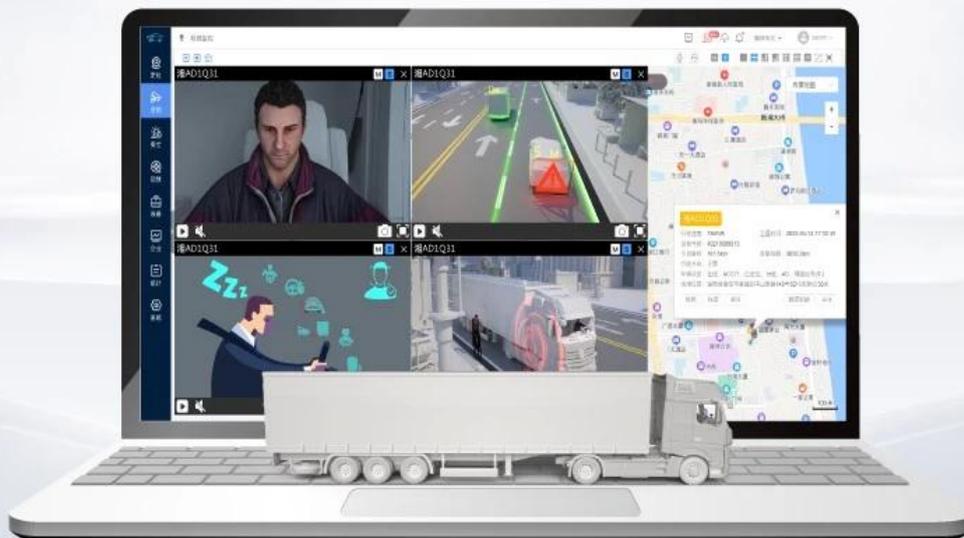

## Integrated DSM camera & DSM algorithm

Dangerous driving behaviors detection: Fatigue (eye closed, yawning),  
Distraction, Smoking, Calling, driver abnormality, etc.




## Integrated ADAS algorithm

Connect ADAS camera, for LDW, FCW, PCW...

### Neat Wiring


New design for wiring to make it neat and improves AI performance with more than 5 years AI project experience.

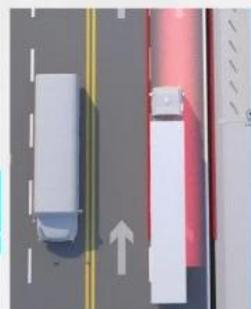



## Driver face recognition

Driver ID Face recognition benefits to the attendance of fleet management: avoid illegally replacing shifts, non-compliant drivers, to regulate drivers and operation management.



## Optional BSD blind spot Detection

Connect the BSD camera for blind area detection and voice reminder: pedestrians, bicyclist, motorcyclist detection, voice reminder inside and outside with lighting speaker.



## Specification

Basic Parameter	Operation system	Linux
	Network type	2G, 3G, 4G
	RAM	2GB
	DSM cam	HD 720P cam
	Other cam	HD 720P cam
Hardware Function	Position	Support dual module GPS+BD; Precision ≤10m(95%);
		starting time, warm reboot ≤5s, cold reboot ≤45s
	WiFi	2.4G; IEEE 802.11b/g/n
	Speaker	8Ω, 1W, with audio cavity
	Microphone	Single microphone, support echo and noise elimination
	G-sensor	3-axis acceleration sensor
	Loop denoising	Compatible with hardware loop denoising
3G/4G wireless	Frequency	UMTS:850/900/1900/2100MHz HSUPA/HSDPA:850/1900/2100MHz GSM/GPRS/EDGE:850/900/1800/1900MHz
	Frequency	UMTS:850/900/1900/2100MHz HSUPA/HSDPA:850/1900/2100MHz GSM/GPRS/EDGE:850/900/1800/1900MHz
	Module type	Support build-in 3G/4G wireless transmission, TDD-LTE, FDD-LTE
	protocol	UDP,TCP/IP
	voice service	HR/FR/EFR and AMR
	message service	SMS
	Frequency	EGSM850/900 2W, GSM1800/1900 1W, WCDMA 0.25W
Interface	Aviation interface	The extension harness supports aviation extension of 2 channel video
	USB interface	1*micro USB;
	SIM card slot	SIM card slot*1
	TF card slot	SD card slot*1+TF card slot*1 (For recording video)
	Communication Interface	1CH RS232
	Can	Can interface extension
	Network	Ethernet interface extension
	Alarm Output	4CH IO alarm input
	Alarm Output	1CH switch output, linkage sound and light alarm, oil cut-off, etc.
Light/Button	Indicator light	5
	Alarm button function	SOS
Antenna	BD/GPS antenna	Built-out
	4G antenna	Built-in
	WIFI antenna	Built-in
Shut Down Mode	ACC OFF	When ACC is off, then DVR shutdown.
	Delay mode	When the car power off, you can setting time to delay shutdown the DVR.
	ultra-low power sleep	GPS position can continue to report in sleep state; keep location updated
Power	Power input	8-36V wide voltage input
	Working current	
	Low-power mode	
Others	Working temperature	-40℃-70℃
	Storage temperature	-40℃-85℃
	Size and weight	100*88*98